

# Programmable Temperature & Humidity Controller *TH500*



- High Accuracy Control
- History management
- 300 pattern setting
- Temperature & Humidity PID group
- Convenient communication data management
- Various output type

# Programmable Temperature & Humidity Controller

## CONVENIENT SETTING BY TOUCH PANEL TYPE

### FEATURES

- High Accuracy Control
- History management
- 300 pattern setting
- Temperature & Humidity PID group
- Convenient communication data management
- Various output type(20 points)



Input		
Input signal	Temperature	RT, DPT100 Q, DIN43760)
	Humidity	4 ~ 20 mA d.c I - 5 V d.c)
	Sampling time	500 ms
Measuring range	Temp. range	-100.00 ~ 200.00 °C
	Humi. Range	0.0 ~ 100.0 %RH
Accuracy	Temp. side	±0.1% (Max. range)
	Humi. side	±1% (Max. range)
Contact input(D/I)		8 points (a 4 points x 2), 8V d.c 10 mA Max
Allowable line resistance	R, T, D	10 Q max/1 line
Input resistance	DV voltage input Approx.	1MΩ at V d.c)
Allowable signal impedance	DV voltage input Approx.	2kΩ max


Communication		
Interface Standard	EIA-RS232, 485, USB V1.1	
Max. connection lines	RS232	1:1
	RS485	1:32 (Address 1~999)
Communication type	RS232	Full Duplex
	RS485	4 lines Full Duplex / 2 lines Half Duplex
Synchronization	RS232/485	Synchronous mode
Communication distance	USB V1.1	Approx. 10 m
	RS232	Approx. 10 m
	RS485	Approx. 12 km
Communication speed (Kbps)	USB V1.1	Approx. 12 Mbps
	RS232/485	9.6 / 19.2 / 38.4 / 57.6 / 115
Data Length	RS232/485	7/8 Bits
Parity Bit	RS232/485	NONE / EVEN / ODD
Stop Bit	RS232/485	1 / 2 Bit(s)
Protocol	USB V1.1	Bulk Mode
	RS232/485	PC/LINK / PC/LINK+CFC
Response Time	RS232/485	0~9.999 (x10.0μs)

Output		
Contact output (D/O)	Relay contact 12 points Open collector 8 points	NO : 30 V d.c 5 A Max, 250 V a.c 5 A Max. NC : 30 V d.c 1 A Max, 250 V a.c 2 A Max. 24 V d.c 300 mA Max.
Control output	S.S.R	ON : 24 V d.c Pulse voltage (Resistive load Min, 800 Q) OFF : 0.1 V d.c Max, Cycle time : 1 ~ 1,000 sec Output limit : 0.0 ~ 100.0 % Resolution : 0.1 % or 10 ms whichever is smaller
	Current output	4 ~ 20 mA d.c (3.2 ~ 20.8 mA d.c) Renewal time : 500 ms Resistive load : 600 Q max Output limit : -5.0 ~ 105.0 %
Retransmission output	Current output	4.0 ~ 20.0 mA d.c
	Renewal time	500 ms
	Resistive load	600 Q max
	Output limit	-5.0 ~ 105.0 %
Accuracy	Output type	Process value(PV), Set value(SV), Output volume(MV) selectable
	Accuracy	S.S.R control output : ±0.1% of F.S Resolution : Approx. 1,000 Current control output : ±0.025 % of F.S Resolution : Approx. 4,000

Operation Environment	
Ambient temperature	0 ~ 50 °C
Ambient humidity	20 ~ 90 %RH (No condensation)
Storage temperature	-25 °C ~ 70 °C
Storage humidity	5 ~ 95 %RH (No condensation)
Insulation resistance	20 MΩ Min (Between 1st - 2nd - Ground, 500 V d.c)
Dielectric strength	2500 V a.c (Between 1st - 2nd - Ground), 1 minute
Vibration resistance	10 ~ 55 Hz, Width 0.75 mm, 3 directions 4 times, 5 minute/cycle
Shock resistance	147 m/s <sup>2</sup> , 3 directions 3 times
Dimensions	183(W) x 144(H) x 94(D)
Weight	Approx. 2.35 kg (in packing condition)

### Operation screen

After you finish to connect & turn on the power, The operating screen will be shown as below. Select a proper screen among 3 types.

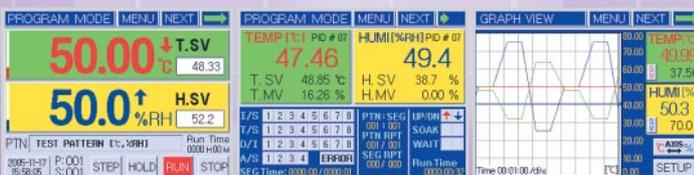

The 1st Operation screen

The 2nd Operation screen

Graph display screen

### Error Display screen

The indication of errors through sensor disconnection and external DI is displayed in the operating record indication screen.

Run history	NEXT	ESC
05-04 09:32:44 T. SENSOR BURNOUT		
05-04 09:32:44 H. SENSOR BURNOUT		
05-04 09:44:32 FIX-RUN START		
05-04 09:44:34 RESET BY T. BURNOUT		
05-04 09:45:02 FIX-RUN START		
05-04 09:45:03 RESET BY T. BURNOUT		
05-04 11:33:43 T. SENSOR BURNOUT		
05-04 11:35:43 H. SENSOR BURNOUT		
05-04 11:38:15 FIX-RUN START		
05-04 11:38:17 RESET BY H. BURNOUT		

Operating record screen



### Supply voltage

Power supply : 100 – 240 V a.c.  
 Frequency : 50 – 60 Hz  
 Power consumption : 20 VA

### Display

Screen standard : Color STN LCD (115.17 × 86.37 mm)  
 Number of Pixels : 320X240 Pixel, 256 Colors  
 Back light : CCFL  
 Life of back light : Approx. 20,000hrs.  
 Touch type : 4 wire resistive touch screen  
 Language : English

### PID setting group

The TH500 is equipped with the total 16 PID ZONES. As shown in the chart below, the four temperature zones and four humidity zones are combined with each other.

T.AT GAIN	13	14	15	16
H.AT GAIN	9	10	11	12
PID ZONE	5	6	7	8
MANUAL	1	2	3	4

Temperature (°C)	Humidity (%RH)
P: 5.00 % I: 240.0 s	P: 5.00 % I: 240.0 s
HYS: t D: 60.0 s	HYS: t D: 60.0 s

### Manu screen

Menu screen is consist of function setting menu, system setting menu, program setting menu and convenient to set.

FUNCTION SETUP	DATE/TIME RESERVE SETUP
PROGRAM SETUP	GRAP/LOG SETUP

Function setting menu

PATTERN SETUP	PROGRAM NAME SETUP
REPEAT/LINK SETUP	PATTERN MANAGE
WAIT/ALARM SSV SETUP	

Program setting menu

PTN NO.	SEG	TEMP SV	HUMI SV	Hour	Min	Wait	T/S	ALARM
001	25.00	80.0	000	01	-	-	1 2 3 4	
002	25.00	80.0	000	01	-	-	1 2 3 4	
003	50.00	60.0	000	01	-	-	1 2 3 4	
004	50.00	60.0	000	01	-	-	1 2 3 4	

System setting menu

### Contact input(D/I) & Contact output(D/O)

Contact input is consist of 8 points and indicated in English. Also, contact output is consist of 20 points(Relay 12 points/ Open collector 8 points). The contact output can appoint an inner signal output, time signal, alarm output, output by basic operating, increase, maintenance or decrease of temp, and humi) and output for each section.

### Function

Measuring input	Bias	Temperature 1 point : -100.00 ~ 1000.00 °C Humidity 1 point : -100.0 ~ 100.0 %RH
	Scaling	DC voltage(V d.c) : According to convert range
	In put filter(LPF)	2 ~ 180 second
	Pattern	300 Pattern
	Segment	6,000 Segment(100 segment / 1 pattern)
	P.I.D Group	16 group(Temp. 4 zone× Humi. 4 zone)
	Auto tuning	According to set value, auto tuning is operating
	Proportional band	0.00 ~ 100.00 % (In case of 000 %, ON/OFF control)
	Integral time	0.0 ~ 6,000 sec(0 sec = OFF condition)
	Derivative time	0.0 ~ 6,000 sec(0 sec = OFF condition)
	ON/OFF control	Proportional Band (P) is 0
	Direct/Reverse action	Select Direct or Reverse action in control output 0, 1 ~ 300.0 (°C) (In case of Humidity, Temperature of Humidity or conversion value)
	ON/OFF Hysteresis	
	Fuzzy	Select ON/OFF
	Retransmission output	Signal Process value(PV), Set value(SV), Manipulated Value(MV) selectable
	Scaling	Auto scaling (4 ~ 20 mA d.c)
	Setting alarm	System alarm : 4 points *Setting range : 0.1 ~ 100.0 % 4points / 1 pattern, ON/OFF set available for each segment
	Type of alarm	High / Low deviation alarm etc. 20 types of alarms
	Process alarm	Temperature : -100.00 ~ 200.00 °C Humidity : 0.0 ~ 100.0 % RH
	Deviation alarm	Temperature : -300.00 ~ 300.00 °C Humidity : -100.0 ~ 100.0 % RH


### Pattern setting

Set a segment for each pattern as below.

PTN NO.	SEG	TEMP SV	HUMI SV	Hour	Min	Wait	T/S	ALARM
001	25.00	80.0	000	01	-	-	1 2 3 4	
002	25.00	80.0	000	01	-	-	1 2 3 4	
003	50.00	60.0	000	01	-	-	1 2 3 4	
004	50.00	60.0	000	01	-	-	1 2 3 4	

### Graphic screen display


Because all saved Data file is in text mode, you can see the content of saved data file with any editor, word-processor or Excel.

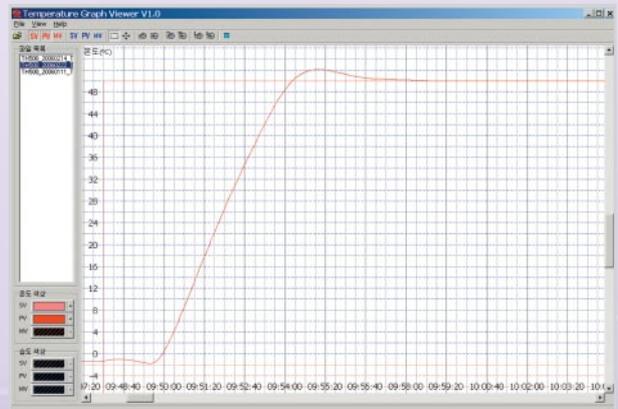


Graphic display screen

● Connection Diagram


• UNIT BODY

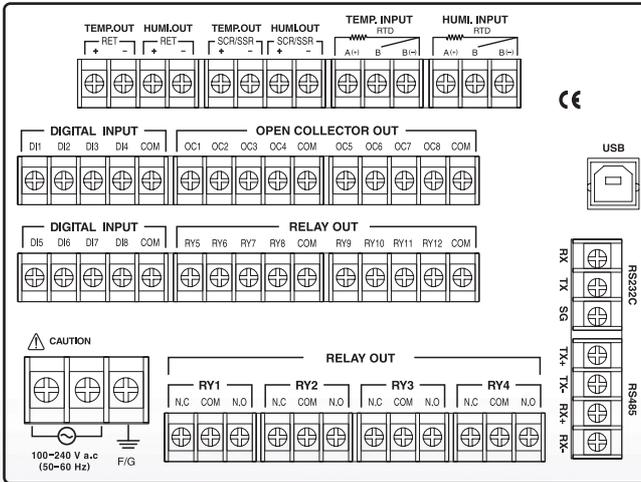


• SEPARATE BODY

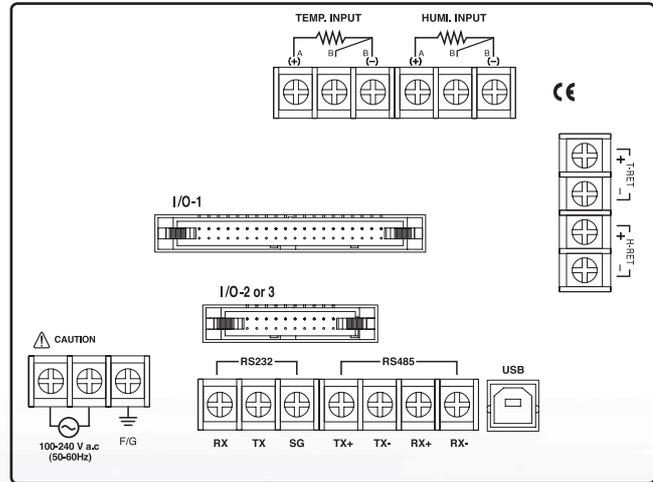


• SEPARATE BODY I/O BOARD 1

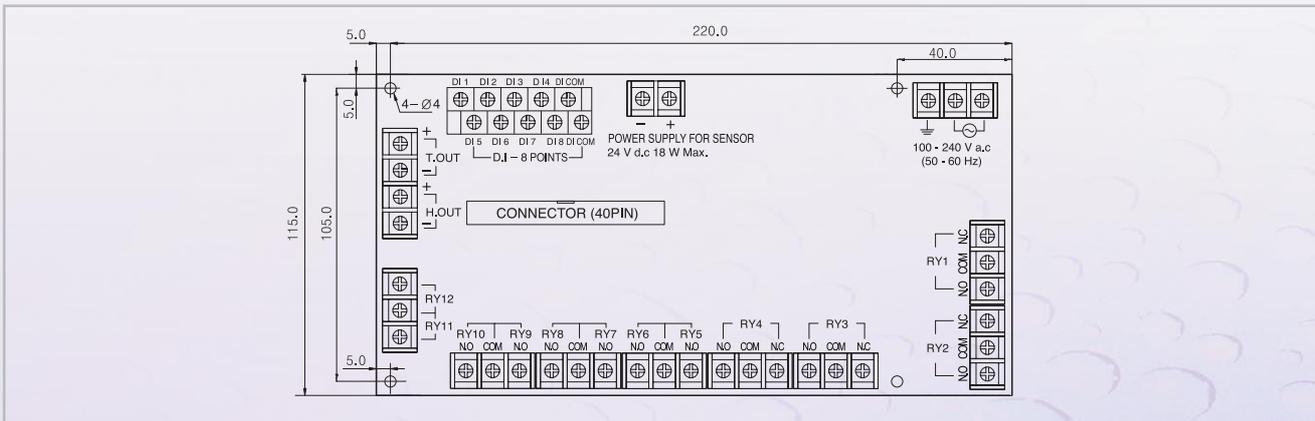


• SEPARATE BODY I/O BOARD 2

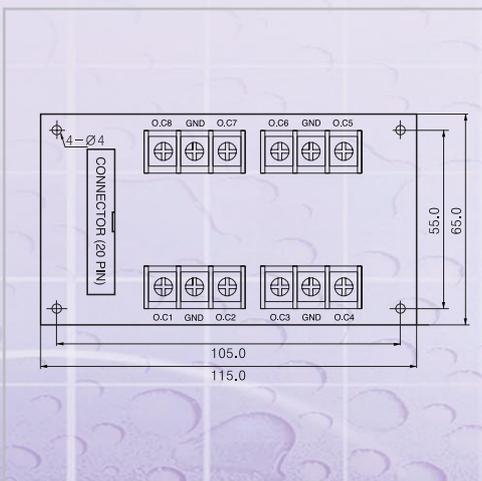

• SEPARATE BODY I/O BOARD 3

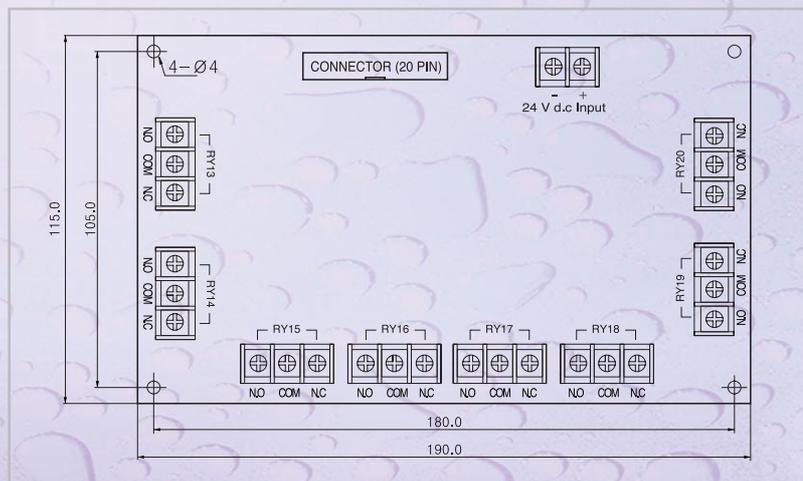

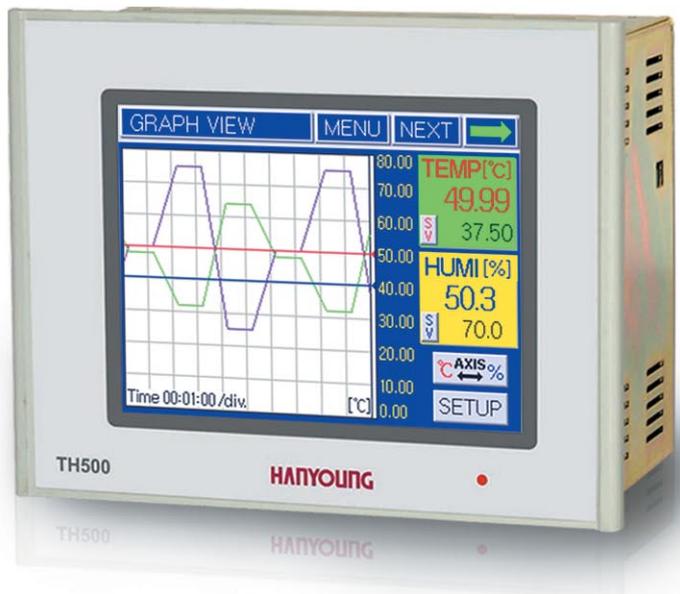


● Approval Standards

Safety : UL61010 (Under process)  
CE : EN61010-1 (Under process)


● Model and Suffix code

Model	Suffix code	Description
TH500	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	TEMPERATURE-HUMIDITY PROGRAMMABLE CONTROLLER
Type	N	None
	1	UNIT BODY Sensor input : Temperature (Pt100Ω / 0 - 5 V dc) Humidity (Pt100Ω / 0 - 5 V dc)  Digital input (D/I) : 8 points Control output : Temperature (SCR/SSR 1 point); Humidity (SCR/SSR 1 point) Retransmission : Temperature (4 - 20 mA dc 1 point), Humidity (4 - 40 mA dc 1 point) Contact output : Relay (1a1b) 4 points; Relay (1a) 8 points Transistor output : Open Collector 8 points COMMUNICATION : RS232C, RS485, USB
	2	SEPARATE BODY Sensor input : Temperature (Pt100 Ω / 0 - 5 V dc) Humidity (Pt100 Ω / 0 - 5 V dc)  Retransmission : Temperature (4 - 20 mA dc 1 point) Humidity (4 - 40 mA dc 1 point) Communication : RS232C, RS485, USB
Option	N	None
	1	I/O BOARD 1 SMPS (24 V dc, 18 W) + D/I 8 points + RELAY (1a1b : 4 + 1a : 8) 12 points
	2	I/O BOARD 2 O.C 8 points
	3	I/O BOARD 3 Relay(1a1b) 8 points I/O BOARD 1 + I/O BOARD 2
	4	SMPS (24 V dc, 18 W) + D/I 8 points + Relay (1a1b : 4+1a:8) 12 points + O.C 8 points I/O BOARD 1 + I/O BOARD 3
5	SMPS (24 V dc, 18 W) + D/I 8 points + Relay (1a1b:4+1a:8) 12 points 12 points + Relay(1a1b) 8 points	
Communication	N	None
	1	ETHERNET (Preparing)

● Dimension (Unit : mm)

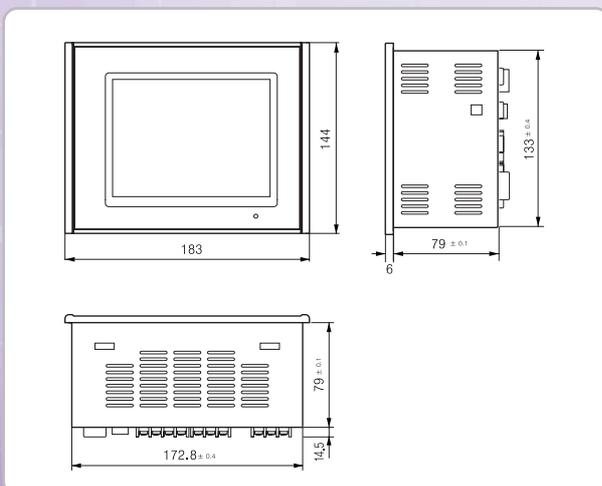

● Panel cutout (Unit : mm)

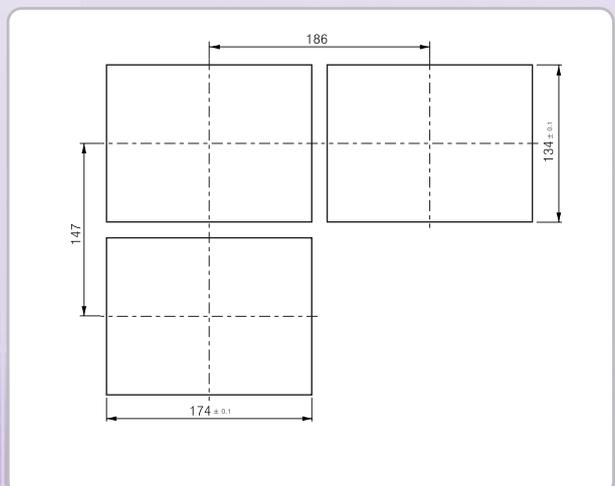



**HANYOUNG NUX CO., LTD.**

1381-3, Juan-Dong, Nam-Gu Incheon, Korea  
TEL: (82-32)876-4697 FAX: (82-32)876-4696  
Http://www.hynux.com E-mail: hyelec01@hynux.com

All specifications are subject to change without prior notice, and when you place order, please consult HANYOUNG NUX CO., LTD.

[www.hynux.net](http://www.hynux.net)

