


CUTAWAY V7 MINIATURE BASIC SWITCH

Thermoplastic material meets KC 250 arc tracking test per VDE 0630, DIN 53 480, and meets UL flammability rating per UL94V-0.

Mounting hole size options for #4 or 3mm screw.

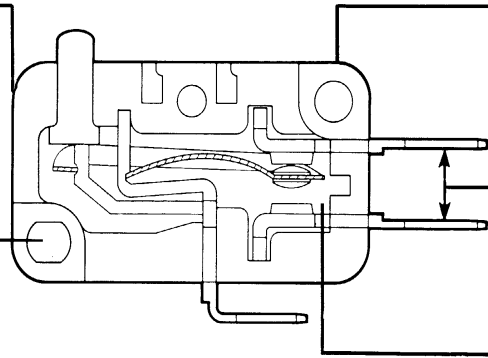


4mm (min) spacing between current carrying parts and mounting hardware.

"E" terminals designed to provide 3mm (min.) spacing with uninsulated receptacles installed. Terminals meet DIN 46 244 dimensions.

Internal construction meet 3mm (min.) creepage and clearance requirement.


QUICK-CONNECT (mm/in.)

D8




D8 terminals are European approved when used with electrical ratings B, D, or E. International approving agencies require that switches with these terminals have insulated receptacles or connector.

E8



E8 terminals are European approved when used with electrical ratings B, D, or E.

E9




E9 terminals are European approved when used with electrical ratings B, C, D, or E.


PRINTED WIRING BOARD (mm/in.)

These terminals interface with snap-on receptacles and other components from AMPNODU interconnection system.


PO1

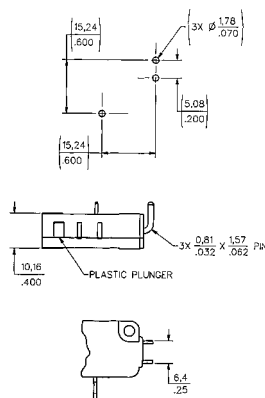

PO2

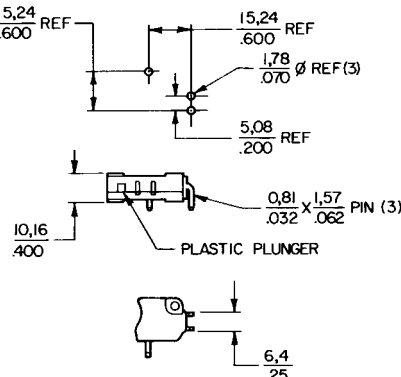

PO7

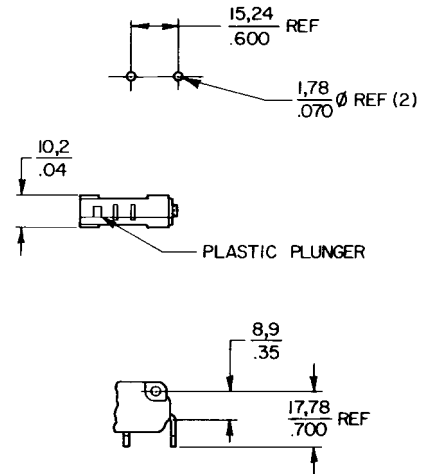

V7 Series Available Terminals

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective material and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during that period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is **in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

While we provide application assistance, personally, through our literature, and through the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change at any time without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

Sensing and Control serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, or the name of the nearest Authorized Distributor, contact a nearby sales office or call:

TELEPHONE

1-800-537-6945 (USA)
1-800-737-3360 (Canada)
1-815-235-6847 (International)

FAX

1-815-235-6545 (USA)

INTERNET

www.honeywell.com/sensing
info@micro.honeywell.com

Honeywell

MICRO SWITCH
Sensing and Control
Honeywell Inc.
11 West Spring Street
Freeport, Illinois 61032



www.honeywell.com/sensing