

SERIE INTERNAZIONALE RIPARABILE
DAL BASSO

Caratteristiche Tecniche:

Pressione massima di lavoro (PS): 350/330 bar

Pressione di prova (PT): PSx1,43

Corpo: in acciaio forgiato, sabbiato e verniciato

Temperatura d'impiego (TS): da - 20° C a + 80° C

Sacca standard: adatta a oli minerali e a fluidi non aggressivi

Montaggio: posizione verticale(valvola azoto verso l'alto)

Rapporto di compressione:

- consigliato: $P_2/P_0 = 2.5$
- massimo: $P_2/P_0 = 4$



Vita meccanica: il numero di cicli è inversamente proporzionale all'aumento del rapporto di compressione

Garanzia: vedi pagina dedicata

Parti di ricambio: vedi pagina dedicata

Disponibile:

- corpo verniciato internamente ed esternamente in epoxy
- sacche per temperature d'impiego da -40 °C a +130 °C
- esecuzione a 350 bar per HB 20/25/35/50
- Connessione con flangia SAE 3000 - SAE 6000

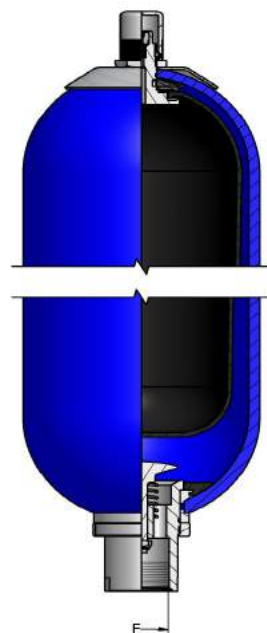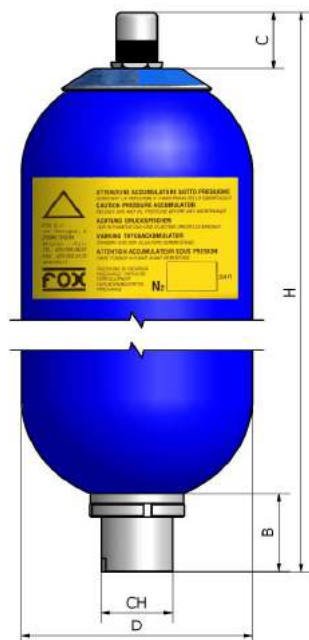

INTERNATIONAL SERIES BOTTOM
REPARABLE

Technical Features:

Maximum working pressure (PS): 350/330 bar

Test Pressure (PT): PS x 1,43 bar

Body: forged steel, sand and painted

Working temperature (TS): from -20° C to +80° C

Standard bladder: can be used with mineral oils and non corrosive fluids

Installation position: vertical position (nitrogen valve upward)

Compression ratio:

- recommended: $P_2/P_0 = 2.5$
- maximum: $P_2/P_0 = 4$

Mechanical life: the number of cycles is inversely proportional to the increase of the compression ratio

Warranty: see dedicated page

Spare parts: see dedicated page

Special execution:

- inside and outside epoxy painted body
- bladders for working temperatures from -40° C to +130° C
- execution at 350 bar for HB 20/25/35/50
- Connection with flange SAE 3000 - SAE 6000



Conforme a:

- 97/23/CE - PED
- 94/9/CE - ATEX Group II Cat 2
- ASME-USTAMP
- GOST-R (Russia)
- SELO (China)



According to:

- 97/23/CE - PED
- 94/9/CE - ATEX Group II Cat 2
- ASME-USTAMP
- GOST-R (Russia)
- SELO (China)

Tipo	Pressione Max	Volume Azoto	Precarica N ₂ max	H	D	C	B	CH	Connessione Idraulica	Portata Max	Peso
Type	Max Pressure	Nitrogen Volume	Max N ₂ precharge						Hydraulic Connection	Max Flow	Weight
	Bar	Lt	Bar	mm	mm	mm	mm	mm		Lt/min	Kg
HB2.5	350	2.5	230	495	114	25	60	50	1“¼ BSP	220	12
HB4.5		4		410	168	47				400	16
HB6		6		505						350	19.5
HB10		10		775						300	36
HB10/2	330	10		550	223	45	100	70	2” BSP	630	48
HB20		18.5		870		600				53	
HB25		24.9		1030		570				62	
HB35		33.5		1400		540				84	
HB50		49		1900		500				115	