

Oildyne

550 Series Hydraulic Power Units

Pressures to 207 bar (3000 psi)

Flows to 11.4 lpm (3 gpm)



550 Series Hydraulic Power Units

We are pleased to introduce our new 550 Series AC hydraulic power units. The 550 Series combines the features and benefits our customers and markets have requested in a durable and economical package.

The integral motor, pump and reservoir are complemented with a full line of Parker D03 and cartridge valve options. Add a linear or rotary actuator and you have a complete hydraulic system solution for your application.

These high quality power units are ideal for industrial machine tool clamping circuits, dock levelers, food processing, hose crimping, scissor lift, presses, and a myriad of AC applications. Let them go to work for you.

Your local Parker sales representative will be pleased to provide further information.



Features

- Numerous motors up to 3 hp
- 6 pump sizes – flows from 1 to 11.4 lpm (1/4 to 3 gpm)
- Externally adjustable relief valve
- Variety of reservoirs
- 207 bar (3000 psi) capability
- D03 pad or standard P and T ports

Typical Applications

- Machine tool clamping
- Dock levelers
- Man lifts
- Scissors lifts
- Wheelchair lifts
- Trash compactors
- Hose crimpers
- Boat lifts
- Presses
- Commercial ovens



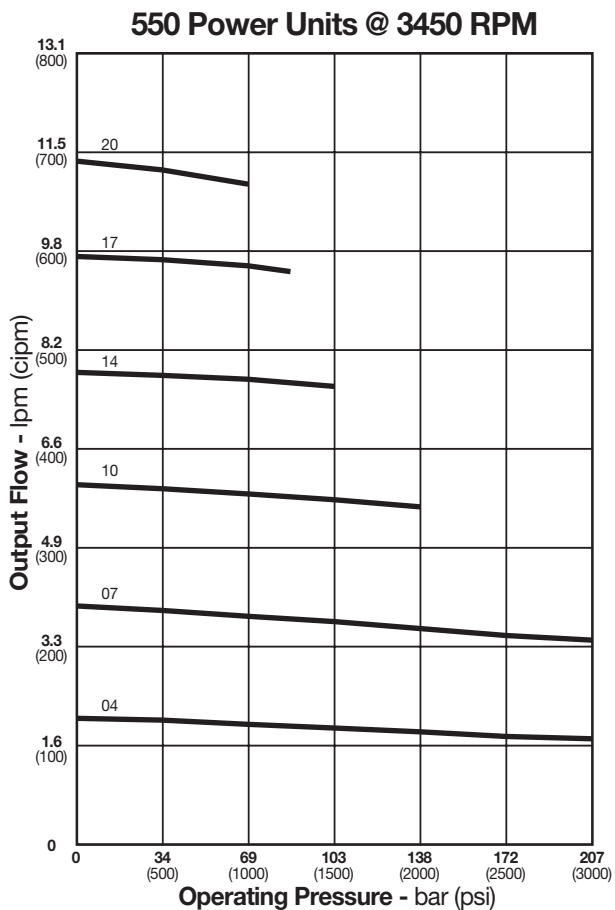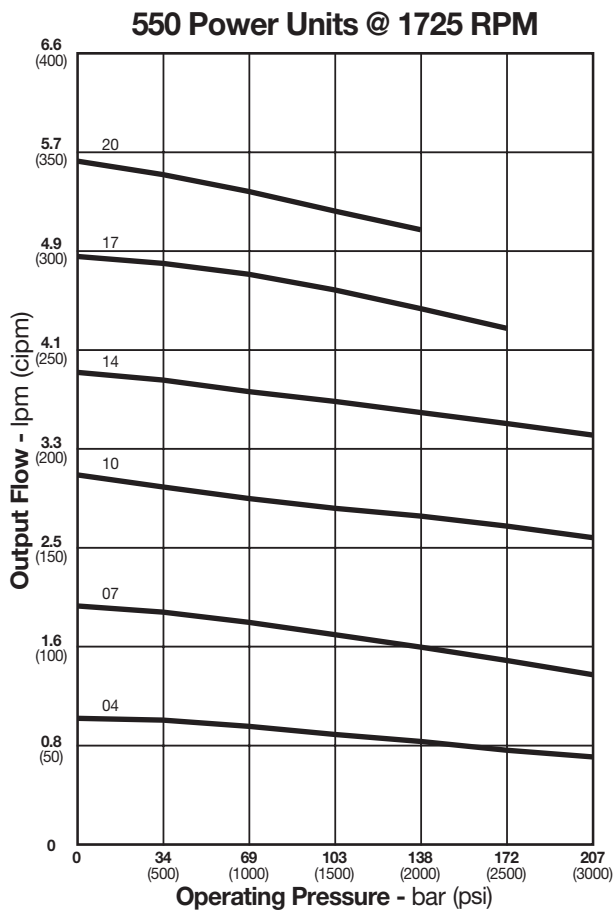


Performance data based on ATF @ 21°C (70°F)

Motor Horsepower Recommendations at Flow/Pressure

Pump Size	Nominal GPM		Pressure (PSI)					
	@1725	@3450	500	1000	1500	2000	2500	3000
04	1/4		.50 HP	.50 HP	.50 HP	.50 HP	.50 HP	.50 HP
04		1/2	.50 HP	.50 HP	.50 HP	.75 HP	1.0 HP	1.0 HP
07	1/2		.50 HP	.50 HP	.50 HP	.75 HP	1.0 HP	1.0 HP
07		1	.50 HP	.75 HP	1.0 HP	1.5 HP	2.0 HP	2.0 HP
10	3/4		.50 HP	.50 HP	.75 HP	1.0 HP	1.5 HP	1.5 HP
10		1 1/2	.50 HP	1.0 HP	1.5 HP	2.0 HP	3.0 HP	3.0 HP
14	1		.50 HP	.75 HP	1.0 HP	1.5 HP	2.0 HP	2.0 HP
14		2	.75 HP	1.5 HP	2.0 HP	3.0 HP		
17	1 1/4		.50 HP	1.0 HP	1.5 HP	2.0 HP	2.0 HP	
17		2 1/2	1.0 HP	2.0 HP	3.0 HP			
20	1 1/2		.50 HP	1.0 HP	1.5 HP	2.0 HP		
20		3	1.0 HP	2.0 HP	3.0 HP			

Note: Performance data is for reference only

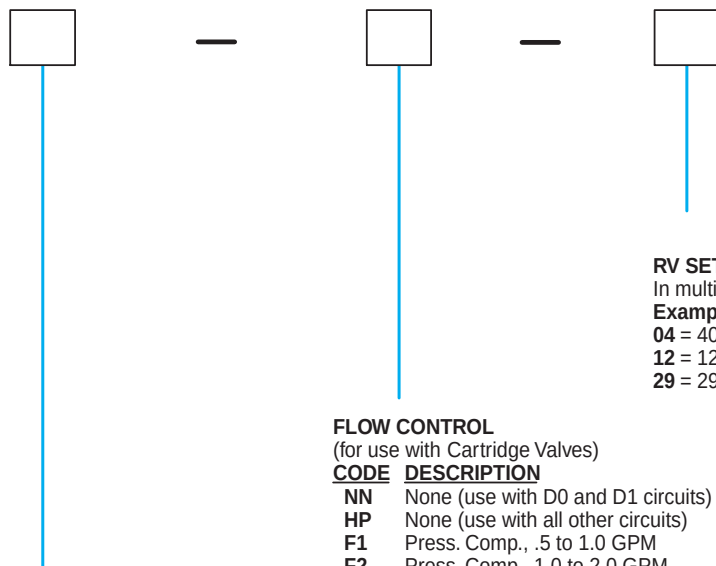**RV SETTING**

In multiples of 100 psi

Examples

04 = 400 psi

12 = 1200 psi

29 = 2900 psi

4-WAY VALVE (ALL D03 SIZE)**CODE DESCRIPTION (For use only with Circuit Codes D0 and D1)**


NNN	No 4-Way Valve Included
01Y	Closed Center, 120 VAC, Conduit Connectors
01T	Closed Center, 240 VAC, Conduit Connectors
01K	Closed Center, 12 VDC, Conduit Connectors
01J	Closed Center, 24 VDC, Conduit Connectors
02Y	Open Center, 120 VAC, Conduit Connectors
02T	Open Center, 240 VAC, Conduit Connectors
02K	Open Center, 12 VDC, Conduit Connectors
02J	Open Center, 24 VDC, Conduit Connectors
07Y	Float Center, 120 VAC, Conduit Connectors
07T	Float Center, 240 VAC, Conduit Connectors
07K	Float Center, 12 VDC, Conduit Connectors
07J	Float Center, 24 VDC, Conduit Connectors
08Y	Tandem Center, 120 VAC, Conduit Connectors
08T	Tandem Center, 240 VAC, Conduit Connectors
08K	Tandem Center, 12 VDC, Conduit Connectors
08J	Tandem Center, 24 VDC, Conduit Connectors
30Y	Single Solenoid, 120 VAC, Conduit Connector
30T	Single Solenoid, 240 VAC, Conduit Connector
30K	Single Solenoid, 12 VDC, Conduit Connector
30J	Single Solenoid, 24 VDC, Conduit Connector
Y01	Closed Center, 120 VAC, Hirschmann w/out Plugs
T01	Closed Center, 240 VAC, Hirschmann w/out Plugs
K01	Closed Center, 12 VDC, Hirschmann w/out Plugs
J01	Closed Center, 24 VDC, Hirschmann w/out Plugs
Y02	Open Center, 120 VAC, Hirschmann w/out Plugs
T02	Open Center, 240 VAC, Hirschmann w/out Plugs
K02	Open Center, 12 VDC, Hirschmann w/out Plugs
J02	Open Center, 24 VDC, Hirschmann w/out Plugs
Y07	Float Center, 120 VAC, Hirschmann w/out Plugs
T07	Float Center, 240 VAC, Hirschmann w/out Plugs
K07	Float Center, 12 VDC, Hirschmann w/out Plugs
J07	Float Center, 24 VDC, Hirschmann w/out Plugs
Y08	Tandem Center, 120 VAC, Hirschmann w/out Plugs
T08	Tandem Center, 240 VAC, Hirschmann w/out Plugs
K08	Tandem Center, 12 VDC, Hirschmann w/out Plugs
J08	Tandem Center, 24 VDC, Hirschmann w/out Plugs
Y30	Single Solenoid, 120 VAC, Hirschmann w/out Plug
T30	Single Solenoid, 240 VAC, Hirschmann w/out Plug
K30	Single Solenoid, 12 VDC, Hirschmann w/out Plug
J30	Single Solenoid, 24 VDC, Hirschmann w/out Plug

Hydraulic Fluid


Any clean hydraulic oil with a viscosity of 150 to 300 SUS at 38°C (100°F) is acceptable. If another type of fluid is needed, please consult the factory.

Temperature Range


Normal operating range is -7°C to 60°C (+20°F to +140°F). Please consult the factory for applications outside this range.

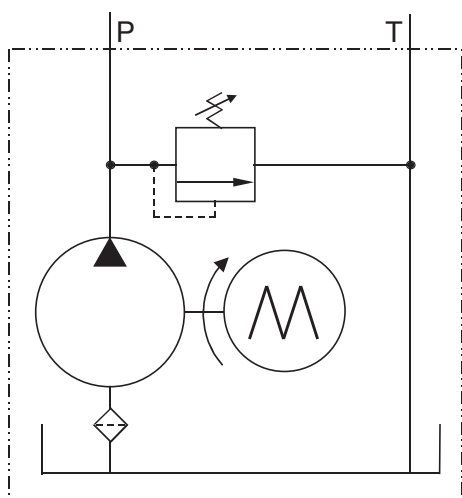


"SA" CIRCUIIT

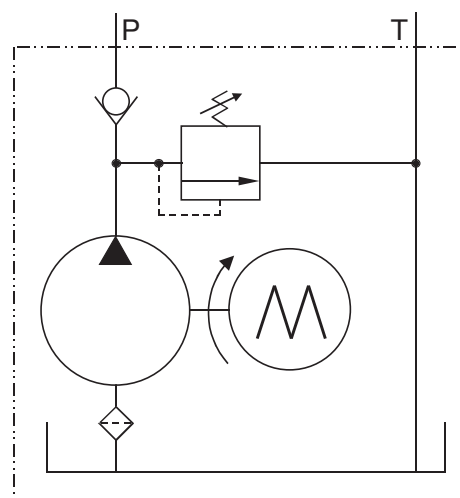


"SW" CIRCUIIT

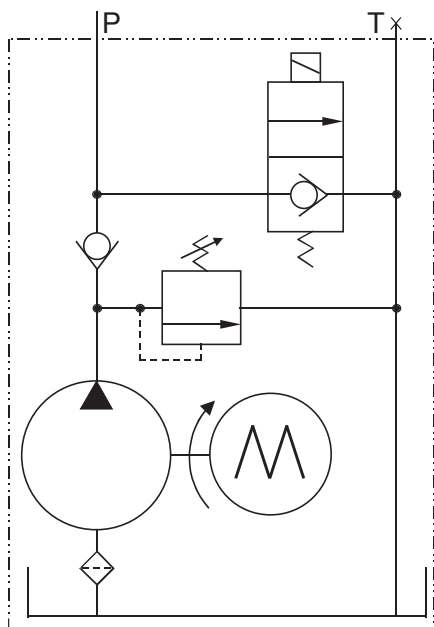


"S1-S4, P1-P4" CIRCUIITS

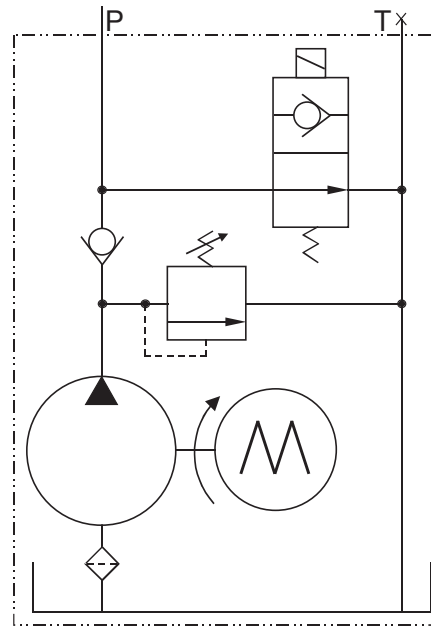


"S5-S8, P5-P8" CIRCUIITS

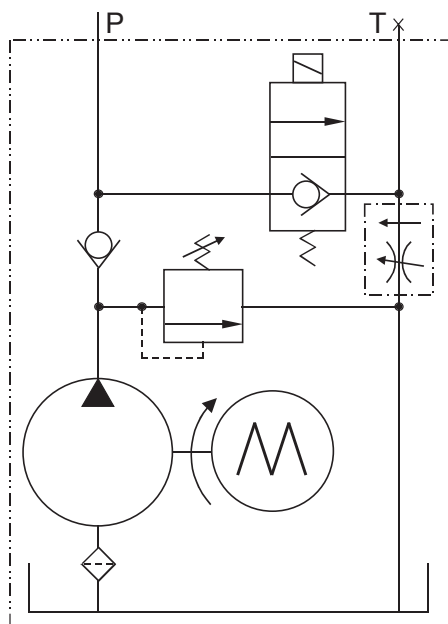


"S1-S4, P1-P4" CIRCUITS WITH
PRESSURE COMPENSATED FLOW
CONTROL F1 OR F2

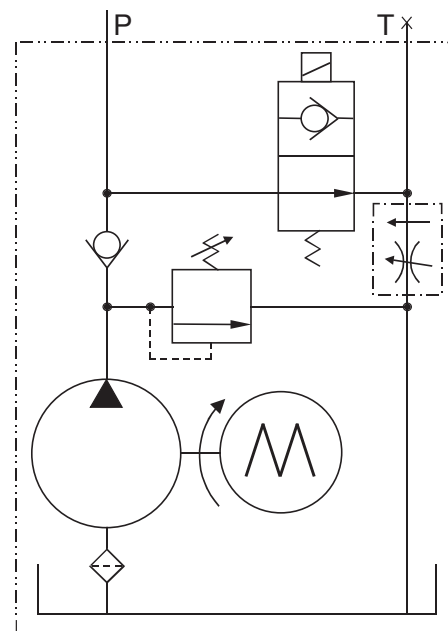


"S5-S8, P5-P8" CIRCUITS WITH
PRESSURE COMPENSATED FLOW
CONTROL F1 OR F2

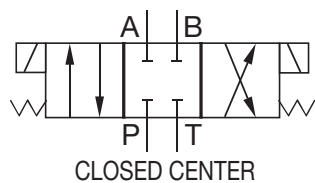


CLOSED CENTER

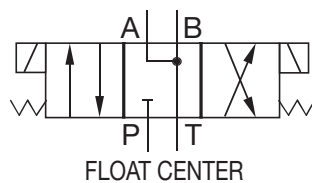


FLOAT CENTER




SINGLE SOLENOID

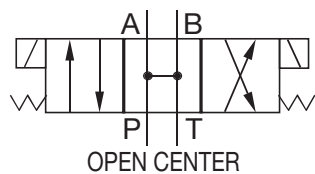


OPEN CENTER

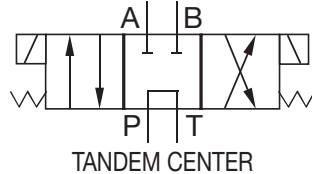

TANDEM CENTER

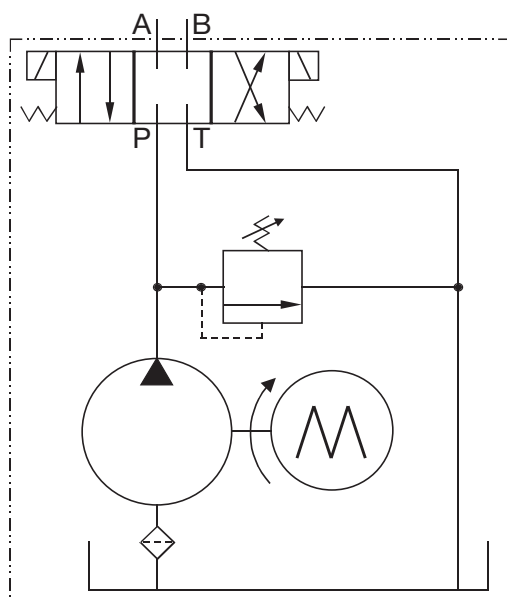


"D0" CIRCUIT (D03 VALVE TO BE SELECTED)

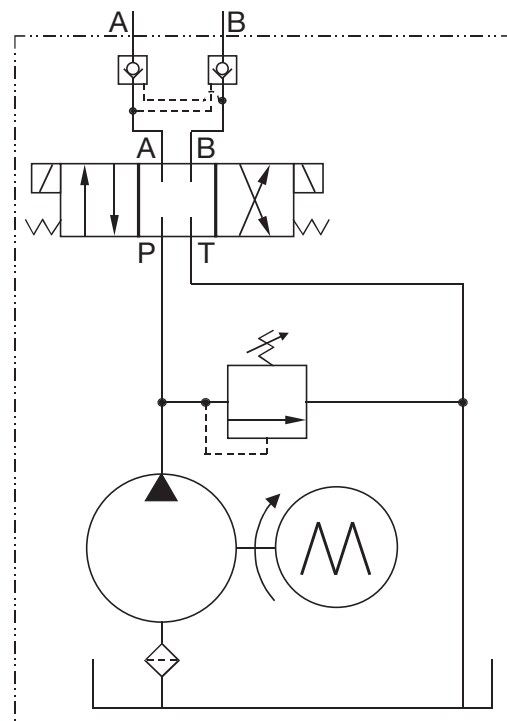


"D1" CIRCUIT INCLUDES MANAPAK DUAL P0
CHECK VALVE (D03 VALVE TO BE SELECTED)

Dimensions

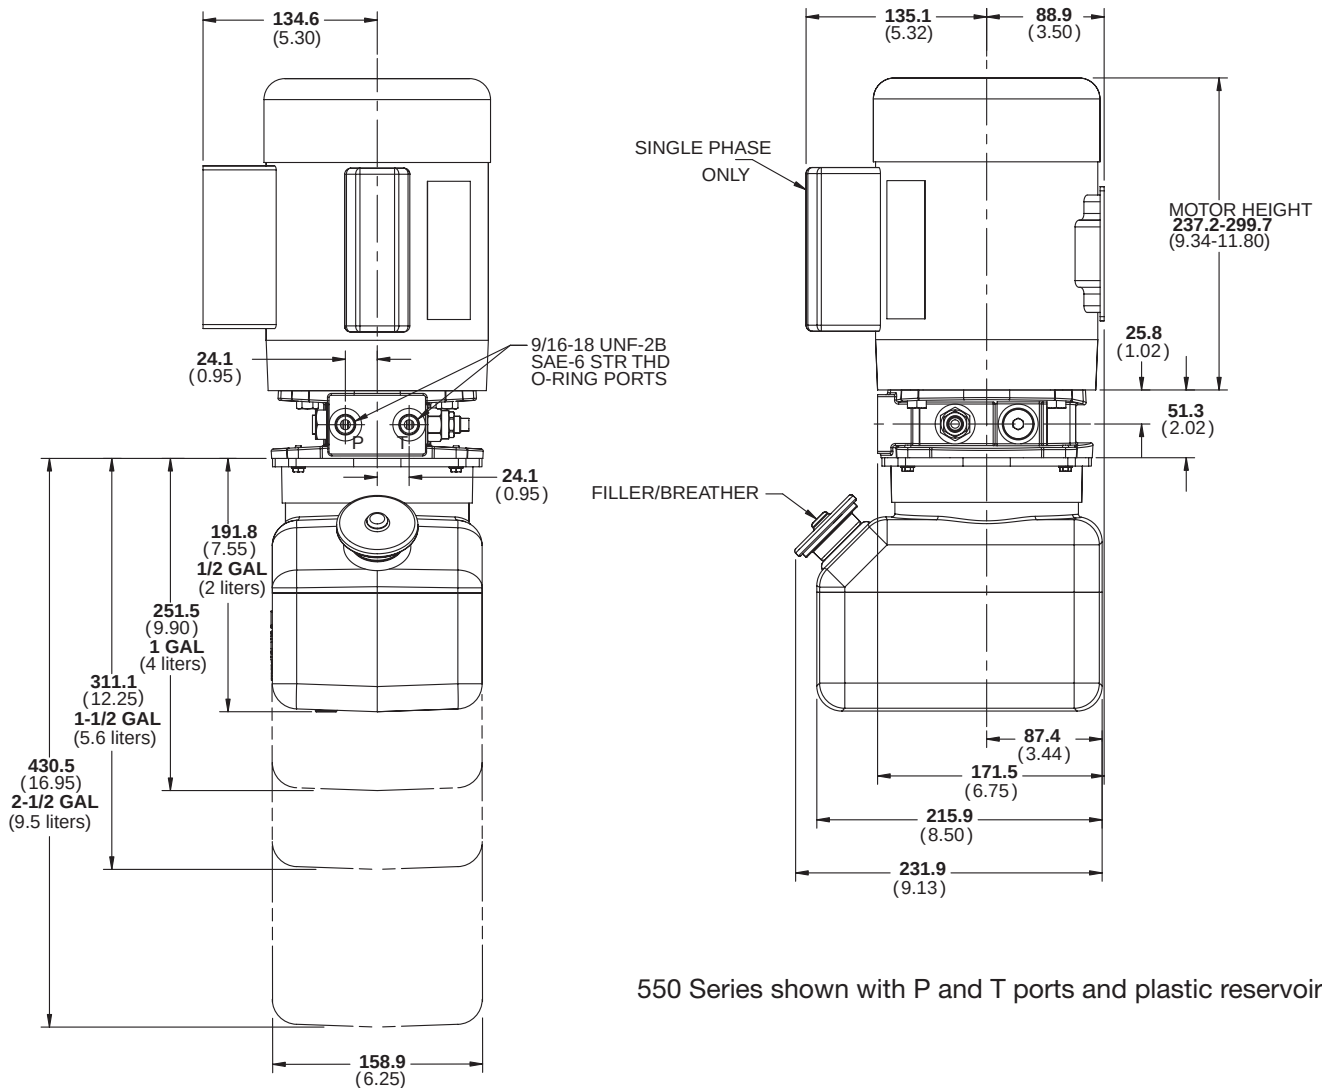


550 Series shown with P and T ports and plastic reservoir

Note: When mounted in the horizontal configuration the 2½ gallon plastic reservoir must be supported




Motor foot dimensions are common to all 550 Series electric motors

Note: All dimensions in mm (inches).

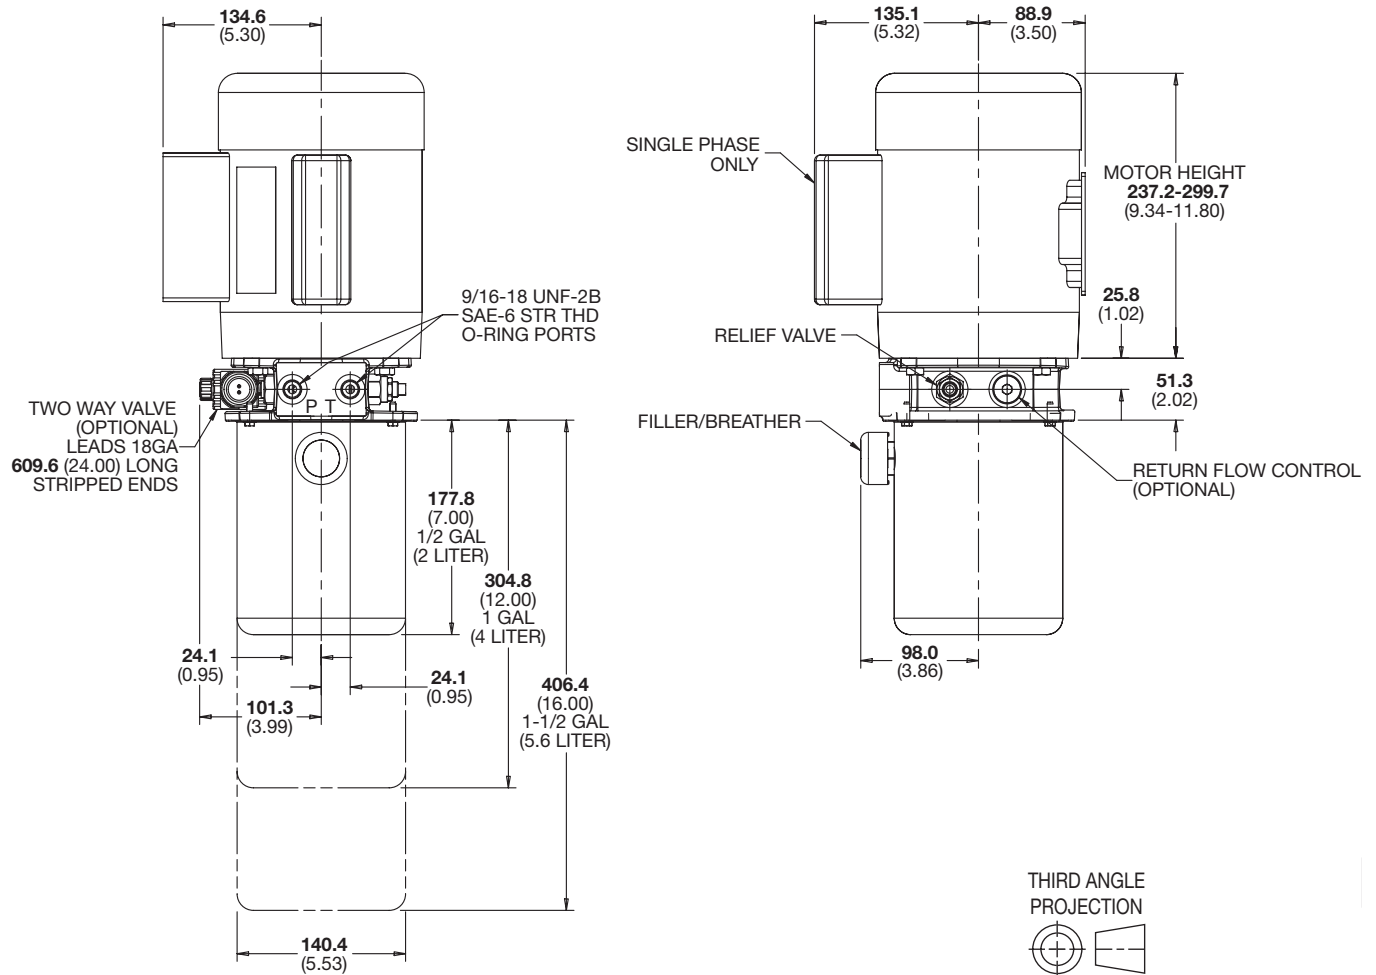Dimensions**Hydraulic Power Units
550 Series**

550 Series shown with optional solenoid
2-way valve and steel reservoirs

Note: All dimensions in mm (inches).

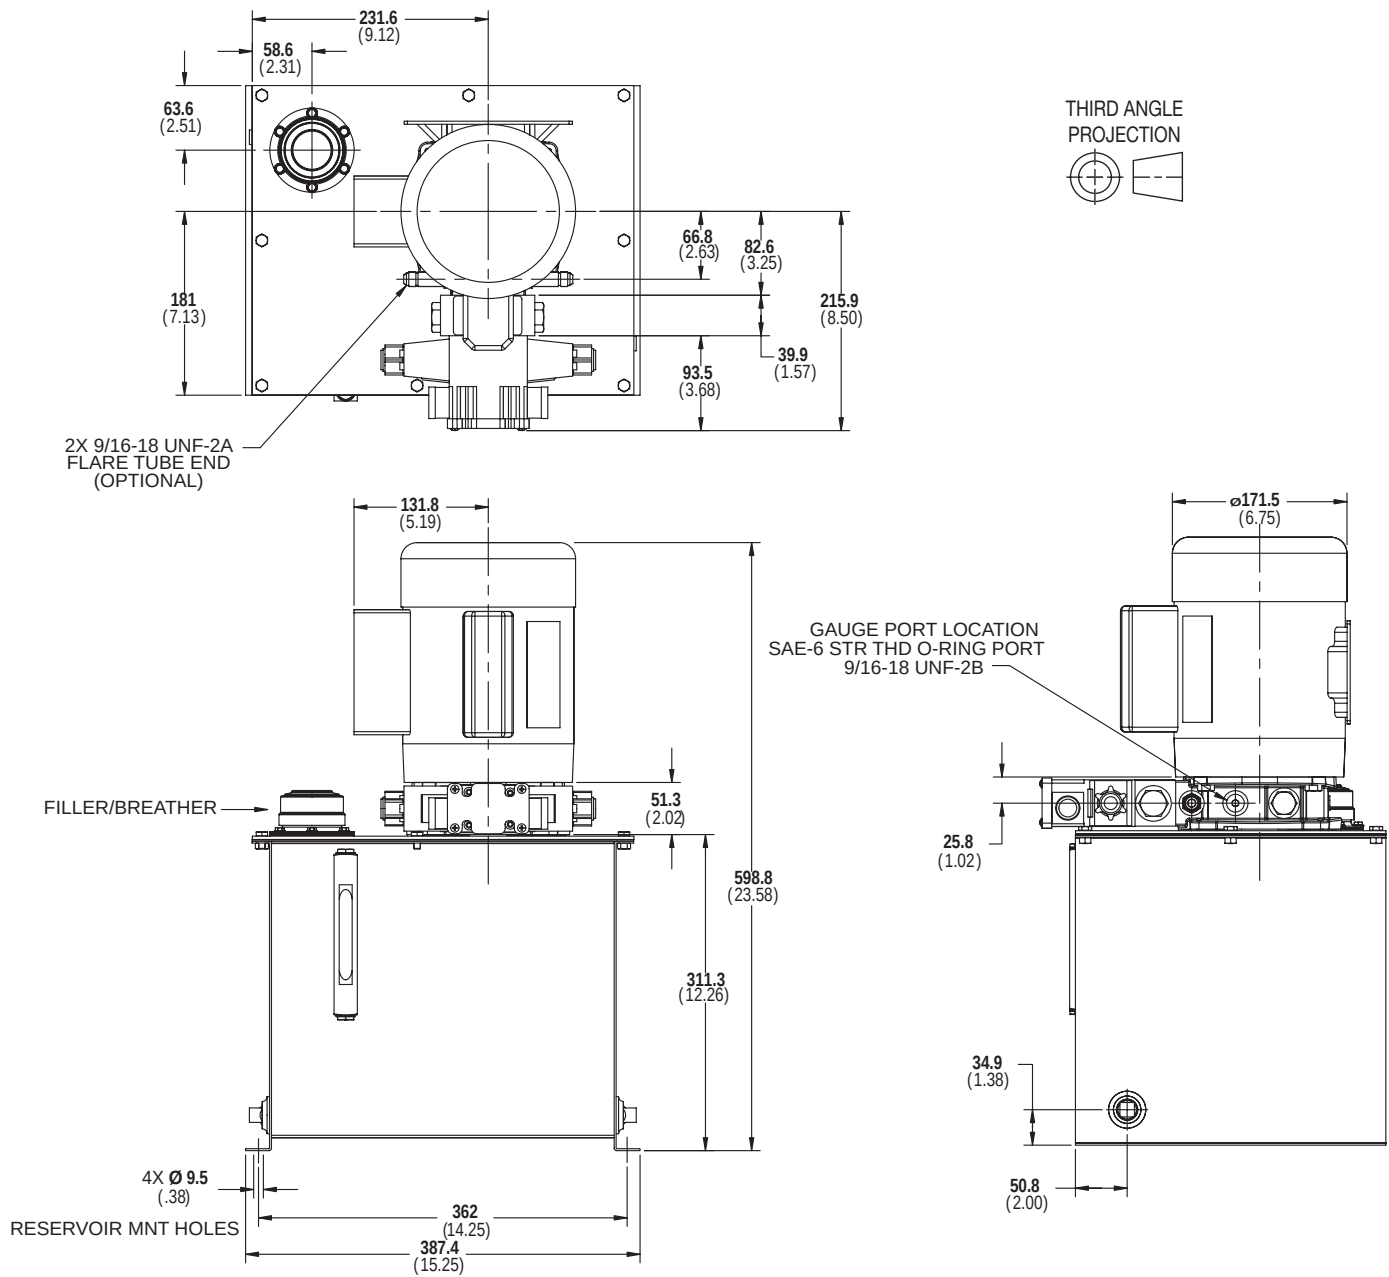

550 Series shown with D03 valve, Manapak block and 5 gallon reservoir

Note: All dimensions in mm (inches).