

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Parker Global Air Preparation System

Catalog 0750-2 US



ENGINEERING YOUR SUCCESS.

Global Air Preparation System



DECLARATION OF COMPLIANCE (ROHS)

European Directive 2011/65/EU – RoHS (Restriction of certain Hazardous Substances in electrical and electronic equipment), restricts the use of the 6 substances in the manufacture of specified electrical equipment.

Lead: Product containing lead and its compound (except for applications of lead as an alloying element by weight in steel up to 0.35%, in aluminium up to 0.4% and in copper alloys up to 4% and in circuit board solder) must not exceed 0.1% by weight

Mercury: The concentration level must not exceed 0.1% by volume

Cadmium: The concentration level must not exceed 0.01% by volume

Hexavalent Chromium:

This is a corrosive protective finish used on our product line. Where this finish is utilized the Chromate solution is Hexavalent (Chrome 6) free.

Polybrominated Biphenyls (PBB):

The concentration level must not exceed 0.1% by weight. This substance is not known to be in any of our products.

Polybrominated Diphenyl Esters (PBDE):

The concentration level must not exceed 0.1% by weight. This substance is not known to be in any of our products.



Following Ignition Hazard Assessments performed on the non-electrical Global Air Preparation products they are in accordance with the requirements of EN 13463-1:2009, it was considered that the equipment does not contain its own source of ignition, and therefore is not within the scope of directive 94/9/EC.

The products can be used in a Group II Category 2 environment assuming that the ATEX Directive and the following conditions are complied with:

- Installation and maintenance of the product must be undertaken by qualified personnel.
- Do not mount the products in an area where impact may occur.
- Filters must be used to limit the introduction of particles and to capture particles generated in service.
- Supply air quality must be within ISO 8573-1:2010 Class 1.4.2.
- Maximum working temperature to be as stated on product label.
- WARNING – pulsating pressure and/or a closed circuit can generate heat.
- Deposits of dust on the product must not exceed 5mm thickness. Refer to technical file for surface areas of plastics. The unit must be earthed via the compressed air supply line.
- The unit must not come into contact with liquid solvents, acids or alkalis. Refer to technical file for chemicals known to be incompatible. Product cleaning must be undertaken using a method complying with the specifications of the ATEX zone, preferably by using mild soap and water or antistatic products.
- Regulators, Filter Regulators: Do not use Regulators or Filter Regulators within systems that can create vibration within the Regulator / Filter Regulator unit.
- Solenoid Operated Valves: Are suitable for use in an ATEX environment, (Group II Category 2) providing ATEX approved solenoids are fitted.
- Technical file available on request.



Global Air Preparation products supplied by Parker Hannifin have been designed and manufactured in accordance with "sound engineering practice", as defined by Article 3 of Pressure Equipment Directive 97/23/EC.



Global Air Preparation product range is in compliance with REACH to ensure continued compliance additions to the list of SVHC (Substance of Very High Concern) are reviewed periodically.



Global Air Preparation product range has been designed and tested in accordance with ISO flow testing, envelope integrity, and catalog data presented.

- Filters – ISO 5782-1 & ISO 5782-2: 1997
- Regulators- ISO 6953-1 & ISO 6953-2: 2000
- Lubricators- ISO 6301-1 & ISO 6301-2: 2009

Global Air Preparation product range has been third party Shock & Vibration tested independently in accordance to EN 61373 : 1999, Category 2



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled "Offer of Sale".

Global Air Preparation System

Introduction	4-13
Combos	
P31 Mini Series	14
P32 Compact Series	15
P33 Standard Series	16
Dimensions	17
Filters	
P31 Mini Series	18-19
P32 Compact Series	20-21
P33 Standard Series	22-23
Coalescing & Adsorber Filters	
P31 Mini Series	24-25
P32 Compact Series	26-27
P33 Standard Series	28-29
Regulators	
P31 Mini Series	30-31
P31 Mini Common Port Regulator	32-33
P32 Compact Series	34-35
P32 Compact Common Port Regulator	36-37
P33 Standard Series	38-39
Filter / Regulators	
P31 Mini Series	40-41
P32 Compact Series	42-42
P33 Standard Series	44-45
Lubricators	
P31 Mini Series	46-47
P32 Compact Series	48-49
P33 Standard Series	50-51
Proportional Regulators	
P31 Mini Series & P32 Compact Series	52-61
Combined Soft Start / Dump Valve	62-63
Dump Valve	64-65
Soft Start Valve	66-67
Solenoid Operators	68-69
Safety Lockout Valve	70
Modular Ball Valves	71
Manifold Blocks	72
Accessories	
P31 Mini Series	73
P32 Compact Series	74
P33 Standard Series	75
Accessories Kits	76-78
Safety Guide	80-81
Offer of Sale	82

Parker Global Air Preparation System

**Global.
Economical.
Modular.**



*Performance you need,
wherever you need it.*



The comprehensive Global Air Preparation System is available in three body sizes with either BSPP, BSPT, or NPT to accommodate thread type requirements.

Full featured filters, regulators, filter/regulators, and lubricators are available with a wide range of standard options to meet air preparation needs.

Individual units can easily be assembled into various combinations, utilizing patented modular lightweight body connectors.

www.parker.com/globalfrl

Comprehensive Offering



P31 Mini Series
1/4" ports
40mm body width



P32 Compact Series
1/4", 3/8" and 1/2"
60mm body width



P33 Standard Series
1/2" and 3/4"
73mm body width



Filters

- 5 μ particulate, 1.0 μ and 0.01 μ coalescing, and adsorber available as standard
- Transparent or metal bowl with manual or auto float drains standard



Regulators

- Available as stand alone, common port and electronic proportional
- Both relieving and non-relieving versions available



Filter / Regulators

- Compact design for space savings
- Available with all the same standard options as the filters and regulators



Lubricators

- Proportional oil delivery over a wide range of air flows
- Fill under pressure



Combinations

- Compact design for space savings
- Easily assembled
- Many configurations available




Accessories







- Solenoid operated soft start, quick dump, and soft start/quick dump valves
- Manifold blocks
- Shut-off valves (both slide and ball type)
- Repair kits, gauges, etc.

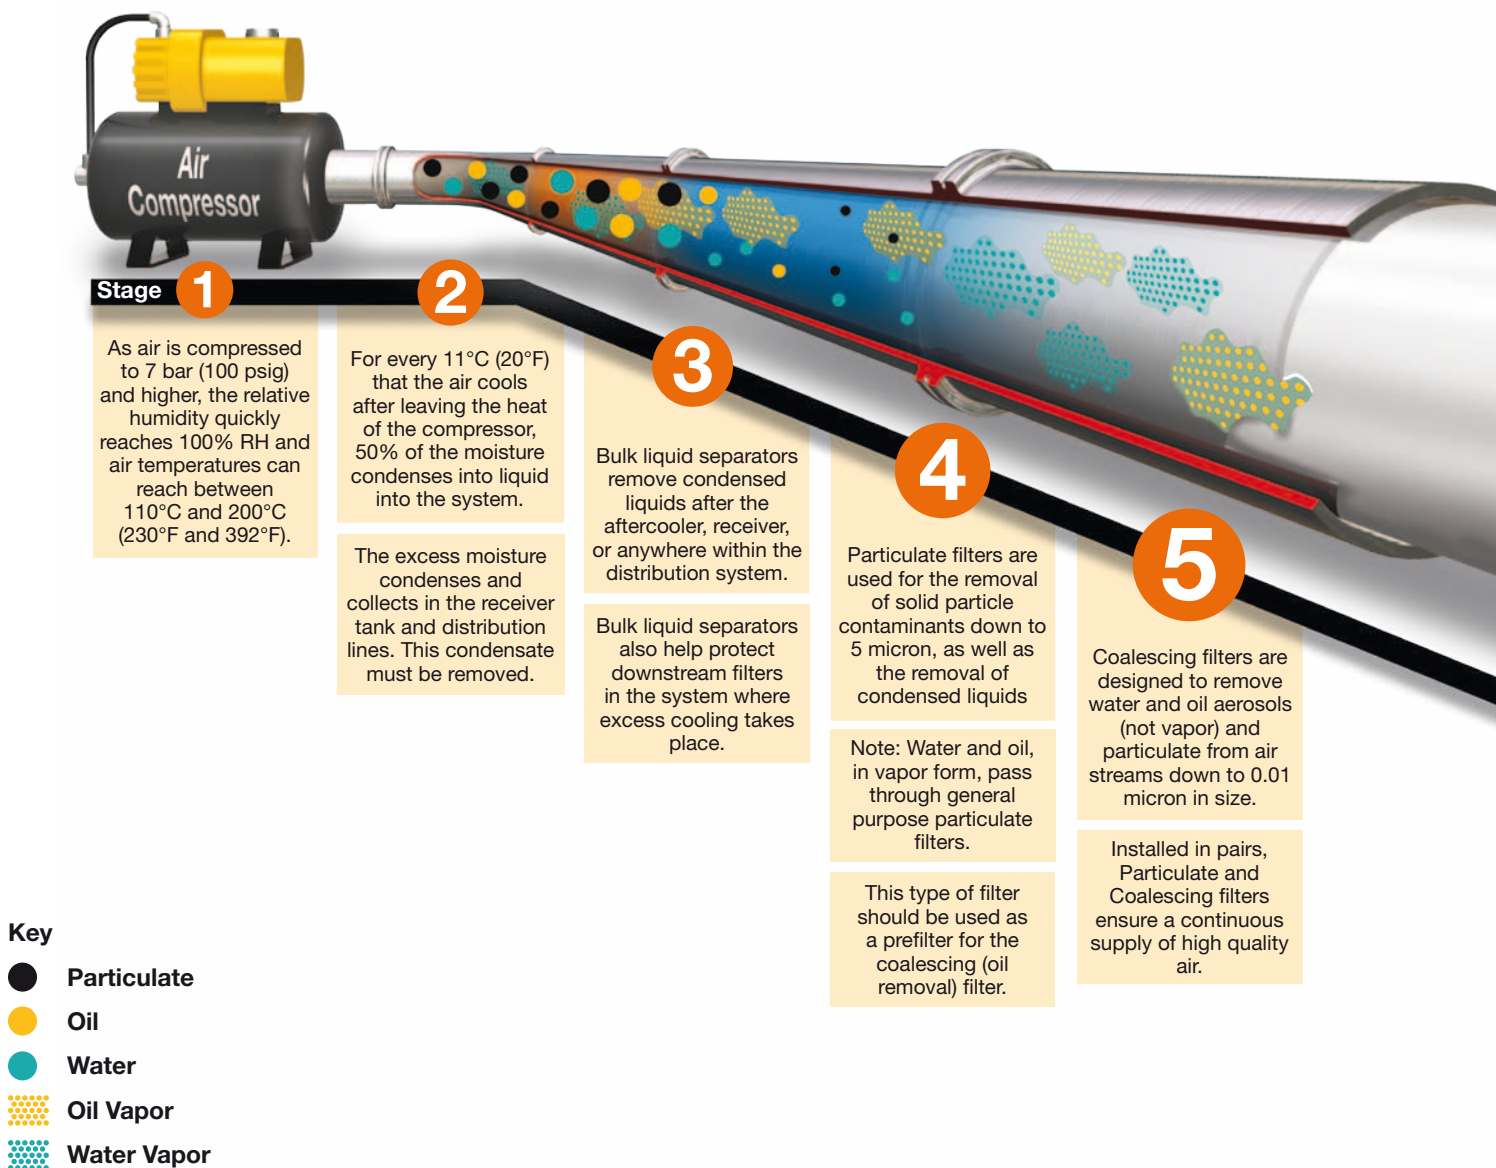Together we can power your application with clean, dry air

Fast cycle times, high product quality, and low downtime all require a clean, dry pneumatic system to function properly. Parker has what it takes to make sure pneumatic systems perform at their best.

Clean, dry pneumatic systems with Parker Global Air Preparation



						
Stages	1 2	3	4	5	6	7
Function	Air Compressor	Bulk Liquid Removal	Particulate Filtration	Coalescing Filtration	Air Dryers	Hydrocarbon Removal
Application	All pneumatic systems	Basic pneumatic systems	Basic pneumatic systems	Systems requiring highest quality air.	Systems requiring air with reduced moisture content	Systems requiring highest quality air for critical applications
Description	Air leaving the compressor room at 93°C (200°F) releases 95% of its moisture into the piping system when it cools to 38°C (100°F)	Removes bulk liquid contamination and protects filters where excess cooling takes place in the distribution piping	Removes solid particulates down to 5 micron, and the separation of bulk contaminants.	Removes liquid aerosols and submicron particulates (not vapor) down to 0.01 micron.	Removes water vapor from air stream. Dew point reduced down to 4°C (40°F) (refrigeration) or -40°C (-40°F) (desiccant).	Removal of odors and trace vapors for critical applications.
Parker Global Air Preparation Solution	Customer supplied	P3TF Bulk Liquid Separator	P31, P32, P33 Particulate Filter	P31, P32, P33 Coalescing Filter	PDRD Refrigeration Dryer P3TJ Regenerative Desiccant Dryer	P31, P32, P33 Activated Carbon (Adsorber) Filter

Clean Dry Air


6

Refrigeration and desiccant dryers lower the air's dew point by removing water vapor, providing appropriately dry air for the downstream application.

7

Hydrocarbon and oil vapors are removed using filters utilizing activated carbon. Airborne hydrocarbons are often left over from the compressor oils.

A completely modular air preparation system

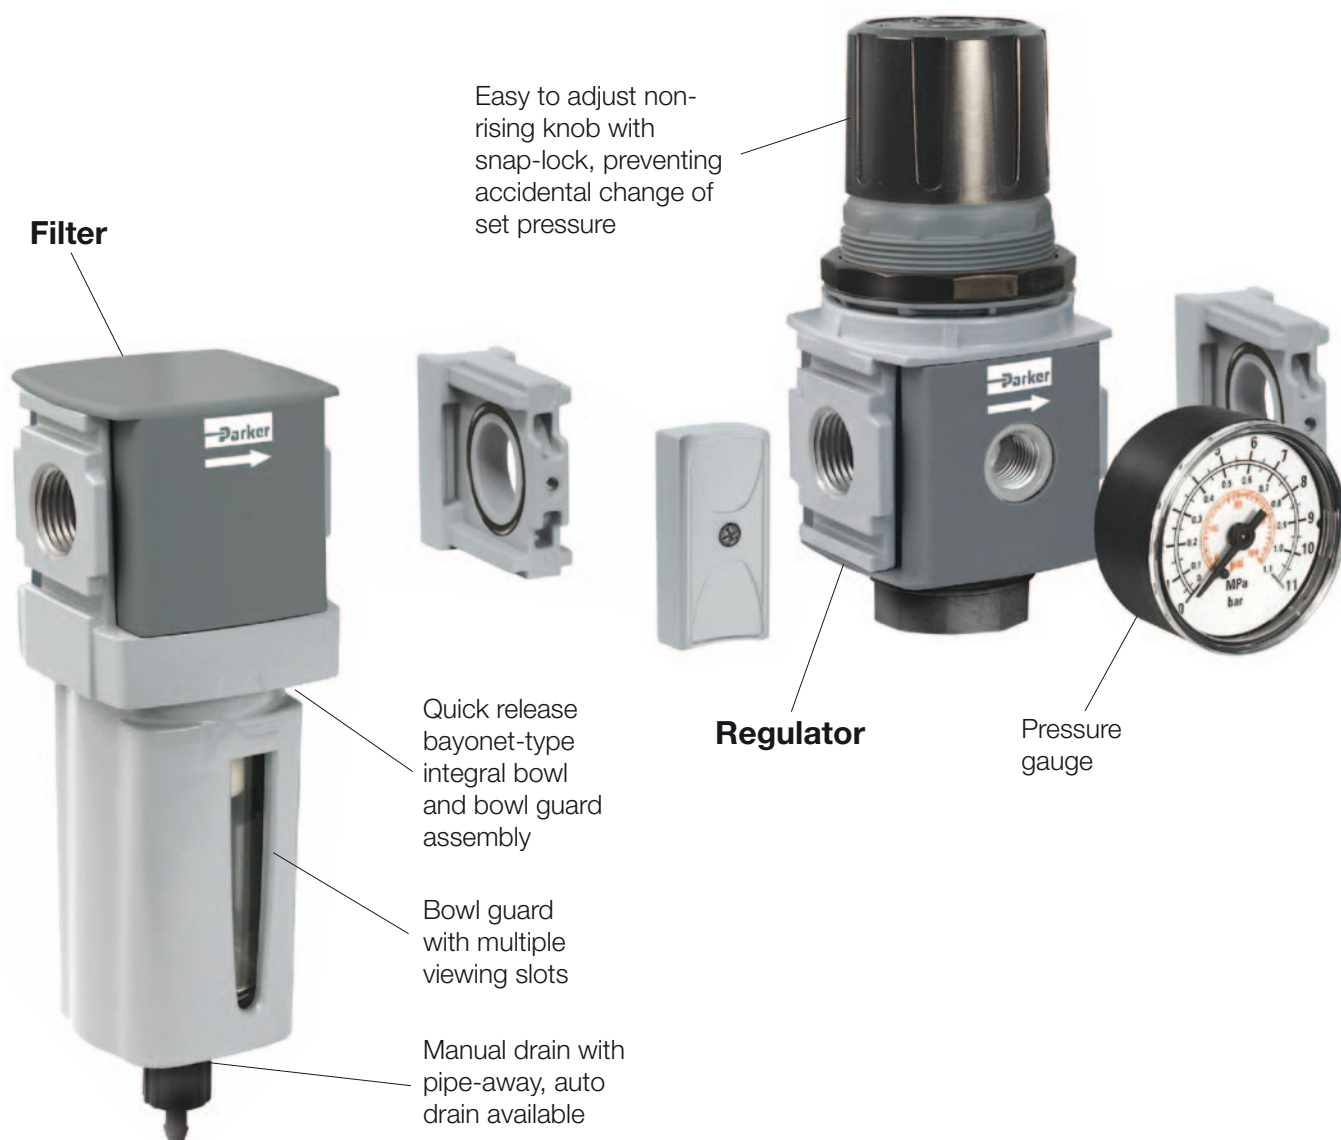

Electronic Proportional Regulator


- Electro-Pneumatic regulator
- Integrated systems control
- Accurate output pressure
- Micro parameter settings
- Selectable I/O parameters
- Quick, full flow exhaust
- LED display indicates output pressure
- No air consumption in steady state
- Multiple mounting options
- Protection to IP65



P31P Mini Series



P32P Compact Series

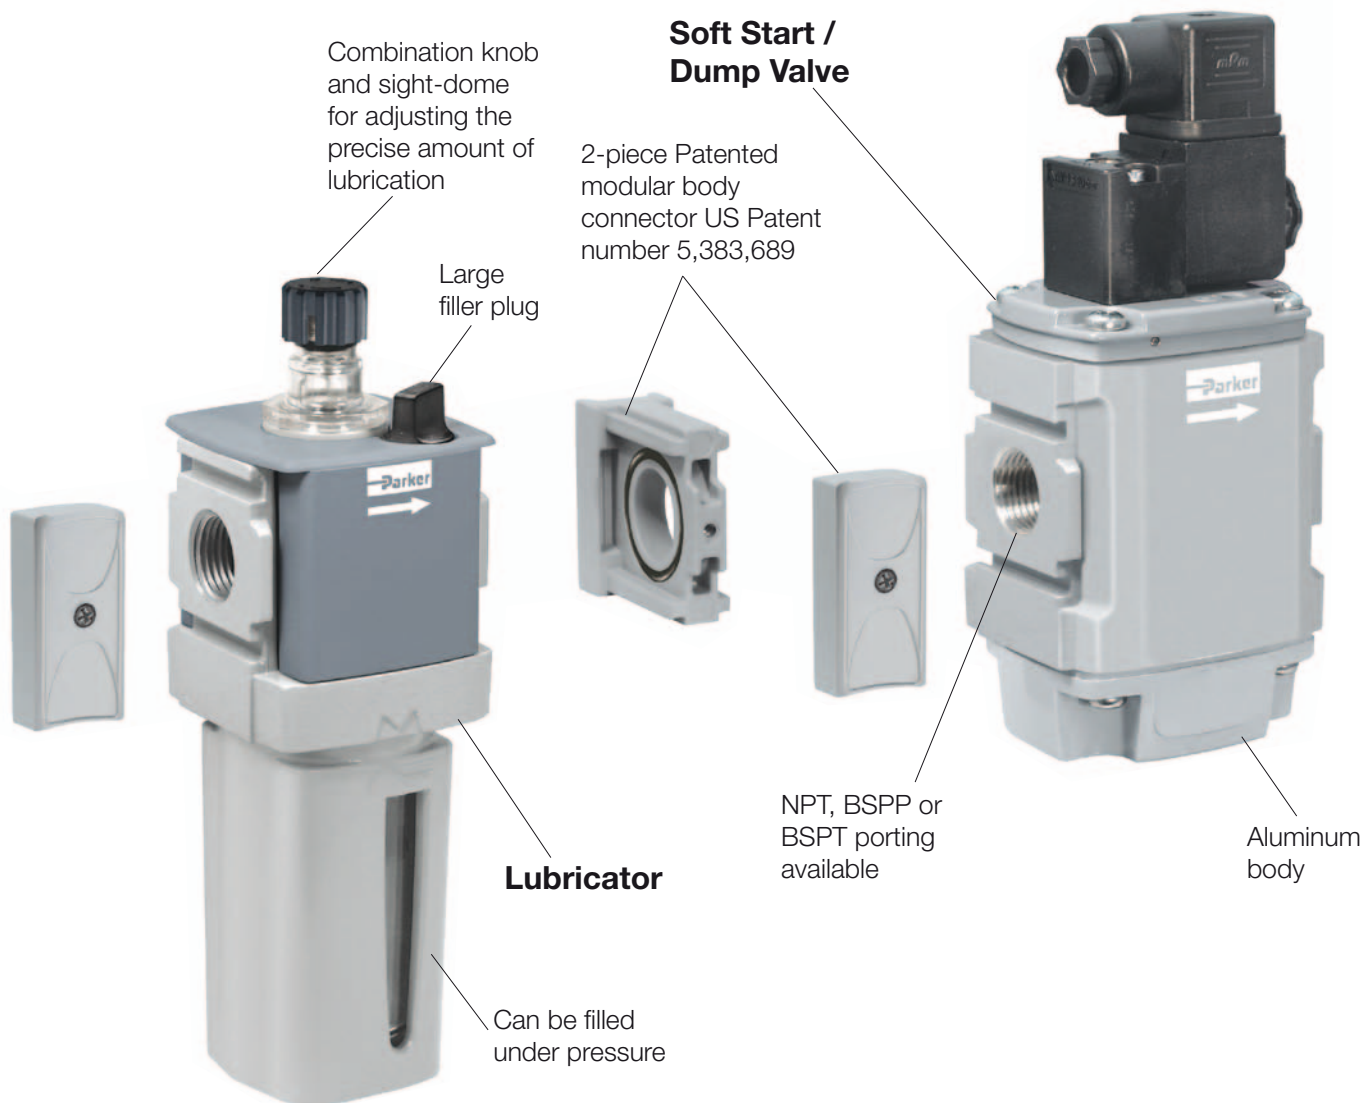

Common Port Manifold Regulators

- Multiple output pressures (P2, P3, P4, etc.) with common inlet (P1)
- Available in two sizes P31 and P32
- Balanced valve design for accurate pressure regulation
- Outlet pressure ports in front and rear of unit.
- Four spring ranges available



Air Preparation

P31 Mini Series

40mm body width

1/4" Ported

Flows up to:	dm ³ /s	(SCFM)
Filter	12	(25)
Coalescer	2	(4.2)
Regulator	30	(64)
Filter/Regulator	14	(30)
Lubricator	13	(28)

Features:

- Space saving integral gauge
- Manifold style regulators available
- OSHA compliant shut-off valves
- Soft-Start & Quick Dump valves
- Electronic Proportional Regulator



P32 Compact Series

60mm body width

1/4", 3/8", & 1/2" Ported

Flows up to:	dm ³ /s	(SCFM)
Filter	38	(80)
Coalescer	11	(23)
Regulator	67	(142)
Filter/Regulator	64	(136)
Lubricator	47	(100)

Features:

- Manifold style regulators available
- OSHA Compliant shut-off valves
- Soft-Start & Quick Dump valves
- Electronic Proportional Regulator



P33 Standard Series

73mm body width

1/2" & 3/4" Ported

Flows up to:	dm ³ /s	(SCFM)
Filter	48	(102)
Coalescer	20	(42)
Regulator	100	(212)
Filter/Regulator	98	(208)
Lubricator	68	(144)

Features:

- OSHA Compliant shut-off valves
- Soft-Start & Quick Dump valves (Utilizes P32 size only)
- Electronic proportional regulator (Utilizes P32 size only)



Valves and Actuators

Mini Series Complimentary Products


The P31 Mini Series FRL's and accessories are well matched for use with these Parker valves and actuators.



Isys Micro



Moduflex Size 1



OSP-P



P1D




P1A

Compact Series Complimentary Products

The P32 Series FRL's & accessories are well matched for use with these Parker valves and actuators.




Isys Micro



Isys HA / HB




P1D



OSP-P

Standard Series Complimentary Products

The P33 Series FRL's & accessories are well matched for use with these Parker valves and actuators.

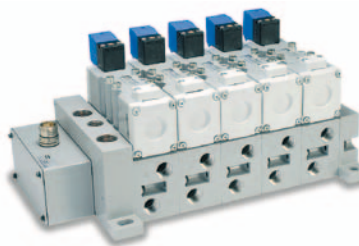


Isys Size 1



Isys HA / HB



P1D

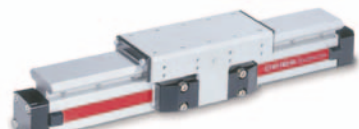




OSP-P

Complete Pneumatic System

















Pressure Regulation

Accurate pressure regulation is important to control forces, speeds, torque, dispensing, processes, etc. Parker has a global solution to all of your pressure regulation needs, with support around the world.

			
Function	Single	Common Port Manifold	Electronic Proportional
Description	For pneumatic systems requiring single pressure regulation.	For pneumatic systems requiring multiple pressures for different parts of the system, yet still having a common inlet supply.	For pneumatic systems requiring an electronic to pneumatic proportional control signal. Also allows pressure regulation to be integrated into your control systems.
Parker Global Air Preparation Solution	P31R, P32R, P33R	P31H, P32H	P31P, P32P fits Compact & Standard




Accessories

Today's sophisticated pneumatic systems need more than just FRL's. Often times peripheral accessory products are needed to complete your pneumatic system. Parker has what is needed to ensure safe and reliable start-ups, shut-downs, and lockouts, etc.




						
Function	Ball Valve	Slide Valve	Soft Start / Quick Dump	Soft Start	Quick Dump	Manifold Block
Soft Start Function						
Quick Dump Function	Slow Exhaust	Slow Exhaust				
Operation	Manual Twist	Manual Slide	Solenoid or Air Pilot	Solenoid, Air Pilot, or Internal Air Pilot	Solenoid or Air Pilot	N/A
Placement	Before or after FRL or stand alone	Before or after FRL or stand alone	After FRL	After FRL	After FRL	Anywhere within FRL or stand alone
Parker Global Air Preparation Solution	P31V, P32V, P33V	P31V, P32V, P33V	P31T Mini, P32T fits Compact & Standard	P31S Mini, P32S fits Compact & Standard	P31D Mini, P32D fits Compact & Standard	P31M Mini, P33M fits Compact & Standard

Application Guide

FRL to Valve: The chart below contains recommendations for the correct selection of Global Air Preparation units to suit the number and size of valves in a typical application.

	P31 Mini Series					P32 Compact Series						P33 Standard Series					
																	
	Number of valves that would actuate at once																
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
Moduflex 1																	
Isys Micro																	
HB / Viking Xtreme																	
Moduflex 2																	
HA / Global ISO																	
See Larger Parker FRL Offering																	

Actuator to FRL: The chart below contains recommendations for the correct selection of Global Air Preparation units suitable for each cylinder size. If you have a tube length over 2 m, choose one tube size larger than the chart. The table is based on a Maximum cylinder speed of 0.5m/s


Cyl Ø mm Cyl Ø inches		Cylinder bore size													
		5 (5/16)	10 (7/16)	16 (9/16)	20 (3/4)	25 (1)	28 (1-1/8)	32 (1-1/4)	40 (1-1/2)	45 (1-3/4)	50 (2)	63 (2-1/2)	75 (3)	80 (3-1/4)	100 (4)
Tube Ø mm Tube Ø inches		Tube diameter external													
		4 (5/32)	4 (5/32)	4 (5/32)	6 (1/4)	6 (1/4)	6 (1/4)	6 (1/4)	8 (5/16)	8 (5/16)	8 (5/16)	10 (3/8)	10 (3/8)	12 (1/2)	12 (1/2)
Number of cylinders actuating at once	1														
	2														
	3														
	4														
	5														
	6														
	7														
	8														
	9														
	10														
		P31 Mini Series 					P32 Compact Series 				P33 Standard Series 			See Larger Parker FRL Offering	

Note: Data listed above is simply a guideline for a typical application only. Proper sizing and correct flow requirements must be taken into account.

Popular Combinations




Filter + Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Pulse Drain	Weight
1/4"	13 27	P31CB92GEMN5LNW	0.46 kg (1.01 lbs)	P31CB92GEBN5LNW	0.46 kg (1.01 lbs)



Filter/Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Pulse Drain	Weight
1/4"	14 28	P31CA92GEMN5LNW	0.35 kg (0.77 lbs)	P31CA92GEBN5LNW	0.35 kg (0.77 lbs)

Filter / Regulator coding (use with codes: A M)		Filter coding (use with combo codes: B F G). For multiple filters, repeat as needed		Regulator coding (use with combo code: B)		Lubricator coding (use with combo codes: A B)		Assembly configuration	
P 3 1		Combination B/V + Combination Q Combination + B/V X Combination C Shut off + Combination Y Combination + Shut off Z		Thread type BSPP 1 BSPT 2 NPT 9		Port size 1/4 2		Combination type* F/R+L A F+Fc+Fa G F+R+L B F/R+Fc M F+Fc F F+Fc1+Fc Q	
Element 5µ Element E 0.01µ Element C 1µ Element 9 Adsorber A		Relief / Adjustment Non-rising knob N		Adjustment range With square gauge psig bar 30* = 1 2* = V 60 = 3 4 = S 125 = 5 8 = T Without gauge† psig bar 30 = Y 2 = Y 60 = L 4 = L 125 = N 8 = N		Lub type Oil mist standard sight dome L		Drain type No drain; closed end N	
Drain type Manual drain M Pulse drain B		Bowl type Poly bowl with bowl guard G Metal bowl without sight gauge M		Mounting No bracket A Port blocks C* Port blocks & wall brkt D* Wall bracket W		* For 3/8" Port Blocks please order separately. See Kits section.			

* Combination type
F = 5µ
Fc1 = 1µ
Fc = .01µ
Fa = Adsorber

Note: All bowl types are the same for each component

Example: If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.


* Unit comes with 0-4 bar or 0-60 psig gauge respectively.
† Order round gauges separately - see page 31.

Global Air Preparation System

Popular Combinations




Filter + Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Auto Drain	Weight
1/4"	20 42	P32CB92GEMNGLNW	1.29 kg (2.84 lbs)	P32CB92GEANGLNW	1.29 kg (2.84 lbs)
3/8"	32 68	P32CB93GEMNGLNW	1.29 kg (2.84 lbs)	P32CB93GEANGLNW	1.29 kg (2.84 lbs)
1/2"	40 85	P32CB94GEMNGLNW	1.29 kg (2.84 lbs)	P32CB94GEANGLNW	1.29 kg (2.84 lbs)



Filter/Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Auto Drain	Weight
1/4"	22 45	P32CA92GEMNGLNW	1.03 kg (2.27 lbs)	P32CA92GEANGLNW	1.03 kg (2.27 lbs)
3/8"	33 70	P32CA93GEMNGLNW	1.03 kg (2.27 lbs)	P32CA93GEANGLNW	1.03 kg (2.27 lbs)
1/2"	43 90	P32CA94GEMNGLNW	1.03 kg (2.27 lbs)	P32CA94GEANGLNW	1.03 kg (2.27 lbs)

Filter / Regulator coding
 (use with codes: A M)

Filter coding
 (use with combo codes:
 B F G). For multiple filters,
 repeat as needed

Regulator coding
 (use with combo code: B)

Lubricator coding
 (use with combo
 codes: A B)

**Assembly
 configuration**

P 3 2		Combination B/V + Combination Q Combination + B/V X Combination C Shut off + Combination Y Combination + Shut off Z		Thread type BSPP 1 BSPT 2 NPT 9		Port size 1/4 2 3/8 3 1/2 4		Combination type* F/R+L A F+Fc+Fa G F+R+L B F/R+Fc M F+Fc F F+Fc1+Fc Q		Bowl type Poly bowl with bowl guard G Metal bowl without sight gauge M Metal bowl with sight gauge S		Element 0.01µ Element C 0.01µ Element with dpi D* 5µ Element E 5µ Element with dpi F* 1µ Element 9 1µ Element with dpi Q* Adsorber A		Relief / Adjustment Non-rising knob relieving N		Adjustment range With round gauge 2 bar; 30 psig; 0.2 MPa Z 4 bar; 60 psig; 0.4 MPa M 8 bar; 125 psig; 0.8 MPa G 17 bar; 250 psig; 1.7 MPa J* Without gauge 2 bar; 30 psig; 0.2 MPa Y 4 bar; 60 psig; 0.4 MPa L 8 bar; 125 psig; 0.8 MPa N 17 bar; 250 psig; 1.7 MPa H*		Lub type Oil mist standard sight dome L		Drain type No drain; closed end N		Mounting No bracket A Port blocks C Port blocks & wall brkt D Wall bracket W	
--------------	--	--	--	--	--	--	--	--	--	---	--	---	--	--	--	--	--	--	--	--	--	---	--

* Combination type
 F = 5µ
 Fc1 = 1µ
 Fc = .01µ
 Fa = Adsorber

* Not available when using lubricator.
Note: All bowl types are the same for each component.
Example: If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.


* Not available with F/R.

Global Air Preparation System

Popular Combinations




Filter + Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Auto Drain	Weight
1/2"	43 90	P33CB94GEMNGLNW	1.84 kg (4.06 lbs)	P33CB94GEANGLNW	1.84 kg (4.06 lbs)
3/4"	52 110	P33CB96GEMNGLNW	1.84 kg (4.06 lbs)	P33CB96GEANGLNW	1.84 kg (4.06 lbs)



Filter/Regulator + Lubricator Combinations + Poly bowl
5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets
Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),
1 bar (14.5 psig) pressure drop.



Port size	Flow dm ³ /s (scfm)	Manual Drain	Weight	Auto Drain	Weight
1/2"	52 110	P33CA94GEMNGLNW	1.51 kg (3.33 lbs)	P33CA94GEANGLNW	1.51 kg (3.33 lbs)
3/4"	71 150	P33CA96GEMNGLNW	1.51 kg (3.33 lbs)	P33CA96GEANGLNW	1.51 kg (3.33 lbs)

Filter / Regulator coding (use with codes: A M)		Filter coding (use with combo codes: B F G). For multiple filters, repeat as needed	Regulator coding (use with combo code: B)	Lubricator coding (use with combo codes: A B)	Assembly configuration																																																
<div> <div> P 3 3 </div> <div> <table border="1"> <tr><td colspan="2">Combination</td></tr> <tr><td>B/V + Combination</td><td>Q</td></tr> <tr><td>Combination + B/V</td><td>X</td></tr> <tr><td>Combination</td><td>C</td></tr> <tr><td>Shut off + Combination</td><td>Y</td></tr> <tr><td>Combination + Shut off</td><td>Z</td></tr> </table> </div> <div> <table border="1"> <tr><td colspan="2">Thread type</td></tr> <tr><td>BSPP</td><td>1</td></tr> <tr><td>BSPT</td><td>2</td></tr> <tr><td>NPT</td><td>9</td></tr> </table> </div> <div> <table border="1"> <tr><td colspan="2">Port size</td></tr> <tr><td>1/2</td><td>4</td></tr> <tr><td>3/4</td><td>6</td></tr> </table> </div> <div> <table border="1"> <tr><td colspan="2">Combination type*</td></tr> <tr><td>F/R+L</td><td>A</td></tr> <tr><td>F+R+L</td><td>B</td></tr> <tr><td>F+Fc</td><td>F</td></tr> <tr><td>F+Fc+Fa</td><td>G</td></tr> <tr><td>F/R+Fc</td><td>M</td></tr> <tr><td>F+Fc+Fa</td><td>Q</td></tr> </table> </div> <div> <table border="1"> <tr><td colspan="2">Bowl type</td></tr> <tr><td>Poly bowl with bowl guard</td><td>G</td></tr> <tr><td>Metal bowl without sight gauge</td><td>M*</td></tr> <tr><td>Metal bowl with sight gauge</td><td>S</td></tr> </table> </div> <div> <p>* Not available when using lubricator. Note: All bowl types are the same for each component. Example: If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.</p> </div> </div>						Combination		B/V + Combination	Q	Combination + B/V	X	Combination	C	Shut off + Combination	Y	Combination + Shut off	Z	Thread type		BSPP	1	BSPT	2	NPT	9	Port size		1/2	4	3/4	6	Combination type*		F/R+L	A	F+R+L	B	F+Fc	F	F+Fc+Fa	G	F/R+Fc	M	F+Fc+Fa	Q	Bowl type		Poly bowl with bowl guard	G	Metal bowl without sight gauge	M*	Metal bowl with sight gauge	S
Combination																																																					
B/V + Combination	Q																																																				
Combination + B/V	X																																																				
Combination	C																																																				
Shut off + Combination	Y																																																				
Combination + Shut off	Z																																																				
Thread type																																																					
BSPP	1																																																				
BSPT	2																																																				
NPT	9																																																				
Port size																																																					
1/2	4																																																				
3/4	6																																																				
Combination type*																																																					
F/R+L	A																																																				
F+R+L	B																																																				
F+Fc	F																																																				
F+Fc+Fa	G																																																				
F/R+Fc	M																																																				
F+Fc+Fa	Q																																																				
Bowl type																																																					
Poly bowl with bowl guard	G																																																				
Metal bowl without sight gauge	M*																																																				
Metal bowl with sight gauge	S																																																				

Element	
0.01µ Element	C
0.01µ Element with dpi	D*
5µ Element	E
5µ Element with dpi	F*
1µ Element	9
1µ Element with dpi	Q*
Adsorber	A

Drain type	
Auto drain	A
Manual drain	M

Relief / Adjustment	
Non-rising knob relieving	N

Adjustment range	
With round gauge	
2 bar; 30 psig; 0.2 MPa	Z
4 bar; 60 psig; 0.4 MPa	M
8 bar; 125 psig; 0.8 MPa	G
17 bar; 250 psig; 1.7 MPa	J*
Without gauge	
2 bar; 30 psig; 0.2 MPa	Y
4 bar; 60 psig; 0.4 MPa	L
8 bar; 125 psig; 0.8 MPa	N
17 bar; 250 psig; 1.7 MPa	H*


Lub type	
Oil mist standard sight dome	L

Drain type	
No drain; closed end	N


Mounting	
No bracket	A
Port blocks	C
Port blocks & wall brkt	D
Wall bracket	W

Popular Combination Dimensions mm (inches)


P31C

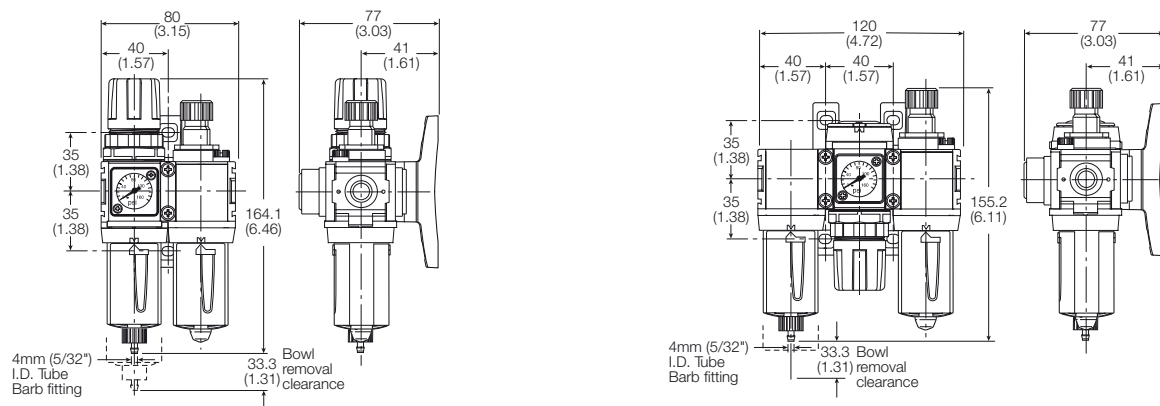


P32C

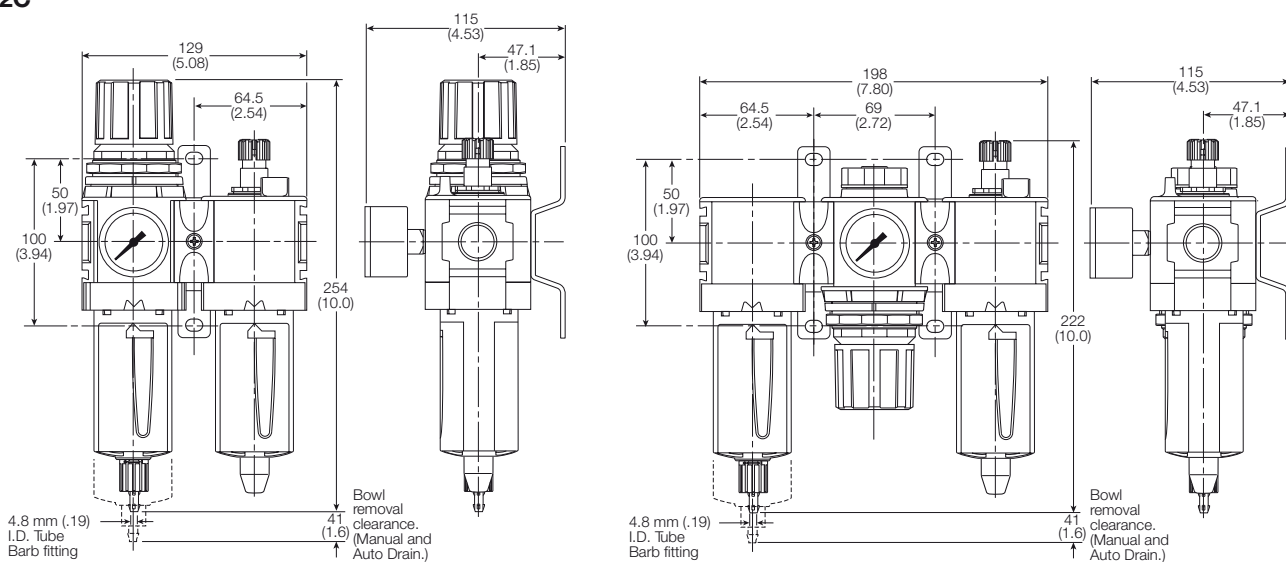


P33C

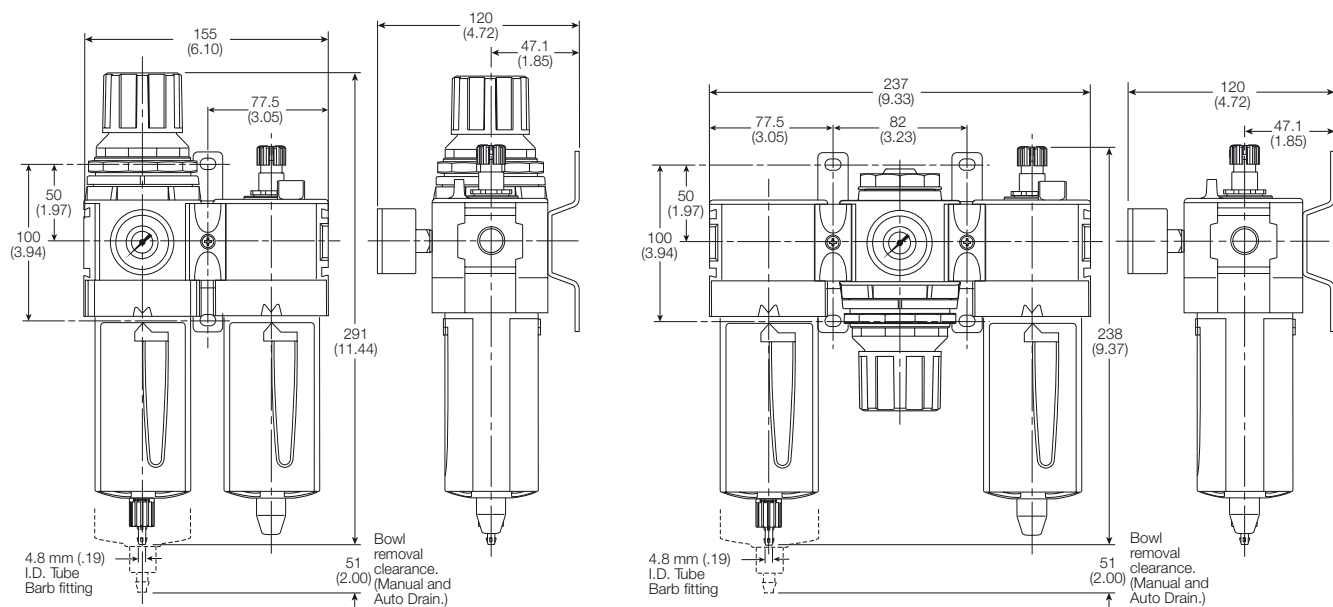

Global Air Preparation System**Mini Particulate Filter - P31****Symbols**

Manual drain



Auto drain

- Integral 1/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- One hand operation for easy element cartridge removal
- Positive bayonet latch to ensure correct & safe fitting

Options:

P 3 1 F	A			E			N
Engr. level	Thread type	Port size	Bowl type		Drain type		Mounting
Current A	BSPP 1 BSPT 2 NPT 9	1/4 2	Poly bowl with bowl guard G Metal bowl without sight gauge M		Pulse drain B Manual drain M		No bracket N
			Element				
			5μ Element E				

Port size	Description	Order Code†	Flow‡ dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - Manual drain	P31FA92EGMN	12 (25)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Poly bowl - Pulse drain	P31FA92EGBN	12 (25)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - Manual drain	P31FA92EMMN	12 (25)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - Pulse drain	P31FA92EMBN	12 (25)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/4	12 dm ³ /s (25 scfm)
Operating Temperature	Plastic Bowl -10°C to 52°C (14°F to 125°F) Metal Bowl -10°C to 65.5°C (14°F to 150°F)	
Max. Supply Pressure	Plastic Bowl 10 bar (150 psig) Metal Bowl 17 bar (250 psig)	
Standard Filtration	5 Micron	
Useful Retention†	12 cm ³ (0.4 US oz.)	
Port Size	BSPP / BSPT / NPT	1/4
Weight	0.11 kg (0.24 lbs)	

* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

† Useful retention refers to volume below the quiet zone baffle.

Air quality:

Within ISO 8573-1: 1991 Class 3 (Particulates)


Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction


Body	Aluminum
Body Cap	ABS
Bowl	Polycarbonate
Bowl Guard	Nylon
Element Retainer	Acetal
Baffle	Acetal
Filter Element	Sintered Polyethylene
Seals	Nitrile

Flow Charts

1/4 Filter

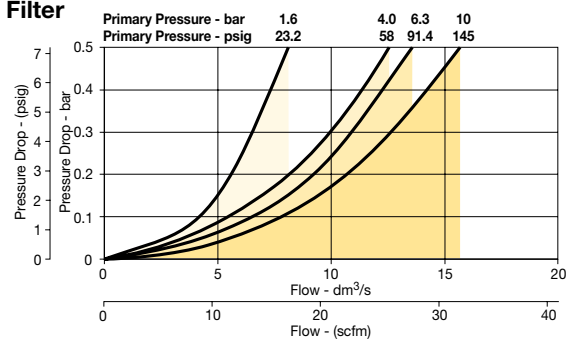


Dimensions mm (inches)

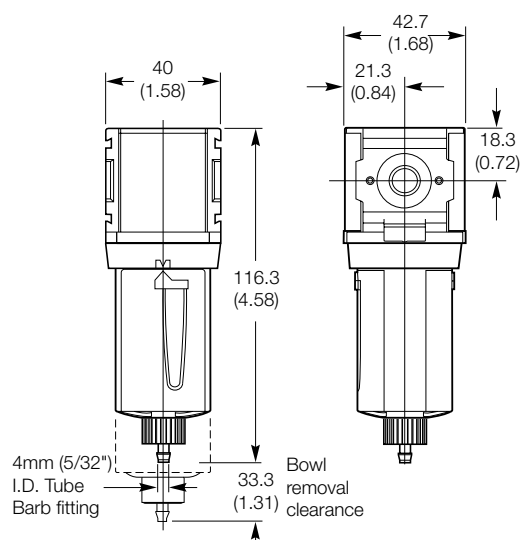


Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P31KA00BGM
Metal bowl / w/o sight gauge manual drain	P31KA00BMM
Plastic bowl / Bowl guard pulse drain	P31KA00BGB
Metal bowl / w/o sight gauge pulse drain	P31KA00BMB
5μ particle filter element	P31KA00ESE
C-Bracket (fits to body)	P31KA00MW
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB


Global Air Preparation System**Compact Particulate Filter - P32****Symbols**

Manual drain



Auto drain

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting

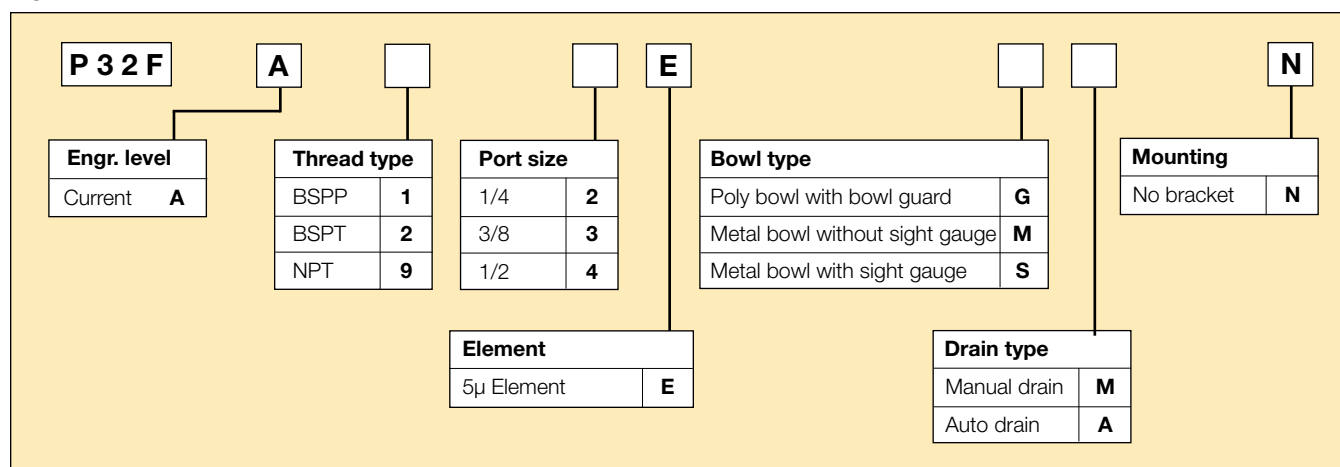Options:

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - Manual drain	P32FA92EGMN	18 (38)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
1/4"	Poly bowl - Auto drain	P32FA92EGAN	18 (38)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - Manual drain	P32FA92ESMN	18 (38)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - Auto drain	P32FA92ESAN	18 (38)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - Manual drain	P32FA93EGMN	30 (64)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - Auto drain	P32FA93EGAN	30 (64)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - Manual drain	P32FA93ESMN	30 (64)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - Auto drain	P32FA93ESAN	30 (64)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - Manual drain	P32FA94EGMN	38 (80)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - Auto drain	P32FA94EGAN	38 (80)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - Manual drain	P32FA94ESMN	38 (80)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - Auto drain	P32FA94ESAN	38 (80)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/4	18 dm ³ /s (38 scfm)
	3/8	30 dm ³ /s (64 scfm)
	1/2	38 dm ³ /s (80 scfm)
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Standard Filtration	5 Micron	
Useful Retention†	51 cm ³ (1.7 US oz.)	
Port Size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Weight	0.28 kg (0.62 lbs)	

* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

† Useful retention refers to volume below the quiet zone baffle.

Air quality:


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Bowl Guard	Nylon	
Deflector	Polypropylene	
Element Retainer / Baffle	Acetal	
Filter Element	Sintered Polyethylene	
Seals	Nitrile	
Sight Gauge	Metal Bowl	Polycarbonate

Dimensions mm (inches)

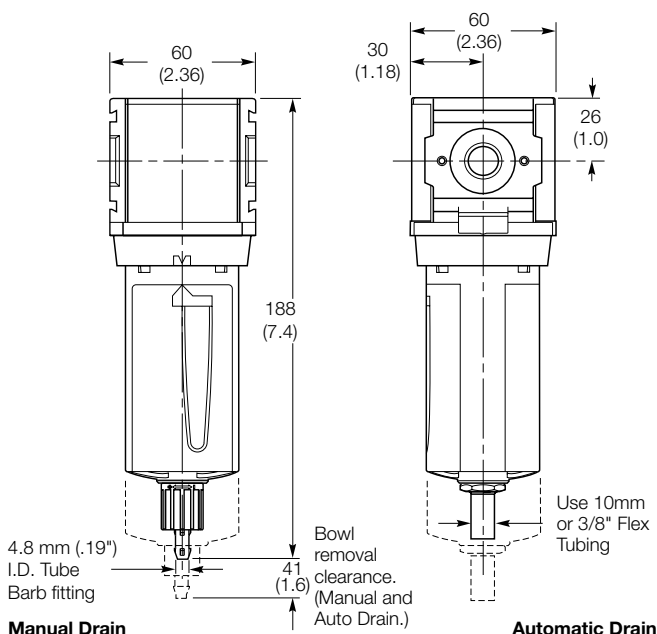


Flow Charts


1/4 Filter

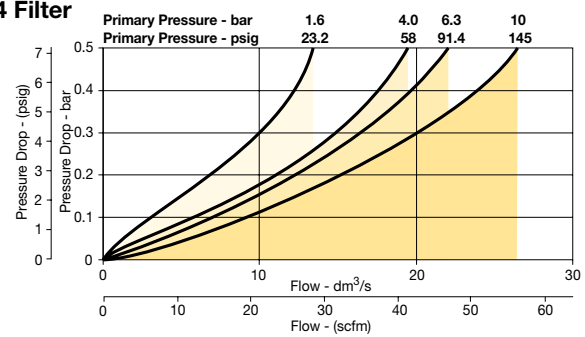

3/8 Filter

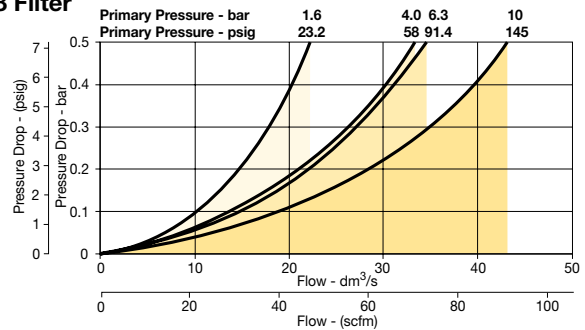


1/2 Filter

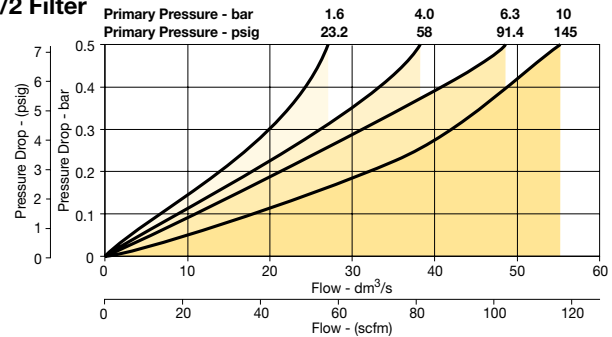


Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P32KA00BGM
Metal bowl / Sight gauge manual drain	P32KA00BSM
Auto drain	P32KA00DA
5μ particle filter element	P32KA00ESE
L-Bracket (fits to body)	P32KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB
Differential pressure indicator (replacement)	P32KA00RQ

Global Air Preparation System**Standard Particulate Filter - P33****Symbols**

Manual drain



Auto drain

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting

Options:

P 33 F	A			E			N
Engr. level	Thread type	Port size	Bowl type	Element	Drain type	Mounting	
Current A	BSPP 1	1/2 4	Poly bowl with bowl guard G	5μ Element E	Manual drain M	No bracket N	
	BSPT 2	3/4 6	Metal bowl without sight gauge M		Auto drain A		
	NPT 9		Metal bowl with sight gauge S				

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - Manual drain	P33FA94EGMN	40 (85)	10 (150)	213 (8.4)	73 (2.9)	73 (2.9)
1/2"	Poly bowl - Auto drain	P33FA94EGAN	40 (85)	10 (150)	207 (8.2)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - Manual drain	P33FA94ESMN	40 (85)	17 (250)	213 (8.4)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - Auto drain	P33FA94ESAN	40 (85)	17 (250)	207 (8.2)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - Manual drain	P33FA96EGMN	48 (102)	10 (150)	213 (8.4)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - Auto drain	P33FA96EGAN	48 (102)	10 (150)	207 (8.2)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - Manual drain	P33FA96ESMN	48 (102)	17 (250)	213 (8.4)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - Auto drain	P33FA96ESAN	48 (102)	17 (250)	207 (8.2)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/2	40 dm ³ /s (85 scfm)
	3/4	48 dm ³ /s (102 scfm)
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Standard Filtration	5 Micron	
Useful Retention†	85 cm ³ (2.8 US oz.)	
Port Size	BSPP / BSPT / NPT 1/2, 3/4	
Weight	0.46 kg (1.01 lbs)	

* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

† Useful retention refers to volume below the quiet zone baffle.

Air quality:

Within ISO 8573-1: 1991 Class 3 (Particulates)


Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Bowl Guard	Nylon	
Deflector	Polypropylene	
Element Retainer / Baffle	Acetal	
Filter Element	Sintered Polyethylene	
Seals	Nitrile	
Sight Gauge	Metal Bowl	Polycarbonate

Flow Charts


1/2 Filter

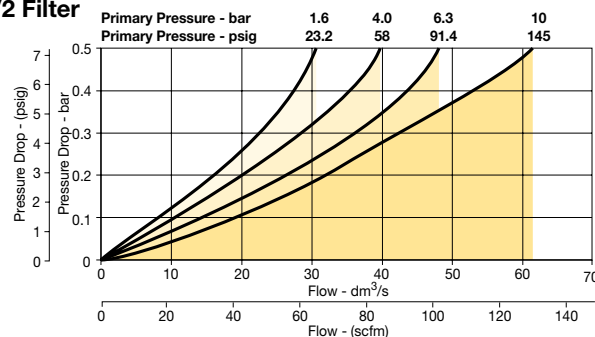

3/4 Filter

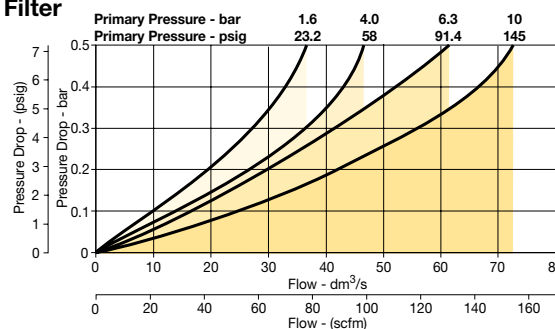

Dimensions mm (inches)

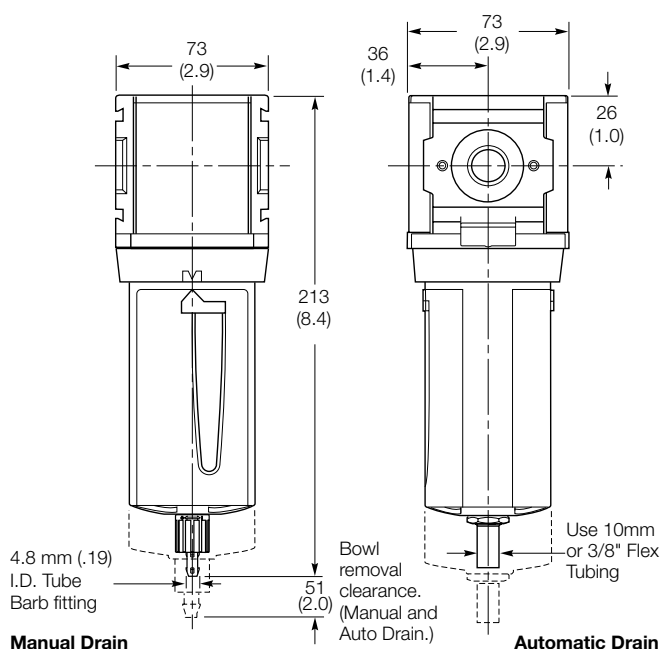

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P33KA00BGM
Metal bowl / Sight gauge manual drain	P33KA00BSM
Auto drain	P32KA00DA
5μ particle filter element	P33KA00ESE
L-Bracket (fits to body)	P33KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P33KA00MT
Body connector	P32KA00CB
Differential pressure indicator (replacement)	P32KA00RQ

Global Air Preparation System**Mini Coalescing and Adsorber Filters - P31**

- Integral 1/4" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

Note: To optimize the life of coalescing element, it is advisable to install a P31F pre-filter with a 5 micron element upstream of the coalescing filter.

To optimize the life of an Adsorber it is advisable to install a P31 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

Options:

P 3 1 F	A						N
Engr. level	Thread type	Port size	Bowl type		Drain type		Mounting
Current A	BSPP 1 BSPT 2 NPT 9	1/4 2	Poly bowl with bowl guard G Metal bowl without sight gauge M		Pulse drain B Manual drain M		No bracket N
		Element					
		0.01µ Element C 1µ Element 9 Adsorber A					

Port size	Description	Order Code†	Flow‡ dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - 0.01 micron - Manual drain	P31FA92CGMN	2 (4.2)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Poly bowl - 0.01 micron - Pulse drain	P31FA92CGBN	2 (4.2)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - 0.01 micron - Manual drain	P31FA92CMMN	2 (4.2)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - 0.01 micron - Pulse drain	P31FA92CMBN	2 (4.2)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity		dm ³ /s	SCFM
1.0 Micron Coalescing	Energy Efficient Flow*	3.8	(8)
	Maximum Flow**	6	(13)
0.01 Micron Coalescing	Energy Efficient Flow*	2	(4.2)
	Maximum Flow**	3.8	(8)
Activated Carbon Adsorber	Rated Flow*	6	(13)
Operating Temperature	Plastic Bowl	-10°C to 52°C (14°F to 125°F)	
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)	
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)	
	Metal Bowl	17 bar (250 psig)	
Standard Filtration		1.0 and 0.01 Micron	
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)	
Useful Retention†		12 cm ³ (0.4 US oz.)	
Port Size	BSPP / BSPT / NPT	1/4	
Weight		0.11 kg (0.24 lbs)	

* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.


** Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.

† Useful retention refers to volume below the quiet zone baffle.

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowl	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Filter Element	1.0 and .01 Micron	Borosilicate Cloth
Adsorber	Activated Carbon	
Seals	Nitrile	

Dimensions mm (inches)

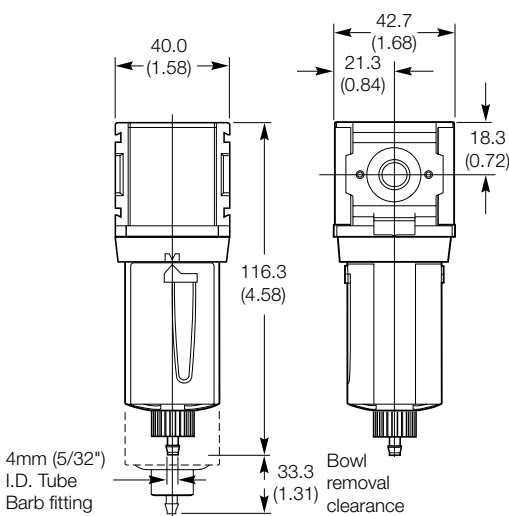


Flow Charts

P31 - 1.0 micron flow

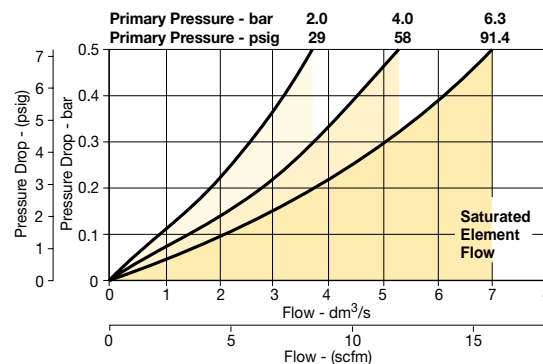

P31 - 0.01 micron flow

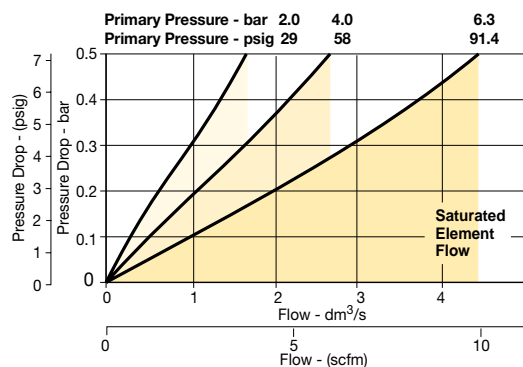

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P31KA00BGM
Metal bowl / w/o sight gauge manual drain	P31KA00BMM
Plastic bowl / Bowl guard pulse drain	P31KA00BGB
Metal bowl / w/o sight gauge pulse drain	P31KA00BMB
1μ coalescing filter element	P31KA00ES9
0.01μ coalescing filter element	P31KA00ESC
Activated carbon adsorber filter element	P31KA00ESA
C-Bracket (fits to body)	P31KA00MW
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB

Global Air Preparation System**Compact Coalescing and Adsorber Filter - P32**

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Differential Pressure Indicator (DPI) standard on Coalescing Filters
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

Note: To optimize the life of coalescing element, it is advisable to install a P32F pre-filter with a 5 micron element upstream of the coalescing filter.

To optimize the life of an Adsorber it is advisable to install a P32 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

Options:

P 3 2 F	A						N
Engr. level	Thread type	Port size	Bowl type	Mounting	Element	Drain type	
Current A	BSPP 1	1/4 2	Poly bowl with bowl guard G	No bracket N	0.01µ Element C	Manual drain M	
	BSPT 2	3/8 3	Metal bowl without sight gauge M		0.01µ Element with dpi D	Auto drain A	
	NPT 9	1/2 4	Metal bowl with sight gauge S		1µ Element 9		
					1µ Element with dpi Q		
					Adsorber A		

Port size	Description	Order Code†	Flow‡ dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - 0.01 Micron, Manual drain	P32FA92DGMN	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
1/4"	Poly bowl - 0.01 Micron, Auto drain	P32FA92DGAN	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - 0.01 Micron, Manual drain	P32FA92DSMN	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - 0.01 Micron, Auto drain	P32FA92DSAN	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - 0.01 Micron, Manual drain	P32FA93DGMN	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - 0.01 Micron, Auto drain	P32FA93DGAN	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - 0.01 Micron, Manual drain	P32FA93DSMN	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - 0.01 Micron, Auto drain	P32FA93DSAN	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - 0.01 Micron, Manual drain	P32FA94DGMN	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - 0.01 Micron, Auto drain	P32FA94DGAN	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - 0.01 Micron, Manual drain	P32FA94DSMN	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - 0.01 Micron, Auto drain	P32FA94DSAN	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity			dm ³ /s	SCFM
1.0 Micron Coalescing	Energy Efficient Flow*	17	(36)	
	Maximum Flow**	27	(57)	
0.01 Micron Coalescing	Energy Efficient Flow*	11	(23)	
	Maximum Flow**	28	(38)	
Activated Carbon Adsorber	Rated Flow*	27	(57)	
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)		
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)		
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)		
	Metal Bowl	17 bar (250 psig)		
Standard Filtration		1.0 and 0.01 Micron		
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)		
Useful Retention†		51 cm ³ (1.7 US oz.)		
Port Size		BSPP / BSPT / NPT	1/4, 3/8, 1/2	
Weight		0.32 kg (0.71 lbs)		

* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.

** Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.


† Useful retention refers to volume below the quiet zone baffle.

Dimensions mm (inches)

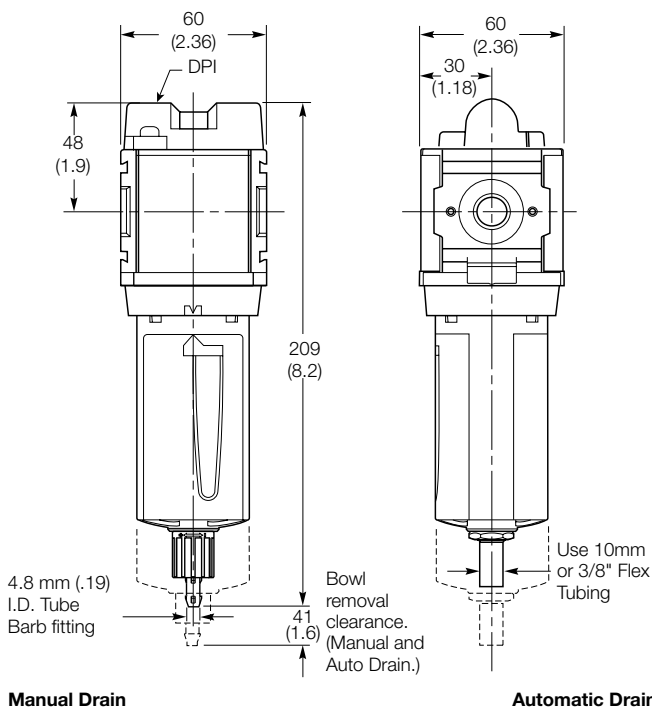


Flow Charts

P32 - 1.0 micron flow

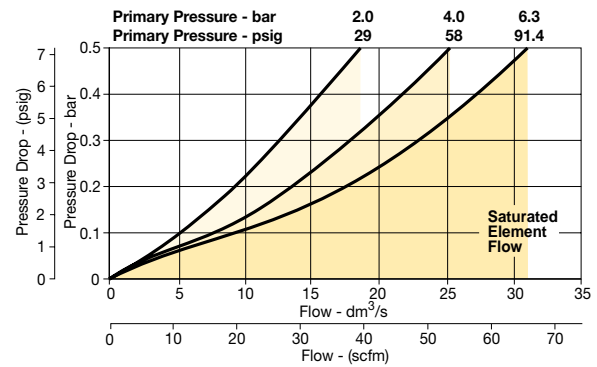

P32 - 0.01 micron flow

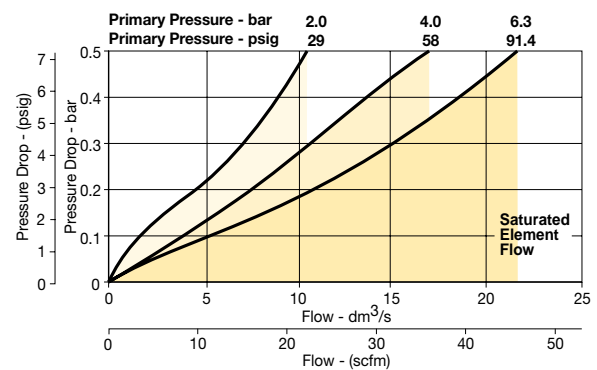

Materials of Construction

Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Filter Element	1.0 and .01 Micron	Borosilicate Cloth
Adsorber	Activated Carbon	
Seals	Nitrile	
Sight Gauge	Metal Bowl	Polycarbonate

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P32KA00BGM
Metal bowl / Sight gauge manual drain	P32KA00BSM
Auto drain	P32KA00DA
1µ coalescing filter element	P32KA00ES9
0.01µ coalescing filter element	P32KA00ESC
Activated carbon adsorber filter element	P32KA00ESA
L-Bracket (fits to body)	P32KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB
Differential pressure indicator (replacement)	P32KA00RQ

Global Air Preparation System**Standard Coalescing and Adsorber Filter - P33**

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Differential Pressure Indicator (DPI) standard on Coalescing Filters
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

Note: To optimize the life of coalescing element, it is advisable to install a P33F pre-filter with a 5 micron element upstream of the coalescing filter.

To optimize the life of an Adsorber it is advisable to install a P33 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

Options:

P 33 F	A						N
Engr. level	Thread type	Port size	Bowl type	Element	Drain type	Mounting	
Current A	BSPP 1 BSPT 2 NPT 9	1/2 4 3/4 6	Poly bowl with bowl guard G Metal bowl without sight gauge M Metal bowl with sight gauge S	0.01μ Element C 0.01μ Element with dpi D 1μ Element 9 1μ Element with dpi Q Adsorber A	Manual drain M Auto drain A	No bracket N	

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - 0.01 Micron, Manual drain	P33FA94DGMN	20 (42)	10 (150)	235 (9.3)	73 (2.9)	73 (2.9)
1/2"	Poly bowl - 0.01 Micron, Auto drain	P33FA94DGAN	20 (42)	10 (150)	229 (9.0)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - 0.01 Micron, Manual drain	P33FA94DSMN	20 (42)	17 (250)	235 (9.3)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - 0.01 Micron, Auto drain	P33FA94DSAN	20 (42)	17 (250)	229 (9.0)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - 0.01 Micron, Manual drain	P33FA96DGMN	20 (42)	10 (150)	235 (9.3)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - 0.01 Micron, Auto drain	P33FA96DGAN	20 (42)	10 (150)	229 (9.0)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - 0.01 Micron, Manual drain	P33FA96DSMN	20 (42)	17 (250)	235 (9.3)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - 0.01 Micron, Auto drain	P33FA96DSAN	20 (42)	17 (250)	229 (9.0)	73 (2.9)	73 (2.9)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity			dm ³ /s	SCFM
1.0 Micron Coalescing	Energy Efficient Flow*	32	(68)	
	Maximum Flow**	44	(93)	
0.01 Micron Coalescing	Energy Efficient Flow*	20	(42)	
	Maximum Flow**	34	(72)	
Activated Carbon Adsorber	Rated Flow*	44	(93)	
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)		
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)		
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)		
	Metal Bowl	17 bar (250 psig)		
Standard Filtration		1.0 and 0.01 Micron		
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)		
Useful Retention†		85 cm ³ (2.8 US oz.)		
Port Size		BSPP / BSPT / NPT		1/2, 3/4
Weight		0.50 kg (1.10 lbs)		

* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.

** Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.

† Useful retention refers to volume below the quiet zone baffle.

Dimensions mm (inches)

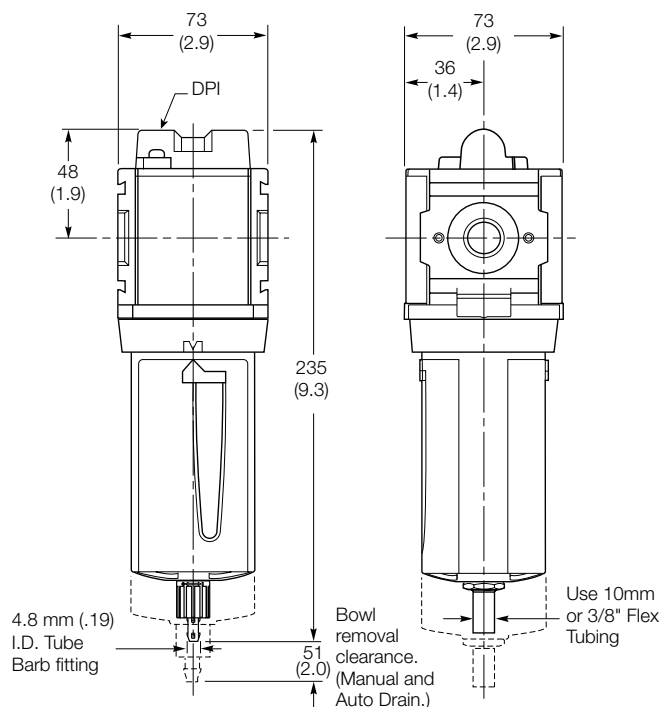


Manual Drain


Automatic Drain

Flow Charts

P33 - 1.0 micron flow

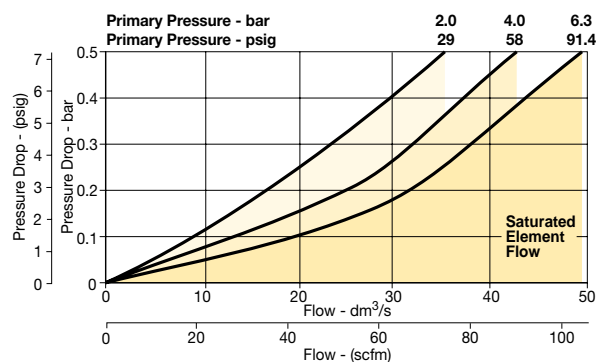

P33 - 0.01 micron flow

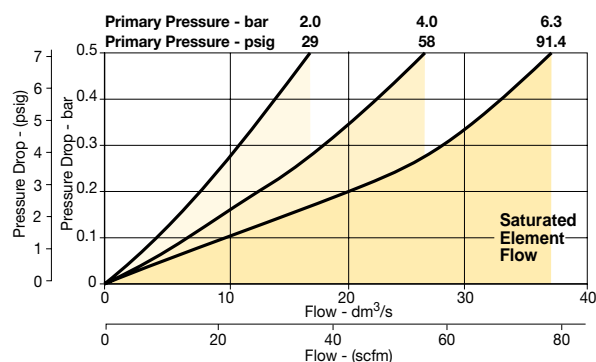

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Filter Element	1.0 and .01 Micron	Borosilicate Cloth
Adsorber	Activated Carbon	
Seals	Nitrile	
Sight Gauge	Metal Bowl	Polycarbonate

Repair and Service Kits


Plastic bowl / Bowl guard manual drain	P33KA00BGM
Metal bowl / Sight gauge manual drain	P33KA00BSM
Auto drain	P32KA00DA
1μ coalescing filter element	P33KA00ES9
0.01μ coalescing filter element	P33KA00ESC
Activated carbon adsorber filter element	P33KA00ESA
L-Bracket (fits to body)	P33KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB
Differential pressure indicator (replacement)	P32KA00RQ

Mini Regulator - P31

Symbols



Self relieving regulator
with gauge



Non relieving regulator

- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation.
- Relieving & Non-relieving types
- Non-rising knob

Options:

P 3 1 R

A

N

P

Engr. level

Current **A**

Thread type

BSPP **1**

BSPT **2**

NPT **9**

Port size

1/4 **2**

Relief

Relieving **B**

Non relieving **N**

Reverse flow / relieving **R**

Adjustment range

With square gauge

psig bar

30* = **1** 2* = **V**

60 = **3** 4 = **S**

125 = **5** 8 = **T**

Without gauge†

psig bar

30 = **Y** 2 = **Y**

60 = **L** 4 = **L**

125 = **N** 8 = **N**

Mounting

Plastic panel mount nut **P**

* Unit comes with 0-4 bar or 0-60 psig gauge respectively.

† Order round gauges separately - see next page.

Port size	Description	Order Code†	Flow‡ dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving	P31RA92BNNP	30 (64)	20 (300)	100.1 (3.94)	40 (1.58)	40 (1.58)
1/4"	8 bar (125 psig) + gauge	P31RA92BN5P	30 (64)	20 (300)	100.1 (3.94)	40 (1.58)	64.3 (2.53)

† Standard part numbers shown in bold. For other models refer to Options chart above.
‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

30

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/globalfrl

Global Air Preparation System

Specifications

Flow Capacity*	1/4	30 dm ³ /s (64 scfm)
Operating Temperature†	-20°C to 65.5°C (-4°F to 150°F)	
Max. Supply Pressure	20 bar (300 psig)	
Adjusting Range Pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig)	
Port Size	BSPP / BSPT / NPT	1/4
Gauge Port (2 ea.)**	BSPP / BSPT / NPT	1/8
Weight	0.17 kg (0.37 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).


** Non-gauge option only.

† Units with square gauges: -15°C to 65.5°C (5°F to 150°F)

Materials of Construction

Body	Aluminum
Adjustment Knob	Acetal
Body Cap	ABS
Bonnet	PBT
Diaphragm Assembly	Brass / Nitrile
Bottom Plug	33% Glass-Filled Nylon
Valve Assembly	Brass / Nitrile
Springs	Steel
Seals	Nitrile
Panel Nut	Acetal

Dimensions mm (inches)

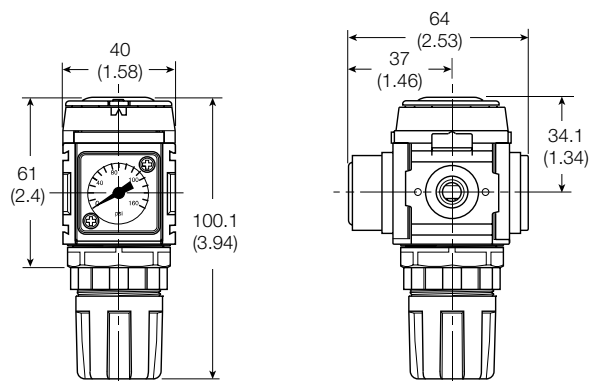

NOTE: 31.7 mm (1.25 in.) hole required for panel nut mounting.



WARNING


**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.**

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Flow Charts

1/4 Regulator

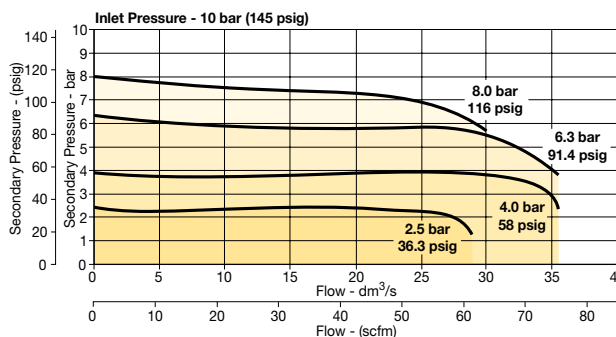

Repair and Service Kits

Regulator repair kit - Relieving	P31KA00RB
Regulator repair kit - Non-relieving	P31KA00RC
Panel mount nut - Aluminum	P31KA00MM
Panel mount nut - Plastic	P31KA00MP
Angle Bracket (uses panel mount threads)	P31KA00MR
C-Bracket (fits to body)	P31KA00MW
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB

Gauges

Square flush mount gauge

0-4 bar	K4511SCR04B
0-10 bar	K4511SCR11B
0-60 psig	K4511SCR060
0-150 psig	K4511SCR150

1.00" Round 1/8" center back mount

0-60 psig / 0-4 bar	K4510N18060
0-160 psig / 0-11 bar	K4510N18160


40mm Round 1/8" center back mount

(Not for use with Common Port Regulators)


0-30 psig / 0-2 bar	K4515N18030
0-60 psig / 0-4 bar	K4515N18060
0-160 psig / 0-11 bar	K4515N18160

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Mini Common - P1 Regulator - P31

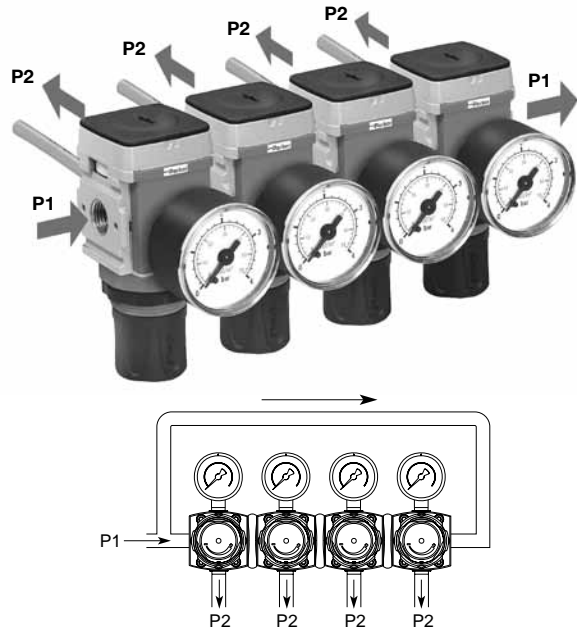

Symbols

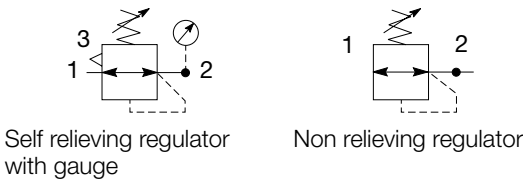

- Manifold style regulator with line pressure on both sides.
- Pressure output is at front or rear.
- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

Options:

P 3 1 H

Engr. level

Current

A

A

Thread type

BSPP

1

BSPT

2

NPT

9

Port size

1/4

2

Relief

Relieving

B

Non relieving

N

Adjustment range

Without gauge

2 bar; 30 psig

Y

4 bar; 60 psig

L

8 bar; 125 psig

N

N

Mounting

Plastic panel mount nut

P

Order gauges separately - see next page.

Port size	Description	Order Code†	Flow‡ dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) Relieving	P31HA92BNNP	18 (38)	20 (300)	100.1 (3.94)	40 (1.58)	40 (1.58)

† Standard part numbers shown in bold. For other models refer to Options chart above.
‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3) psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/4	18 dm ³ /s (38 scfm)
Operating Temperature	-20°C to 65.5°C (-4°F to 150°F)	
Max. Supply Pressure	20 bar (300 psig)	
Adjusting Range Pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig)	
P1 Port Size (Inlet / Outlet)	BSPP / BSPT / NPT	1/4
P2 Regulated Ports (2 ea.)	BSPP / BSPT / NPT	1/8
Weight	0.30 kg (0.66 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

Materials of Construction

Body	Zinc
Adjustment Knob	Acetal
Body Cap	ABS
Bonnet	33% Glass-filled PBT
Diaphragm Assembly	Brass / Nitrile
Bottom Plug	33% Glass-filled Nylon
Valve Assembly	Brass / Nitrile

Dimensions mm (inches)

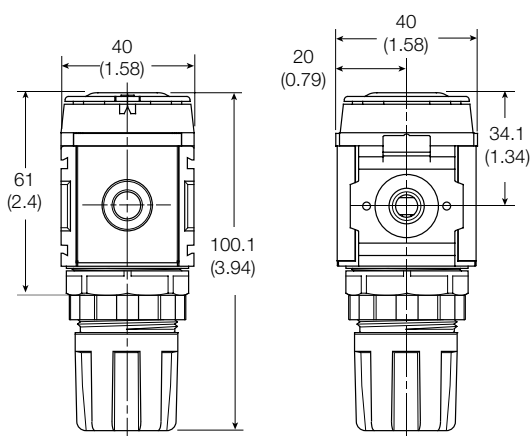

NOTE: 31.7 mm (1.25 in.) hole required for panel nut mounting.



WARNING


**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.**

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Flow Charts

1/4 Common Regulator

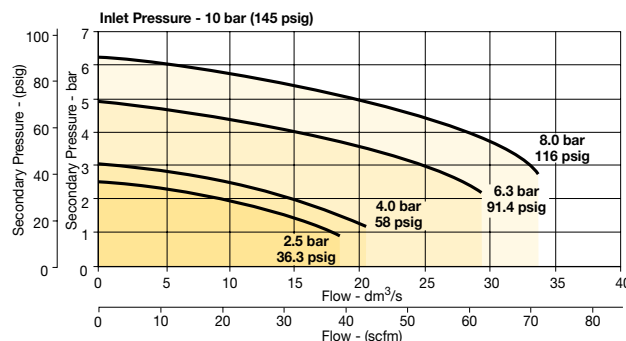

Repair and Service Kits



Regulator repair kit - Relieving	P31KA00RB
Regulator repair kit - Non-relieving	P31KA00RC
Panel mount nut - Aluminum	P31KA00MM
Panel mount nut - Plastic	P31KA00MP
Angle Bracket (uses panel mount threads)	P31KA00MR
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB

Gauges

1.00" Round 1/8" center back mount

0-60 psig / 0-4 bar	K4510N18060
0-160 psig / 0-11 bar	K4510N18160

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Global Air Preparation System**Compact Regulator – P32****Symbols**Self relieving regulator
with gauge

Non relieving regulator

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

Options:

P 3 2 R	A				N		P
Engr. level		Thread type		Port size		Mounting	
Current A		BSPP 1		1/4 2		Plastic panel mount nut P	
		BSPT 2		3/8 3			
		NPT 9		1/2 4			
		Relief			Adjustment range		
		Relieving B			With round gauge		
		Non relieving N			2 bar; 30 psig; 0.2 MPa Z		
		Reverse flow / relieving R			4 bar; 60 psig; 0.4 MPa M		
					8 bar; 125 psig; 0.8 MPa G		
					17 bar; 250 psig; 1.7 MPa J		
					Without gauge		
					2 bar; 30 psig; 0.2 MPa Y		
					4 bar; 60 psig; 0.4 MPa L		
					8 bar; 125 psig; 0.8 MPa N		
					17 bar; 250 psig; 1.7 MPa H		

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) Relieving	P32RA92BNNP	41 (81)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) Relieving + Gauge	P32RA92BNGP	41 (81)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving	P32RA93BNNP	65 (138)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving + Gauge	P32RA93BNGP	65 (138)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) Relieving	P32RA94BNNP	67 (142)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) Relieving + Gauge	P32RA94BNGP	67 (142)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/4	41 dm ³ /s (81 scfm)
	3/8	65 dm ³ /s (138 scfm)
	1/2	67 dm ³ /s (142 scfm)
Operating Temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. Supply Pressure	20 bar (300 psig)	
Adjusting Range Pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port Size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge Port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.41 kg (0.90 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

Materials of Construction

Body	Aluminum	
Adjustment Knob	Acetal	
Body Cap	ABS	
Bonnet	33% Glass-filled nylon	
Diaphragm Assembly	Nitrile / Zinc	
Bottom Plug	33% Glass-filled Nylon	
Valve Assembly	Brass / Nitrile	
Springs	Main Regulating Valve	Steel S.S.
Seals	Nitrile	
Panel Nut	Acetal	

Dimensions mm (inches)

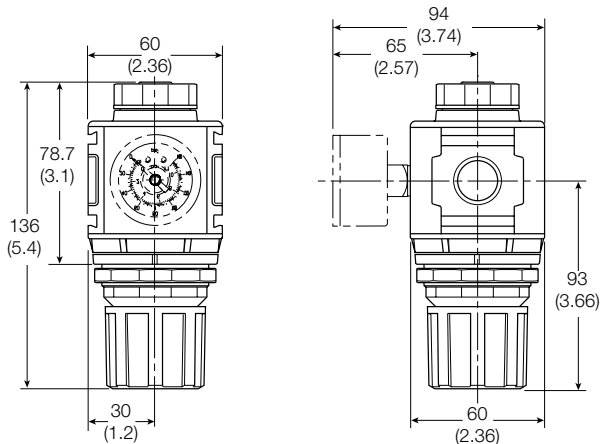

NOTE: 51 mm (2.00 in.) hole required for panel nut mounting.



WARNING


**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.**

CAUTION:


REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Flow Charts


1/4 Regulator

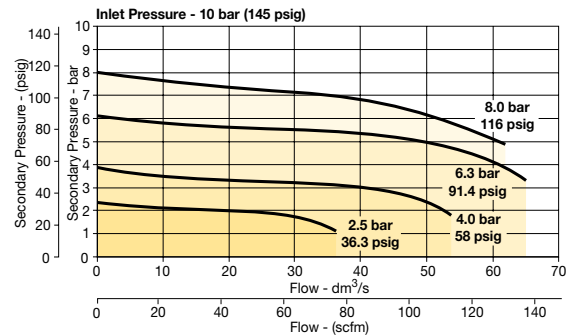

3/8 Regulator

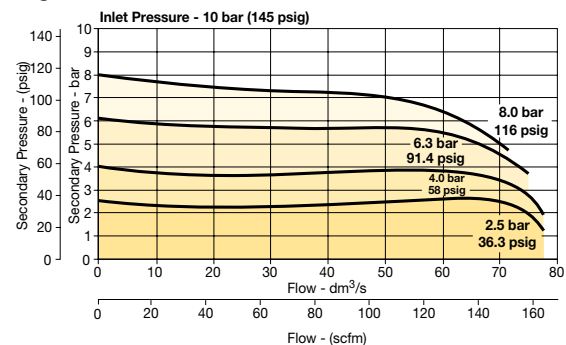

1/2 Regulator

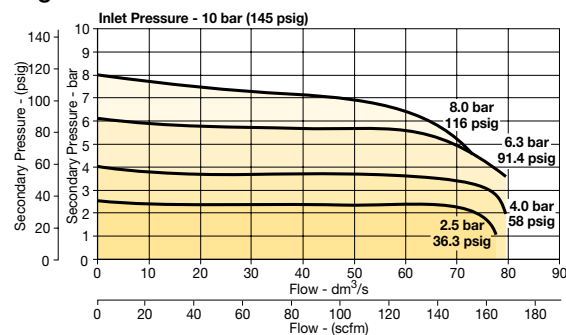

Repair and Service Kits

Regulator repair kit - Relieving	P32KA00RB
Regulator repair kit - Non-relieving	P32KA00RC
Panel mount nut - Aluminum	P32KA00MM
Panel mount nut - Plastic	P32KA00MP
Angle Bracket (uses panel mount threads)	P32KA00MR
T-Bracket with body connector	P32KA00MT
T-Bracket	P32KA00MB
Body connector	P32KA00CB

Gauges

50mm (2") Round 1/4" center back mount


0-30 psig / 0-2 bar / 0-0.2 MPa	K4520N14030
0-60 psig / 0-4 bar / 0-0.4 MPa	K4520N14060
0-160 psig / 0-11 bar / 0-1.1 MPa	K4520N14160
0-300 psig / 0-20 bar / 0-2 MPa	K4520N14300

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.




Global Air Preparation System


Compact Common P1 Regulator - P32

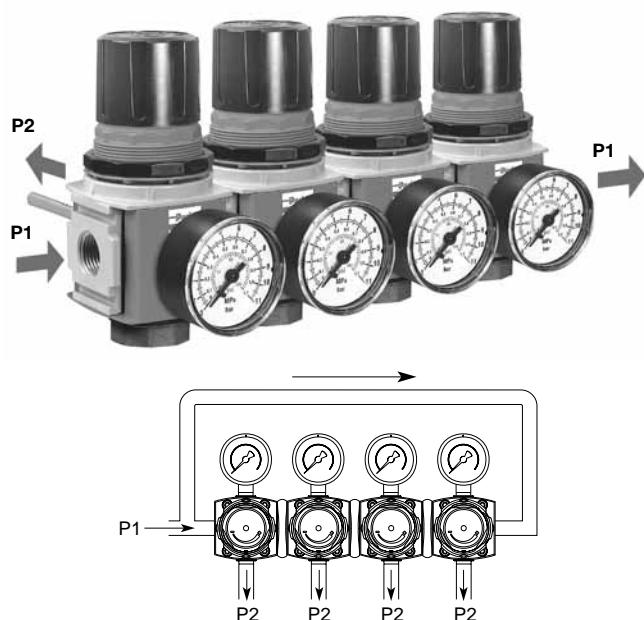

Symbols



Self relieving regulator with gauge



Non relieving regulator

- Manifold style regulator with line pressure on both sides.
- Pressure output is at front or rear.
- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

Options:

P 3 2 H	A				N		P																																
<table border="1"> <tr><td colspan="2">Engr. level</td></tr> <tr><td>Current</td><td>A</td></tr> </table>		Engr. level		Current	A	<table border="1"> <tr><td colspan="2">Thread type</td></tr> <tr><td>BSPP</td><td>1</td></tr> <tr><td>BSPT</td><td>2</td></tr> <tr><td>NPT</td><td>9</td></tr> </table>		Thread type		BSPP	1	BSPT	2	NPT	9	<table border="1"> <tr><td colspan="2">Port size</td></tr> <tr><td>1/4</td><td>2</td></tr> <tr><td>3/8</td><td>3</td></tr> <tr><td>1/2</td><td>4</td></tr> </table>		Port size		1/4	2	3/8	3	1/2	4	<table border="1"> <tr><td colspan="2">Adjustment range</td></tr> <tr> <td>Without gauge</td> <td></td> </tr> <tr><td>2 bar; 30 psig; 0.2 MPa</td><td>Y</td></tr> <tr><td>4 bar; 60 psig; 0.4 MPa</td><td>L</td></tr> <tr><td>8 bar; 125 psig; 0.8 MPa</td><td>N</td></tr> <tr><td>17 bar; 250 psig; 1.7 MPa</td><td>H</td></tr> </table>		Adjustment range		Without gauge		2 bar; 30 psig; 0.2 MPa	Y	4 bar; 60 psig; 0.4 MPa	L	8 bar; 125 psig; 0.8 MPa	N	17 bar; 250 psig; 1.7 MPa	H
Engr. level																																							
Current	A																																						
Thread type																																							
BSPP	1																																						
BSPT	2																																						
NPT	9																																						
Port size																																							
1/4	2																																						
3/8	3																																						
1/2	4																																						
Adjustment range																																							
Without gauge																																							
2 bar; 30 psig; 0.2 MPa	Y																																						
4 bar; 60 psig; 0.4 MPa	L																																						
8 bar; 125 psig; 0.8 MPa	N																																						
17 bar; 250 psig; 1.7 MPa	H																																						
		<table border="1"> <tr><td colspan="2">Relief</td></tr> <tr><td>Relieving</td><td>B</td></tr> <tr><td>Non relieving</td><td>N</td></tr> </table>		Relief		Relieving	B	Non relieving	N	<table border="1"> <tr><td colspan="2">Mounting</td></tr> <tr><td>Plastic panel mount nut</td><td>P</td></tr> </table>		Mounting		Plastic panel mount nut	P																								
Relief																																							
Relieving	B																																						
Non relieving	N																																						
Mounting																																							
Plastic panel mount nut	P																																						

Order gauges separately- see next page.

Port size	Description	Order Code†	Flow† dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) Relieving	P32HA92BNNP	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving	P32HA93BNNP	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) Relieving	P32HA94BNNP	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3) psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/4	28 dm ³ /s (59 scfm)
	3/8	28 dm ³ /s (59 scfm)
	1/2	28 dm ³ /s (59 scfm)
Operating Temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. Supply Pressure	20 bar (300 psig)	
Adjusting Range Pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port Size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge Port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.50 kg (1.10 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

Materials of Construction

Body	Zinc	
Adjustment Knob	Acetal	
Body Cap	ABS	
Bonnet	33% Glass-filled nylon	
Diaphragm Assembly	Nitrile / Zinc	
Bottom Plug	33% Glass-filled Nylon	
Valve Assembly	Brass / Nitrile	
Springs	Main Regulating Valve	Steel S.S.
Seals	Nitrile	
Panel Nut	Acetal	

Dimensions mm (inches)

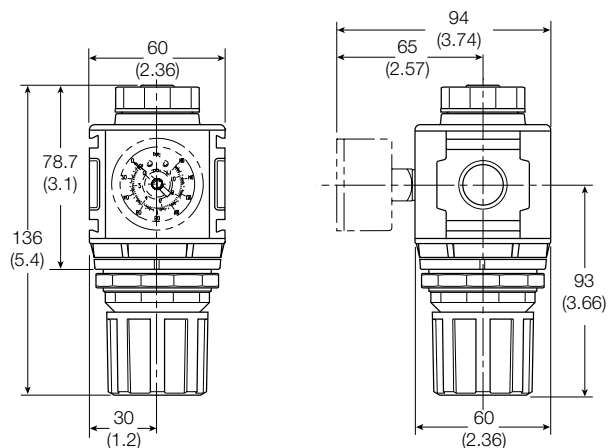

NOTE: 51 mm (2.00 in.) hole required for panel nut mounting.



WARNING


**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.**

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Flow Charts

P32 Common Port Regulator

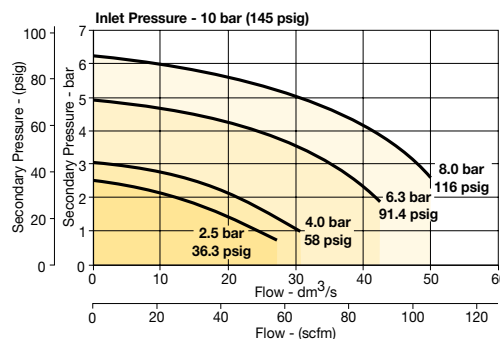

Repair and Service Kits



Regulator repair kit - Relieving	P32KA00RB
Regulator repair kit - Non-relieving	P32KA00RC
Panel mount nut - Aluminum	P32KA00MM
Panel mount nut - Plastic	P32KA00MP
Angle Bracket (uses panel mount threads)	P32KA00MR
T-Bracket with body connector	P32KA00MT
T-Bracket	P32KA00MB
Body connector	P32KA00CB

Gauges

50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar / 0-0.2 MPa	K4520N14030
0-60 psig / 0-4 bar / 0-0.4 MPa	K4520N14060
0-160 psig / 0-11 bar / 0-1.1 MPa	K4520N14160
0-300 psig / 0-20 bar / 0-2 MPa	K4520N14300

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Global Air Preparation System**Standard Regulator - P33****Symbols**Self relieving regulator
with gauge

Non relieving regulator

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

Options:

P 3 3 R	A				N		P
Engr. level		Thread type		Port size		Mounting	
Current A		BSPP 1		1/2 4		Plastic panel mount nut P	
		BSPT 2		3/4 6			
		NPT 9					
		Relief					
		Relieving B					
		Non relieving N					
		Reverse flow / relieving R					
				Adjustment range			
				With round gauge			
				2 bar; 30 psig; 0.2 MPa Z			
				4 bar; 60 psig; 0.4 MPa M			
				8 bar; 125 psig; 0.8 MPa G			
				17 bar; 250 psig; 1.7 MPa J			
				Without gauge			
				2 bar; 30 psig; 0.2 MPa Y			
				4 bar; 60 psig; 0.4 MPa L			
				8 bar; 125 psig; 0.8 MPa N			
				17 bar; 250 psig; 1.7 MPa H			

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	8 bar (125 psig) Relieving	P33RA94BNNP	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig) Relieving + Gauge	P33RA94BNGP	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig) Relieving	P33RA96BNNP	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig) Relieving + Gauge	P33RA96BNGP	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/2	100 dm ³ /s (212 scfm)
	3/4	100 dm ³ /s (212 scfm)
Operating Temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. Supply Pressure	20 bar (300 psig)	
Adjusting Range Pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port Size	BSPP / BSPT / NPT	1/2, 3/4
Gauge Port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.62 kg (1.37 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

Materials of Construction

Body	Aluminum	
Adjustment Knob	Acetal	
Body Cap	ABS	
Bonnet	33% Glass-filled Nylon	
Diaphragm Assembly	Nitrile / Zinc	
Valve Assembly	Brass / Nitrile / Acetal	
Springs	Main Regulating Valve	Steel S.S.
Seals	Nitrile	
Panel Nut	Acetal	

Dimensions mm (inches)

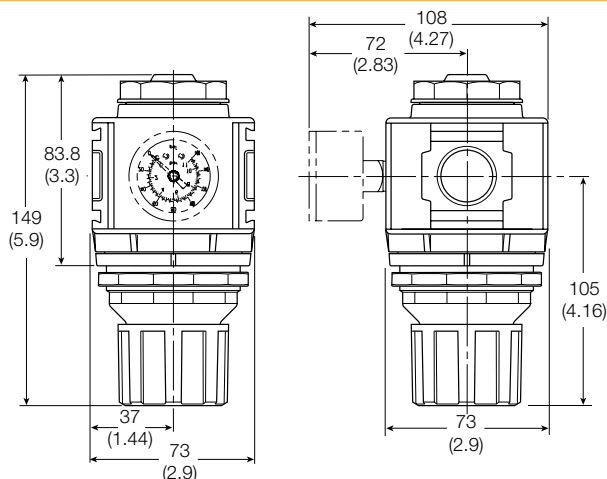

NOTE: 61 mm (2.40 in.) hole required for panel nut mounting.



WARNING


**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.**

CAUTION:


REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Flow Charts

1/2 Regulator

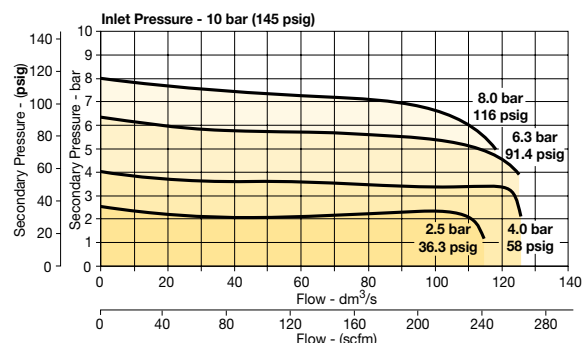

3/4 Regulator

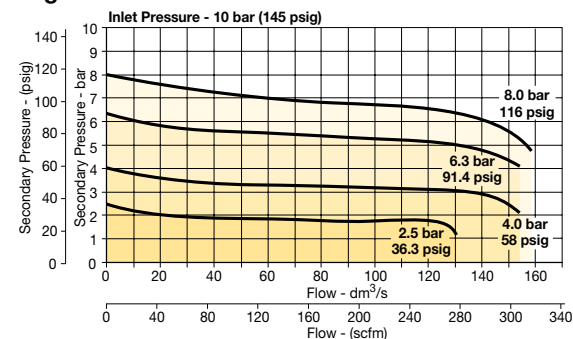

Repair and Service Kits


Regulator repair kit - Relieving	P33KA00RB
Regulator repair kit - Non-relieving	P33KA00RC
Panel mount nut - Aluminum	P33KA00MM
Panel mount nut - Plastic	P33KA00MP
Angle Bracket (uses panel mount threads)	P33KA00MR
T-Bracket with body connector	P32KA00MT
T-Bracket	P32KA00MB
Body connector	P32KA00CB

Gauges

50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar / 0-0.2 MPa	K4520N14030
0-60 psig / 0-4 bar / 0-0.4 MPa	K4520N14060
0-160 psig / 0-11 bar / 0-1.1 MPa	K4520N14160
0-300 psig / 0-20 bar / 0-2 MPa	K4520N14300

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Global Air Preparation System**Mini Filter / Regulator - P31****Symbols**

- Integral 1/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting

Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig)

- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

Options:

P 3 1 E	A			E				N		P																	
Engr. level		Thread type		Drain type		Relief		Adjustment range		Mounting																	
Current A		BSPP 1 BSPT 2 NPT 9		Pulse drain B Manual drain M		Relieving B Non relieving N		With square gauge <table border="1"> <tr> <th>psig</th> <th>bar</th> </tr> <tr> <td>30* = 1</td> <td>2* = V</td> </tr> <tr> <td>60 = 3</td> <td>4 = S</td> </tr> <tr> <td>125 = 5</td> <td>8 = T</td> </tr> </table> Without gauge <table border="1"> <tr> <th>psig</th> <th>bar</th> </tr> <tr> <td>30 = Y</td> <td>2 = Y</td> </tr> <tr> <td>60 = L</td> <td>4 = L</td> </tr> <tr> <td>125 = N</td> <td>8 = N</td> </tr> </table>		psig	bar	30* = 1	2* = V	60 = 3	4 = S	125 = 5	8 = T	psig	bar	30 = Y	2 = Y	60 = L	4 = L	125 = N	8 = N	Plastic panel mount nut P	
psig	bar																										
30* = 1	2* = V																										
60 = 3	4 = S																										
125 = 5	8 = T																										
psig	bar																										
30 = Y	2 = Y																										
60 = L	4 = L																										
125 = N	8 = N																										
Port size		Element		Bowl type																							
1/4 2		5µ Element E		Poly bowl with bowl guard G Metal bowl without sight gauge M																							

* Unit comes with 0-4 bar, 0-60 psig gauge respectively

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) Relieving - Poly bowl - Manual drain	P31EA92EGMBN5P	14 (30)	10 (150)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) Relieving - Poly bowl - Pulse drain	P31EA92EGBBN5P	14 (30)	10 (150)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) Relieving - Metal bowl - Manual drain	P31EA92EMMBN5P	14 (30)	17 (250)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) Relieving - Metal bowl - Pulse drain	P31EA92EMB5P	14 (30)	17 (250)	164.1 (6.46)	40 (1.58)	64 (2.53)

† **Standard part numbers shown in bold. For other models refer to Options chart above.**

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3) psig set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/4	14 dm ³ /s (30.0 scfm)
Operating Temperature†	Plastic Bowl	-10°C to 52°C (14°F to 125°F)
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Standard Filtration		5 Micron
Useful Retention		12 cm ³ (0.4 US oz.)
Adjusting Range Pressure		0-2 bar (30 psig)
		0-4 bar (60 psig)
		0-8 bar (125 psig)
Port Size	BSPP / BSPT / NPT	1/4
Gauge Port (2 ea.)**	BSPP / BSPT / NPT	1/8
Weight		0.19 kg (0.42 lbs)

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

** Non-gauge option only.

† Units with square gauges: -15°C to 65.5°C (5°F to 150°F)

Air quality:

Within ISO 8573-1: 1991 Class 3 (Particulates)


Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction

Body		Aluminum
Adjustment Knob		Acetal
Body Cap		ABS
Bonnet		PBT
Bowl	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Bowl Guard		Nylon
Filter Element		Polyethylene
Seals		Nitrile
Springs		Steel
Valve Assembly		Brass / Nitrile
Diaphragm Assembly		Brass / Nitrile
Panel Nut		Acetal

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Dimensions mm (inches)

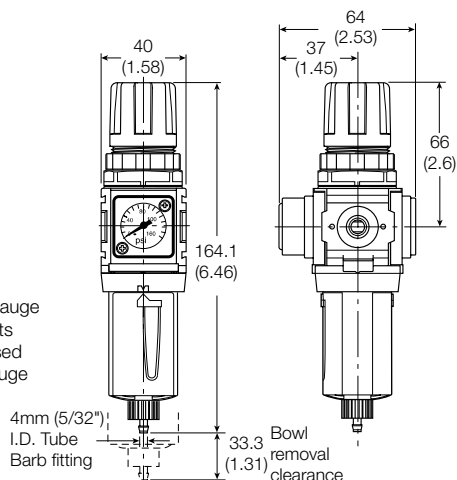


Note:

Flush-mounted gauge kits will not fit units originally purchased with threaded gauge ports.

Flow Charts

1/4 Filter/Regulator

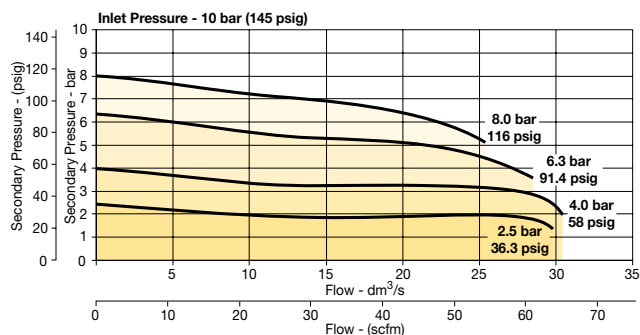

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P31KA00BGM
Metal bowl / w/o sight gauge manual drain	P31KA00BMM
Plastic bowl / Bowl guard pulse drain	P31KA00BGB
Metal bowl / w/o sight gauge pulse drain	P31KA00BMB
5μ particle filter element	P31KA00ESE
Regulator repair kit - Relieving	P31KA00RB
Regulator repair kit - Non-relieving	P31KA00RC
Panel mount nut - Aluminum	P31KA00MM
Panel mount nut - Plastic	P31KA00MP
Angle Bracket (uses panel mount threads)	P31KA00MR
C-Bracket (fits to body)	P31KA00MW
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB

Gauges

Square flush mount gauge


0-4 bar	K4511SCR04B
0-10 bar	K4511SCR11B
0-60 psig	K4511SCR060
0-150 psig	K4511SCR150

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.



WARNING

Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.

Global Air Preparation System**Compact Filter / Regulator - P32****Symbols**

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

Options:

P	3	2	E	A			E					N		P	
Thread type				Port size		Drain type		Mounting							
BSPP		1	1/4		2	Manual drain		M	Plastic panel mount nut						P
BSPT		2	3/8		3	Auto drain		A							
NPT		9	1/2		4										
Engr. level			Element				Relief		Adjustment range						
Current			A	5µ Element		E	Relieving		B	With round gauge					
							Non relieving		N	2 bar; 30 psig; 0.2 MPa					Z
										4 bar; 60 psig; 0.4 MPa					M
										8 bar; 125 psig; 0.8 MPa					G
										17 bar; 250 psig; 1.7 MPa					J*
										Without gauge					
										2 bar; 30 psig; 0.2 MPa					Y
										4 bar; 60 psig; 0.4 MPa					L
										8 bar; 125 psig; 0.8 MPa					N
										17 bar; 250 psig; 1.7 MPa					H*
Bowl type															
Poly bowl with bowl guard												G			
Metal bowl without sight gauge												M			
Metal bowl with sight gauge												S			

* Not available with poly bowl with bowl guard.

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) Relieving - Poly bowl - Manual drain	P32EA92EGMBNGP	42 (89)	10 (150)	254 (10.0)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) Relieving - Poly bowl - Auto drain	P32EA92EGABNGP	42 (89)	10 (150)	248 (9.76)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) Relieving - Metal bowl - Manual drain	P32EA92ESMBNGP	42 (89)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) Relieving - Metal bowl - Auto drain	P32EA92ESABNGP	42 (89)	17 (250)	254 (10.0)	60 (2.36)	95 (3.74)
3/8"	8 bar (125 psig) Relieving - Poly bowl - Manual drain	P32EA93EGMBNGP	58 (123)	10 (150)	254 (10.0)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving - Poly bowl - Auto drain	P32EA93EGABNGP	58 (123)	10 (150)	248 (9.76)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving - Metal bowl - Manual drain	P32EA93ESMBNGP	58 (123)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) Relieving - Metal bowl - Auto drain	P32EA93ESABNGP	58 (123)	17 (250)	254 (10.0)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) Relieving - Poly bowl - Manual drain	P32EA94EGMBNGP	64 (136)	10 (150)	245 (9.66)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) Relieving - Poly bowl - Auto drain	P32EA94EGABNGP	64 (136)	10 (150)	248 (9.76)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) Relieving - Metal bowl - Manual drain	P32EA94ESMBNGP	64 (136)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) Relieving - Metal bowl - Auto drain	P32EA94ESABNGP	64 (136)	17 (250)	254 (10.0)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/4	42 dm ³ /s (89 scfm)
	3/8	58 dm ³ /s (123 scfm)
	1/2	64 dm ³ /s (136 scfm)
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Standard Filtration	5 Micron	
Useful Retention†	51 cm ³ (1.7 US oz.)	
Adjusting Range Pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port Size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge Port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.53 kg (1.17 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

† Useful retention refers to volume below the quiet zone baffle.

Air quality:


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction

Body	Aluminum	
Adjustment Knob	Acetal	
Body Cap	ABS	
Element Retainer / Baffle	Acetal	
Bowl	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Bowl Guard	Nylon	
Filter Element	Sintered Polyethylene	
Seals	Nitrile	
Springs	Main Regulating / Valve	Steel / S.S.
Valve Assembly	Brass / Nitrile	
Diaphragm Assembly	Nitrile / Zinc	
Panel Nut	Acetal	
Sight Gauge	Metal Bowl	Polycarbonate

Dimensions mm (inches)

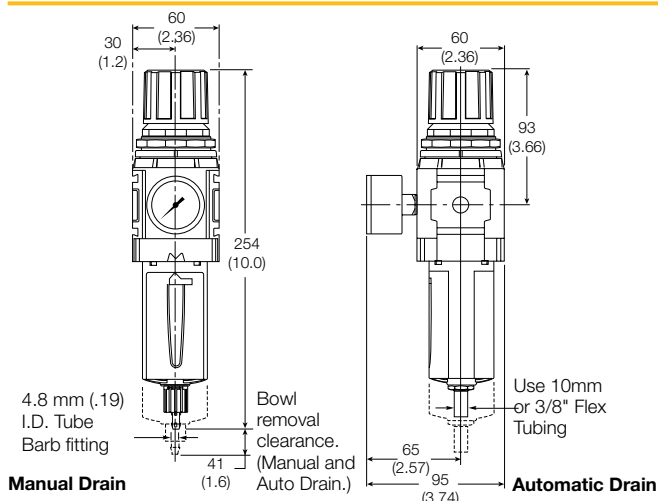


WARNING


Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.

Flow Charts


1/4 Filter/Regulator

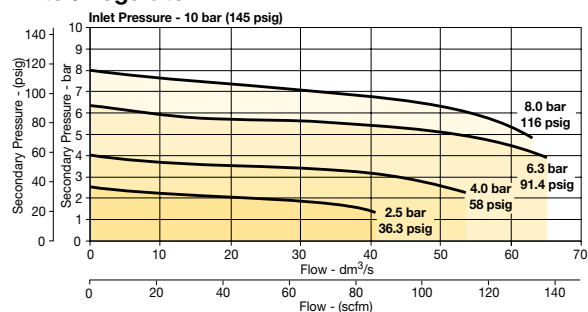

3/8 Filter/Regulator

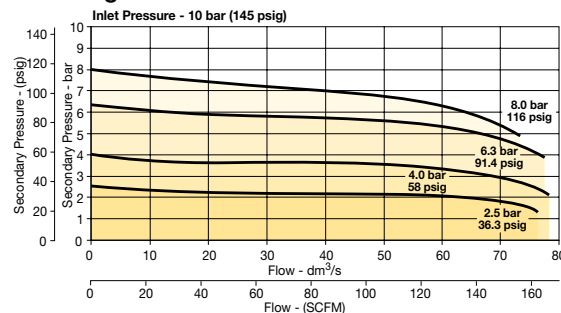

1/2 Filter/Regulator

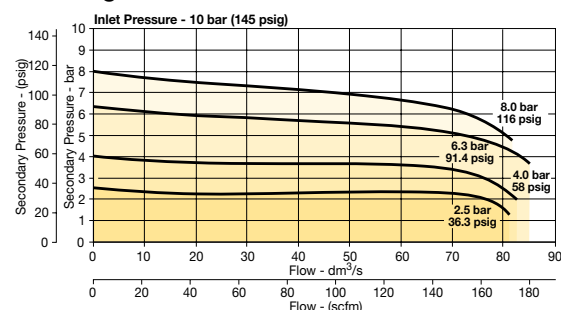

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P32KA00BGM
Metal bowl / Sight gauge manual drain	P32KA00BSM
Auto drain	P32KA00DA
5µ particle filter element	P32KA00ESE
Regulator repair kit - Relieving	P32KA00RB
Regulator repair kit - Non-relieving	P32KA00RC
Panel mount nut - Aluminum	P32KA00MM
Panel mount nut - Plastic	P32KA00MP
Angle Bracket (fits to panel mount threads)	P32KA00MR
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB

Gauges

50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar / 0-0.2 MPa	K4520N14030
0-60 psig / 0-4 bar / 0-0.4 MPa	K4520N14060
0-160 psig / 0-11 bar / 0-1.1 MPa	K4520N14160
0-300 psig / 0-20 bar / 0-2 MPa	K4520N14300


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Global Air Preparation System

Standard Filter / Regulator - P33



Symbols



- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

Options:

[illegible]

Port size	Description		Order Code†	Flow† dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	8 bar (125 psig)	Relieving - Poly bowl - Manual drain	P33EA94EGMBNGP	90 (191)	10 (150)	291 (11.44)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig)	Relieving - Poly bowl - Auto drain	P33EA94EGABNGP	90 (191)	10 (150)	285 (11.22)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig)	Relieving - Metal bowl - Manual drain	P33EA94ESMBNGP	90 (191)	17 (250)	282 (11.0)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig)	Relieving - Metal bowl - Auto drain	P33EA94ESABNGP	90 (191)	17 (250)	291 (11.44)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig)	Relieving - Poly bowl - Manual drain	P33EA96EGMBNGP	98 (208)	10 (150)	282 (11.0)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig)	Relieving - Poly bowl - Auto drain	P33EA96EGABNGP	98 (208)	10 (150)	285 (11.22)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig)	Relieving - Metal bowl - Manual drain	P33EA96ESMBNGP	98 (208)	17 (250)	291 (11.44)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig)	Relieving - Metal bowl - Auto drain	P33EA96ESABNGP	98 (208)	17 (250)	282 (11.0)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/2	90 dm ³ /s (191 scfm)
	3/4	98 dm ³ /s (208 scfm)
Operating Temperature	Plastic Bowl	-25°C to 52°C (-13°F to 125°F)
	Metal Bowl	-25°C to 65.5°C (-13°F to 150°F)
Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Standard Filtration	5 Micron	
Useful Retention†	85 cm ³ (2.8 US oz.)	
Adjusting Range Pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port Size	BSPP / BSPT / NPT	1/2, 3/4
Gauge Port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.85 kg (1.87 lbs)	

* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

† Useful retention refers to volume below the quiet zone baffle.

Air quality:


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

Materials of Construction

Body	Aluminum	
Adjustment Knob	Acetal	
Body Cap	ABS	
Element Retainer / Baffle	Acetal	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Filter Element	Sintered Polyethylene	
Seals	Nitrile	
Springs	Main Regulating / Valve	Steel / S.S.
Valve Assembly	Brass / Nitrile	
Diaphragm Assembly	Nitrile / Zinc	
Panel Nut	Acetal	
Sight Gauge	Metal Bowl	Polycarbonate

Dimensions mm (inches)

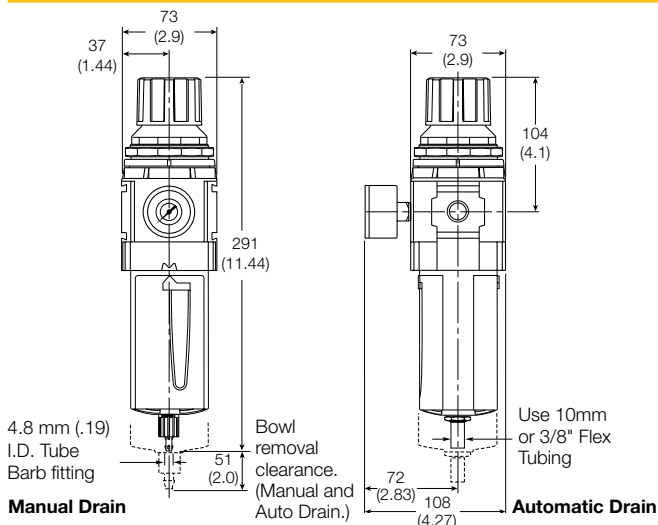


WARNING


Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed Maximum primary pressure rating.

Flow Charts

1/2 Filter/Regulator

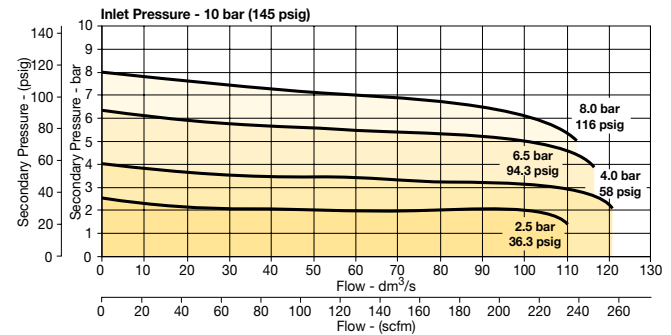

3/4 Filter/Regulator

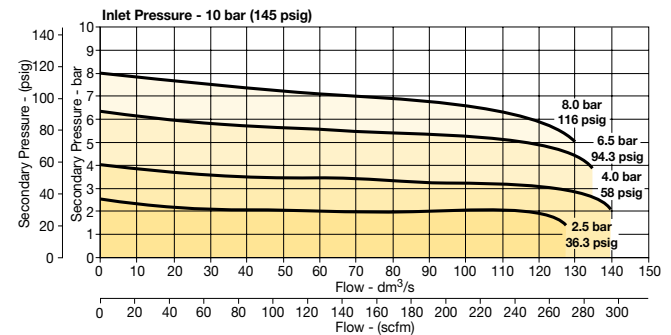

Repair and Service Kits

Plastic bowl / Bowl guard manual drain	P33KA00BGM
Metal bowl / Sight gauge manual drain	P33KA00BSM
Auto drain	P32KA00DA
5μ particle filter element	P33KA00ESE
Regulator repair kit - Relieving	P33KA00RB
Regulator repair kit - Non-relieving	P33KA00RC
Panel mount nut - Aluminum	P33KA00MM
Panel mount nut - Plastic	P33KA00MP
Angle Bracket (fits to panel mount threads)	P33KA00MR
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB

Gauges

50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar / 0-0.2 MPa	K4520N14030
0-60 psig / 0-4 bar / 0-0.4 MPa	K4520N14060
0-160 psig / 0-11 bar / 0-1.1 MPa	K4520N14160
0-300 psig / 0-20 bar / 0-2 MPa	K4520N14300


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Global Air Preparation System

Mini Lubricator - P31



Symbols



Lubricator
with drain

- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment

Options:

P	3	1	L	A			L		N	N
Engr. level					Thread type			Bowl type		
Current A					BSPP	1		Poly bowl with bowl guard G		No bracket N
					BSPT	2		Metal bowl without sight gauge M		
					NPT		9			
						Type		Drain type		
						Oil mist standard sight dome L		No drain; closed end N		

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - No drain	P31LA92LGNN	13 (28)	10 (150)	147.5 (5.80)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - No drain	P31LA92LMNN	13 (28)	17 (250)	147.5 (5.80)	40 (1.58)	42.7 (1.68)

† Standard part numbers shown in bold. For other models refer to Options chart above.

± Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/4	13 dm ³ /s (28 scfm)
Operating Temperature	Plastic Bowl	-10°C to 52°C (14°F to 125°F)
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Useful Retention		18 cm ³ (0.6 US oz.)
Port Size	BSPP / BSPT / NPT	1/4
Weight		0.13 kg (0.29 lbs)

* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowl	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Seals	Nitrile	
Sight Dome	Polycarbonate	
Suggested Lubricant	ISO / ASTM VG32	
Pick-up Filter	Sintered Bronze	

Dimensions mm (inches)

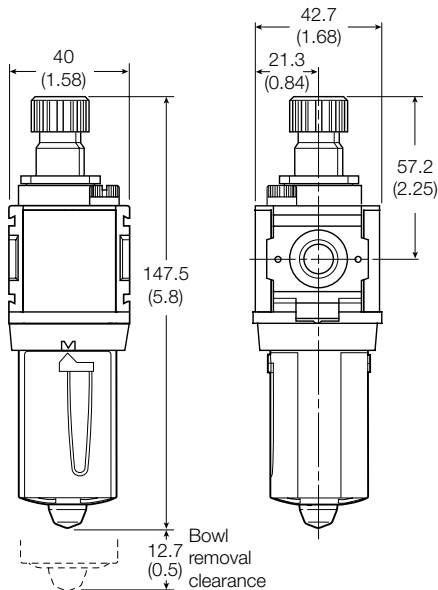

Flow Charts

1/4 Lubricator

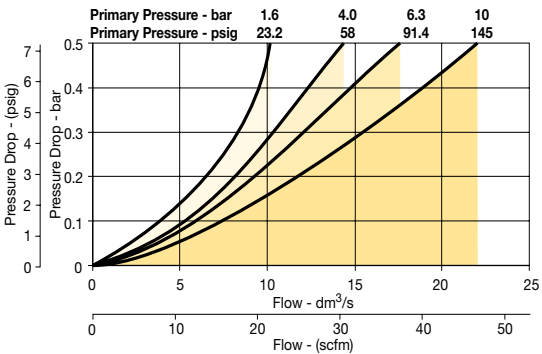

Repair and Service Kits

Plastic bowl / Bowl guard no drain	P31KA00BGN
Drip control assembly	P32KA00PG
Fill plug	P31KA00PL
C-Bracket (fits to body)	P31KA00MW
T-Bracket with body connector	P31KA00MT
Body connector	P31KA00CB

Suggested Lubricant F442 Oil


Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F)
(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Global Air Preparation System

Compact Lubricator - P32



Symbols



Lubricator
with drain

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment
- Fill from top under system pressure

Options:

P 3 2 L	A			L		N	N
Engr. level		Thread type		Port size	Bowl type		Mounting
Current	A	BSPP	1	1/4	Poly bowl with bowl guard	G	No bracket
		BSPT	2	3/8	Metal bowl with sight gauge	S	N
		NPT	9	1/2			
		Type			Drain type		
		Oil mist standard sight dome		L	No drain; closed end		
					N		

Port size	Description	Order Code†	Flow† dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - No drain	P32LA92LGNN	18 (38)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - No drain	P32LA92LSNN	18 (38)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - No drain	P32LA93LGNN	32 (68)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - No drain	P32LA93LSNN	32 (68)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - No drain	P32LA94LGNN	47 (100)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - No drain	P32LA94LSNN	47 (100)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

± Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.

Global Air Preparation System

Specifications


Flow Capacity*	1/4	18 dm ³ /s (38 scfm)
	3/8	32 dm ³ /s (68 scfm)
	1/2	47 dm ³ /s (100 scfm)
Operating Temperature	Plastic Bowl	-10°C to 52°C (14°F to 125°F)
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Useful Retention		121 cm ³ (4.09 US oz.)
Port Size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Weight		0.31 kg (0.68 lbs)

* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Seals	Nitrile	
Sight Dome	Polycarbonate	
Sight Gauge	Metal Bowl	Polycarbonate
Suggested Lubricant	ISO / ASTM VG32	
Pick-up Filter	Sintered Bronze	

Dimensions mm (inches)

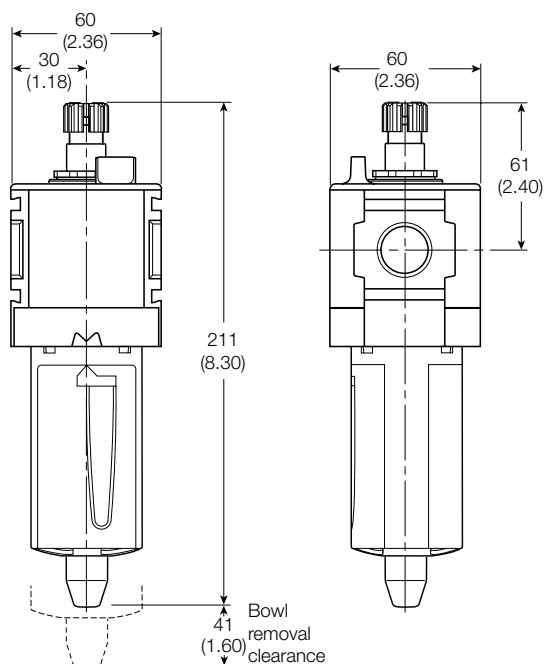


Flow Charts


1/4 Lubricator

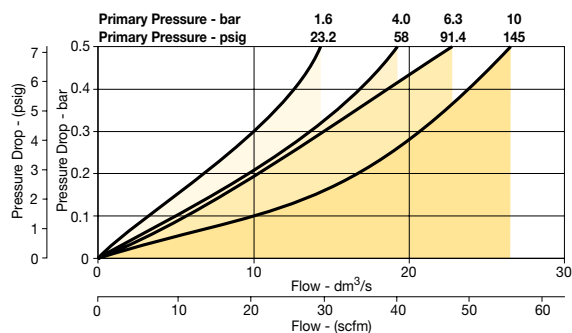

3/8 Lubricator

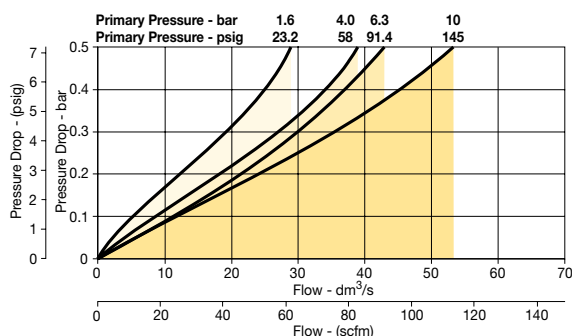

1/2 Lubricator

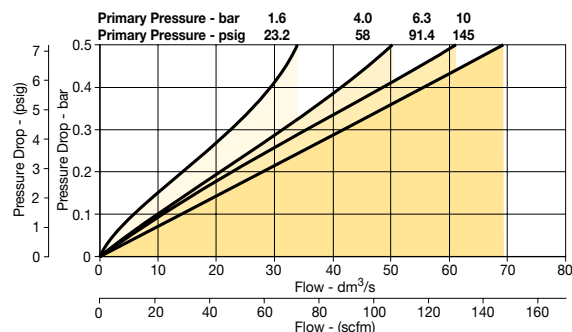

Repair and Service Kits


Plastic bowl / Bowl guard no drain	P32KA00BGN
Drip control assembly	P32KA00PG
Fill plug	P32KA00PL
L-Bracket (fits to body)	P32KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB

Suggested Lubricant F442 Oil

Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F)
(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Standard Lubricator - P33

Symbols



- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment
- Fill from top under system pressure

Options:

P 3 3 L

A

L

N

N

Engr. level
Current **A**

Thread type
BSPP **1**
BSPT **2**
NPT **9**

Port size
1/2 **4**
3/4 **6**

Bowl type
Poly bowl with bowl guard **G**
Metal bowl with sight gauge **S**

Mounting
No bracket **N**

Type
Oil mist standard sight dome **L**

Drain type
No drain; closed end **N**

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - No drain	P33LA94LGNN	48 (102)	10 (150)	234 (9.21)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - No drain	P33LA94LSNN	48 (102)	17 (250)	234 (9.21)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - No drain	P33LA96LGNN	68 (144)	10 (150)	234 (9.21)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - No drain	P33LA96LSNN	68 (144)	17 (250)	234 (9.21)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.
‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.

Global Air Preparation System

Specifications

Flow Capacity*	1/2	48 dm ³ /s (102 scfm)
	3/4	68 dm ³ /s (144 scfm)
Operating Temperature	Plastic Bowl	-10°C to 52°C (14°F to 125°F)
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)
Max. Supply Pressure	Plastic Bowl	10 bar (150 psig)
	Metal Bowl	17 bar (250 psig)
Useful Retention		181 cm ³ (6.1 US oz.)
Port Size	BSPP / BSPT / NPT	1/2, 3/4
Weight		0.47 kg (1.04 lbs)


* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

Materials of Construction


Body	Aluminum	
Body Cap	ABS	
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Aluminum
Seals	Nitrile	
Sight Dome	Polycarbonate	
Sight Gauge	Metal Bowl	Polycarbonate
Suggested Lubricant	ISO / ASTM VG32	
Pick-up Filter	Sintered Bronze	

Flow Charts


1/2 Lubricator

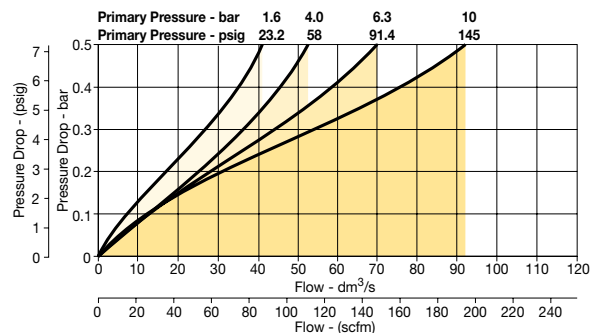

3/4 Lubricator

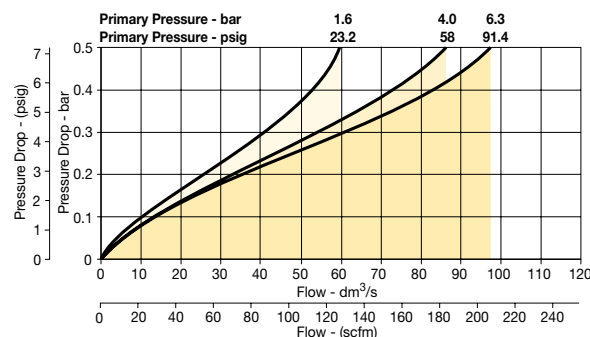

Dimensions mm (inches)

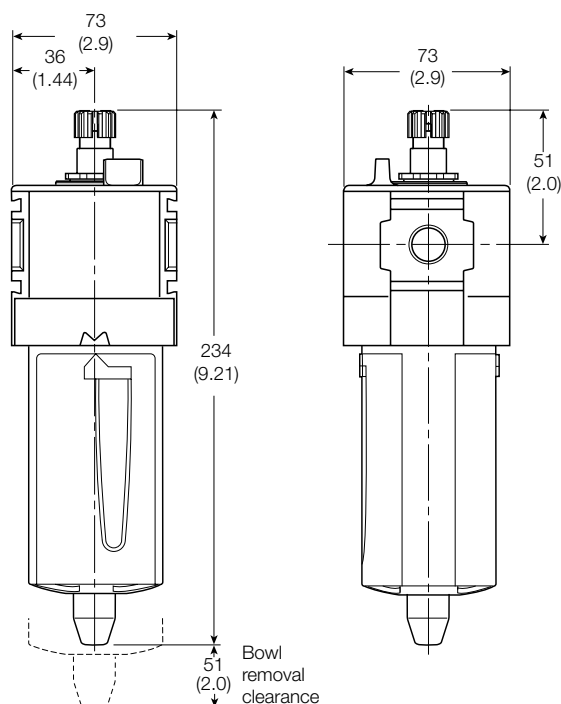

Repair and Service Kits

Plastic bowl / Bowl guard no drain	P33KA00BGN
Drip control assembly	P32KA00PG
Fill plug	P32KA00PL
L-Bracket (fits to body)	P33KA00ML
T-Bracket (fits to body connector)	P32KA00MB
T-Bracket with body connector	P32KA00MT
Body connector	P32KA00CB

Suggested Lubricant F442 Oil

Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F)
(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Global Air Preparation System



P31P Series
Bottom exhaust



P32P Series
Bottom exhaust

- Very fast response times
- Accurate output pressure
- Micro parameter settings
- Selectable I/O parameters
- Quick, full flow exhaust
- LED display indicates output pressure
- No air consumption in steady state
- Multiple mounting options
- Protection to IP65
- P31P flows to 19 dm³/s (40 scfm)
- P32P flows to 57 dm³/s (120 scfm)

Order Key

P 3	P A	1	A
------------	------------	----------	----------

Body size	
Global Mini (1/4")	1
Global Compact (1/2")	2

Thread type	
BSPP	1
BSPT	2
NPT	9

Port size	
Global Mini (1/4")	2
Global Compact (1/2")	4

Version	
Bottom ported exhaust (NC)	A
Bottom ported forced exhaust (NO)*	E

Pressure range	
0 - 2 bar (0-29 psig)	Z
0 - 10 bar (0-145 psig)	D

Power supply	
24 volts	2

Control signal	
0-10 V [†]	V

[†] Factory setting is 0-10 V control signal. 4-20 mA control signal available via parameter 4 on keypad.

Output signal	
Digital, PNP	D
PNP or 0-10V	P
NPN or 0-10V	N
4-20mA fixed	M


D) Digital PNP output only, no analog output selectable
P) Digital PNP and analogue 0-10V outputs selectable, by means of parameter 6. (Factory default 0-10V)
N) Digital NPN and analogue 0-10 V outputs selectable by means of parameter 6. (Factory default 0-10V)
M) Analog 4-20mA output only.
Note: On all analog outputs the F.S. value can be adjusted by means of parameter 8

Input connector	
M12 (4 pin)	1


* When the supply voltage is lost the unit will automatically exhaust the regulated pressure to 0 bar (atmospheric pressure)

P31P Mounting brackets

Order Code	Description
P3HKA00ML	L-Bracket mounting kit
P3HKA00MC	Foot bracket mounting kit




L-Bracket




Foot Bracket

P32P Mounting brackets

Order Code	Description
P3KKA00ML	L-Bracket mounting kit
P3KKA00MC	Foot bracket mounting kit



L-Bracket



Foot Bracket

Cables

Order Code	Description
CB-M12-4P-2M	2 mtr. cable with moulded straight M12x1 connector

Note:

These brackets fit both Proportional Regulators and Combined Soft Start & Dump Valves.

Global Air Preparation System

Technical Information

Working medium

Compressed air or inert gasses, filtered to 40µ.

Supply pressure

Max. Operating Pressure:
2 bar unit:..... 3 bar (43.5 psig)
10 bar unit: 10.5 bar (152 psig)
Min. Operating Pressure P2 Pressure + 0.5 bar (7.3 psig)

Pressure control range

Available in three pressure ranges, 0-2 bar (0-29 psig), 0-7 bar (0-101.5 psig) or 0-10 bar (0-145 psig). Pressure range can be changed through the software at all times. (parameter 19)

Temperature range

0°C up to +50°C (32°F up to 122°F)

Weights:

P31P = 0.291 kg (0.64 lbs)
P32P = 0.645 kg (1.42 lbs)

Air consumption

No consumption in stable regulated situation.

Display

The regulator is provided with a digital display, indicating the output pressure, either in bar or psig. The factory setting is as indicated on the label, can be changed through to software at all times (parameter 14)

Supply voltage

24 VDC +/- 10%

Power consumption

Max. 1.1W with unloaded signal outputs

Control signals

The electronic pressure regulator can be externally controlled through an analogue control signal of either 0-10V or 4-20mA. (parameter 4).

Output signals

As soon as the output pressure is within the signal band a signal is given of 24VDC, PNP Ri = 1 kOhm
Outside the signal band this connection is 0V.


Connections

(In case of output signal (Option D)

Central M12 connector 4-pole
The electrical connections are as follows:

	Pin No.	Function	Color
1	24 V	Supply	Brown
2	0 to 10 V	Control Signal Ri = 100k Ω	White
	4 to 20mA	Control Signal Ri = 500 Ω	
3	0 V (GND)	Supply	Blue
4	24 V	Alarm Output Signal	Black

Schematic

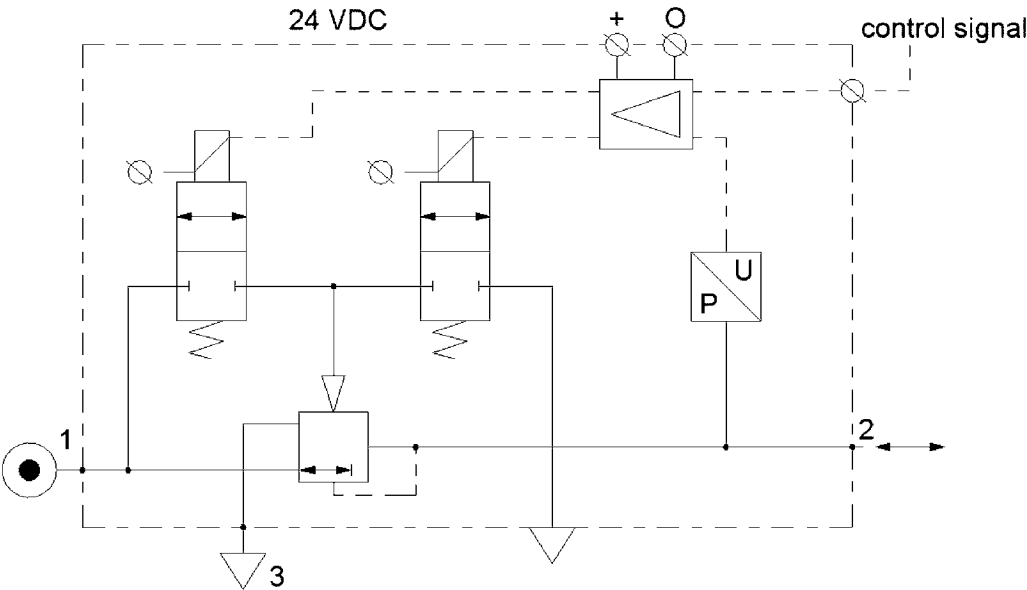

Global Air Preparation System

Technical information

Dead band

The dead band is preset at 1.3% of Full Scale*, adjustable via parameter 13.

Accuracy

Linearity: = < 0.3% of Full Scale.*

Proportional band

The proportional band is preset at 10% of Full Scale.*

Fail safe operation

- If the P31P / P32P unit has an "O" or "A" in the 12th digit of the model number
 - When the supply voltage drops, the electronic control reverts to the fail safe mode. The last known output pressure is maintained at approximately the same level depending upon air consumption. The digital display indicates the last known pressure setting.
 - When the supply voltage is reinstated to the correct level, the valve moves from the fail safe mode and the output pressure immediately follows the control signal requirement. The display indicates the actual output pressure.
 - Note: In the event of loss of both power and inlet pressure the unit will exhaust downstream pressure.
- If the P31P / P32P unit has an "E" in the 12th digit of the model number
 - When the supply voltage drops, the electronic control reverts to "Forced Exhaust Mode" and will automatically exhaust the downstream (regulated) pressure.
 - When the supply voltage is reinstated to the correct level the unit will return to normal operation and follows the control signal requirement. The display indicates the actual pressure.
- If the unit has been programmed in manual mode (not with a control signal) the unit will EXHAUST and the regulator will need to be reset when power is applied.

Full exhaust

Complete exhaust of the regulator is defined as

$P_2 \leq 1\%$ Full Scale

* Full scale (F.S.)

For 2 bar (29 psig) versions this will be 2 bar (29 psig), for the 10 bar (145 psig) version full scale will be 10 bar (145 psig).

Degree of protection

IP65

EU conformity

CE: standard

EMC: according to directive 89/336/EEC

The new pressure regulator is in accordance with:

EN 61000-6-1:2001

EN 61000-6-2:2001

EN 61000-6-3:2001

EN 61000-6-4:2001

These standards ensure that this unit meets the highest level of EMC protection.

Mounting position

Preferably vertical, with the cable gland on top.

Materials: P31P & P32P

- Magnet Core Steel
- Solenoid Valve Poppet FPM
- Solenoid Valve Housing Techno Polymer
- Regulator Body (P31P & P32P versions) Aluminium
- Regulator Top Housing Nylon
- Valve Head Brass & NBR
- Remaining Seals NBR

Advanced functionality

Pilot valve protection

When the required output pressure can not be achieved because of a lack of input pressure the unit will open fully and will display NoP. Approximately every 10 seconds the unit will retry. The output pressure will then be approximately equal to the inlet pressure. As soon as the input pressure is back on the required level, the normal control function follows.

Safety exhaust

Should the **control signal** fall below 0.1 volts the valve will automatically dump downstream system pressure.

Input protection

The unit has built-in protection against failure and burnout resulting from incorrect input value, typically:

The 24VDC supply is incorrectly connected to the setpoint input, the display will show 'OL', as an overload indication. The unit will need to be rewired and when correctly connected will operate normally.

The overload indicator 'OL' will also appear should the wrong input value be applied or the wrong input value be programmed: 4 - 20m instead of 0 - 10V. To correct this a different set point value should be input or the unit reprogrammed to correct the set point value acceptance. (via parameter 4).

Response time	P31P	P32P
2 to 4 bar	25 msecs	35 msecs
1 to 6 bar	55 msecs	135 msecs
4 to 2 bar	70 msecs	85 msecs
6 to 1 bar	80 msecs	225 msecs

To fill volume of:

100cm³ - P31P

330cm³ - P32P


connected to the outlet of the regulator.

Settings


The regulator is pre-set at the factory. If required, adjustments can be made.

Flow Charts

P31P Regulator 1/4" Ports

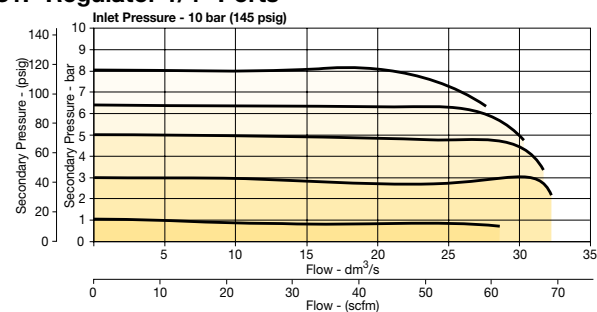

P32P Regulator 1/2" Ports

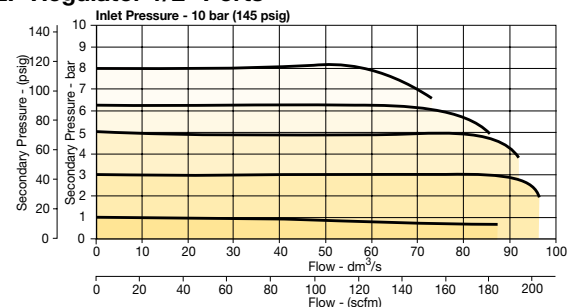

Global Air Preparation System

How to change parameters

Pressing the Accept key “acc” for more than 3 seconds, will activate parameter change mode. The user can then select the parameters by pressing up or down key. (display will show Pxx). When parameter number is correct, pressing accept again will enter parameter number. (display will show parameter value).

Pressing the up or down key will change the parameter itself. (display will flash indicating parameter editing mode). Pressing the accept key will accept the new parameter value. (all digits will flash whilst being accepted).

After releasing all keys, the next parameter number will be presented on the display. (you may step to the next parameter). When no key is pressed, after 3 seconds the display will show the actual output pressure.

When the unit is initially powered up allow approximately 10 seconds for the unit to “boot-up” before changing parameter settings.

Only parameter numbers 0, 4, 6, 8, 9, 14, 18, 19, 20, 12, 13 and 21 are accessible to edit. All other parameters are fixed.

Manual mode:

When keys DOWN and UP are pressed during startup, (connecting to the 24V power supply) manual mode is activated. This means that the user is able to in/decrease the output pressure of the regulator, by pressing the UP or DOWN key. During this action the display will blink, indicating that the manual mode is activated. After powering up again, the unit will revert back to normal mode.















Back to Factory Setting

After start up. (Power is on)

Entering this value in parameter 0 will store the calibrated factory data into the working parameters.

(Default calibration data is used)















Parameter Number 0 – Reset Back to Factory Settings

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 0.	Displays current parameter value.	Edits parameter. 3 = standard factory settings. If other than 3, use Up or Down Arrow and accept 3	Accepts and saves new parameter setting.	Sequences to next parameter.

Set Control Signal

The unit is factory set for 0-10 V control signal. If 4-20 mA control signal is required, change parameter 4.

Parameter Number 4 – Set Control Signal in Volts or Milliamps

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 4.	Displays current parameter value. 1 = V 0 = mA	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

Global Air Preparation System

Set Output Signal

Parameter 6 is used to set the type of output signal to your PLC.

This parameter is used as follows:

Output Signal option "0" = Digital Output – PNP

- Factory set at "0" Non Adjustable

Output Signal option "P" = Digital PNP or Analog 1-10V

- Factory set at "1" for Analog Signal
- Convert to Digital PNP by changing parameter to "0" setting















Output Signal option "N" = Digital NPN or Analog 1-10V

- Factory set at "1" Analog Signal
- Convert to Digital NPN by changing parameter to "0"

Output Signal option "M" = Analog 4-20 mA

- Factory set at "2" Non Adjustable

Parameter Number 6 – Set Output Signal

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal (Value 0, 1 or 2)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 6.	Displays current parameter value. 1 = m factory default for P3H with analog options	Edits parameter. 0 = digital (NPN or PNP) 1 = analog 0..10V 2 = analog 4..20 mA	Accepts and saves new parameter setting.	Sequences to next parameter.















Adjust Span Analog Output Signal

Set value is a % of Full Analog range. As an example for a 0-10V output signal, the original factory setting of 100% will give you an adjustment of 0-10V. If you reset Parameter 8 to 50%, the new output range would be 0-5V or 50% of the full range.

In the event that the output signal is too low, in a certain application, you can adjust it by increasing Parameter 8 to a maximum value of 130% of scale.

Note that all values are nominal and that an actual measurement may be required to ensure signal strength.

Parameter Number 8 – Adjust Span Analog Output Signal













Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal (For 2 bar versions value = 92)	 Flashing Decimal (Value between 0 and 130)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 8.	Displays current parameter value.	Edits parameter.	Accepts and saves new parameter setting and implements the new analog signal span.	Sequences to next parameter.

Global Air Preparation System

Adjust Digital Display

If necessary, adjustments can be made to the digital display when using an external pressure sensor.













Parameter Number 9 – Adjust Digital Display Value (Pressure Calibration)

Step	1	2	3	4	5	
Press 	 3-6 seconds					
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 9.	Displays current digital display	Use up or down arrows and accept to adjust the display value if using an external pressure sensor.	Accepts and saves new parameter setting.	Sequences to next parameter.

Set Pressure Scale

Units with NPT port threads are supplied with a factory set psig pressure scale. Use parameter 14 to change scale to bar.

Parameter Number 14 – Set Pressure Scale in psig or bar















Step	1	2	3	4	5	
Press 	 3-6 seconds					
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 14.	Displays current parameter value. 1 = psig 0 = bar 2 = MPA	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

Global Air Preparation System

Preset Minimum Pressure

If there is a need for a pre-set Minimum pressure, use parameter 18. (Note: preset pressure is affected by % P19.)

Parameter Number 18 – Set Minimum Preset Pressure

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 0 and 200)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 18.	Displays current parameter value. Incremental value is: <u>2 bar unit:</u> x 2 mbar x % P19 <u>10 bar unit:</u> x 10 mbar x % P19	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

Set Pressure Correction















Pressure correction allows the user to set a Maximum pressure as a percentage of secondary pressure F.S.

Example: If F.S. is 10 bar, set parameter 19 to 50 for Maximum preset pressure of 5 bar.

Pressure correction also affects the Minimum preset pressure in parameter 18.

Example: If F.S. is 10 bar and parameter 18 is set to a value of 100 (1 bar), and parameter 19 is set to 50%, then the actual Minimum preset pressure seen is 0.5 bar.

Parameter Number 19 – Set Maximum Preset Pressure

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 0 and 100)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 19.	Displays current parameter value. Incremental value is: % of F.S.	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.













Global Air Preparation System

Behavior Control

The regulation speed of the pressure regulator can be modified by means of one parameter. (P 20)

The value in this parameter has a range from 0-5. A higher value indicates slower regulation speed, but will be more stable.

Parameter Number 20 – Set Behavior Control

Step	1	2	3	4	5	
Press 	 3-6 seconds					
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 0 and 5)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 20.	Displays current parameter value.	Edits parameter 0 = custom set* 1 = fastest (narrow proportional band) 2 = fast 3 = normal 4 = slow 5 = slowest (proportional band is broad)	Accepts and saves new parameter setting.	Sequences to next parameter.













* When the value 0 is entered, you are able to create your own custom settings true parameters 12, 13 and 21.

Fine Settings

Set Proportional Band

Proportional band is used for setting the reaction sensitivity of the regulator. The displayed value is X 10 mbar and has a range between 50 (0.5 bar) and 250 (2.5 bar).

Parameter Number 12 – Set Proportional Band (P20 Must be Set to 0)















Step	1	2	3	4	5	
Press 	 3-6 seconds					
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 50 and 250)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 12.	Displays current parameter value. Incremental value is: x 10 mbar	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

Global Air Preparation System

Set Deadband















Deadband is the Minimum limit of accuracy at which the regulator is set for normal operation. The displayed value is X 10 mbar and has a range between 4 (40 mbar) and 40 (400 mbar).

Parameter Number 13 – Set Deadband (P20 Must be Set to 0)









Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 4 and 40)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 13.	Displays current parameter value. Incremental value is x 10 mbar	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

Proportional Effect


Parameter Number 21 – Set Proportional Effect (P20 Must be Set to 0)

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal (value between 5 and 100)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 21.	Displays current parameter value.	Edits parameter. 5 = fastest regulation 100 = slowest regulation.	Accepts and saves new parameter setting.	Sequences to next parameter.


Parameter Number 39 – Displays Current Software Version

Step	1	2	3	
Press 	 3-6 seconds	 or 		
Until Display Reads			 Flashing Decimal	
Description	Accesses changeable parameters.	Accesses parameter no. 39.	Displays current parameter value. XXX = current software version	


P31P

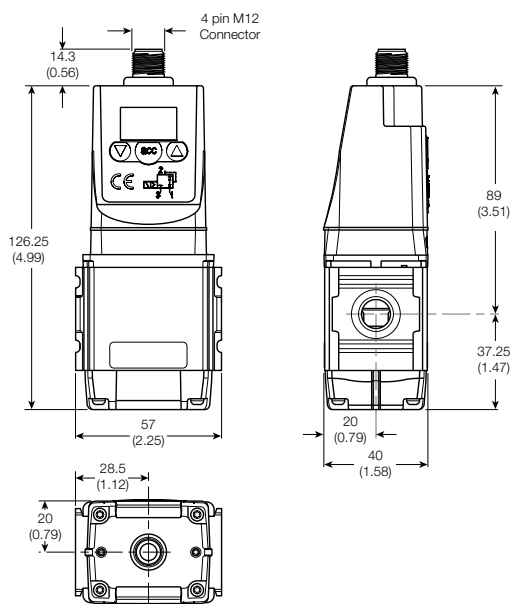


P32P

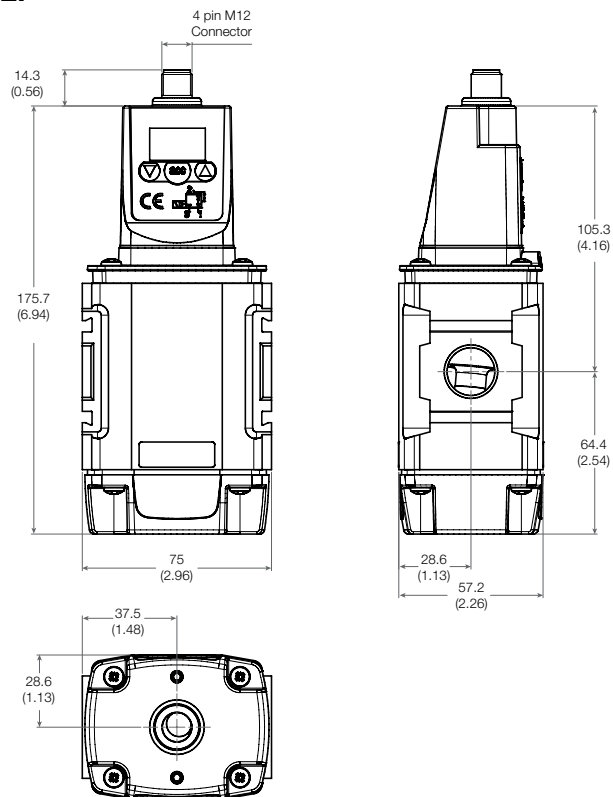


L-Bracket

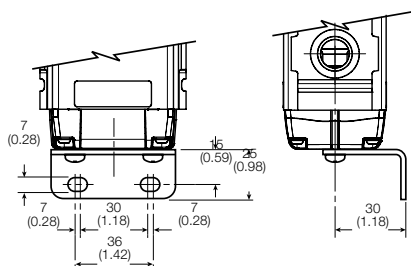


L-Bracket

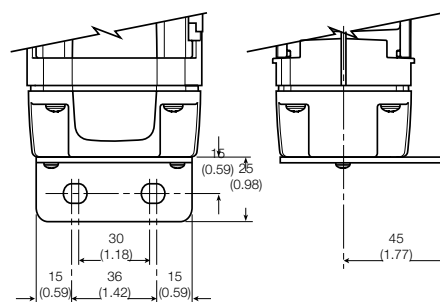

Foot Bracket


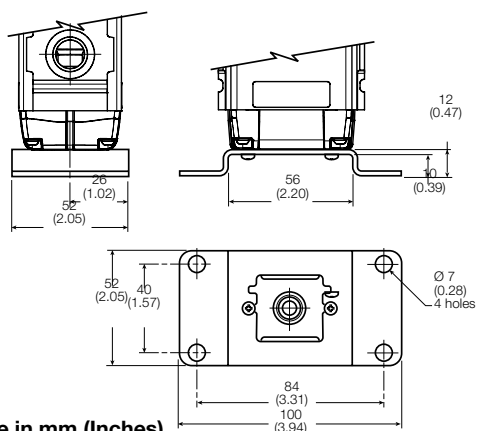


Foot Bracket

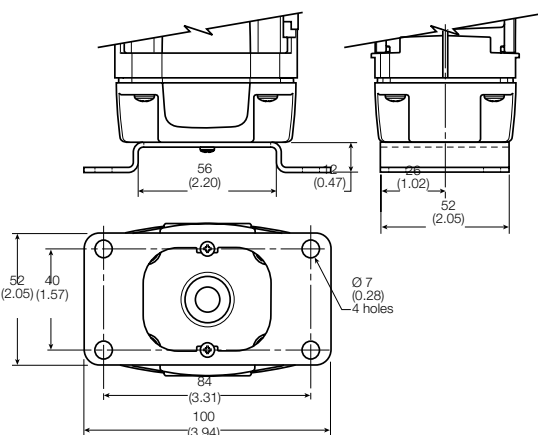

Dimensions are in mm (Inches)

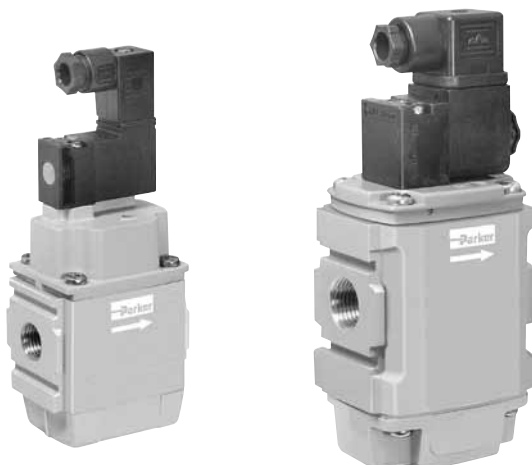

Global Air Preparation System**Combined Soft Start / Dump Valve****Symbols**

- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- Provides for the safe introduction of pressure
- The 3-way, 2-position function automatically dumps downstream pressure on the loss of pilot signal
- Adjustable slow start
- Solenoid or air pilot options
- High flow & exhaust capability
- Silencer included

Parker Global Series Combined Soft Start / Dump Valves, provide for the safe introduction of pressure to machines or systems. Soft Start / Dump Valves when set, allow the pressure to gradually build to the set point before fully opening to deliver full flow at line pressure.

The controlled introduction of pressure can be an important safety factor and prevent damage to tooling when air pressure is introduced at machine or system start up.

To maintain these units in the open position a pilot supply to the air pilot operated version or an electrical signal to the solenoid operated version must be maintained. The valve will automatically dump when the holding signal is removed.

Options:

P 3		T A		N		Solenoid type only	
Body size		Port size		Pilot type			
Mini (1/4")	1	Mini (1/4")	2	External Air Pilot	P	15mm (P31 series only)	C
Compact (1/2")	2	Compact (1/2")	4	Solenoid Pilot	S	30mm CNOMO coil (P32 only)	A
Thread Type		Actuator interface				30mm CNOMO coil (M12 connection) (P32 only)	D
BSPP (G)	1	15mm solenoid (P31 only)	G			24VDC non locking manual override	2CN
BSPT	2	30mm solenoid	C			120VAC non locking manual override	3GN
NPT	9	Threaded air pilot	P			120VAC non locking manual override (P31 series only)	1FN

Note:
P32 unit used for both P32 & P33 series

Compact combined soft start dump valve

Port size	Description	Order Code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	P31TA92SGNC1FN	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	P31TA92SGNC2CN	17 (36)	10 (150)	166‡ (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	External air pilot operated	P31TA92PPN	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug incl.	P32TA94SCNA3GN	46 (97)	10 (150)	162.5‡ (6.3)	88 (3.4)	57.2 (2.2)	0.87kg (1.9lbs)
1/2"	24VDC 30mm coil & cable plug incl.	P32TA94SCNA2CN	46 (97)	10 (150)	227.5‡ (8.9)	88 (3.4)	57.2 (2.2)	0.91kg (2.0lbs)
1/2"	External air pilot operated	P32TA94PPN	46 (97)	17 (250)	162.5‡ (6.3)	75 (2.9)	57.2 (2.2)	0.87kg (1.9lbs)

‡ Includes exhaust silencer. Flow with 6.3 bar (91.3 psig) inlet and 1 bar (14.5 psig) pressure drop.

† **Standard part numbers shown in bold. For other models refer to Options chart above.**



Global Air Preparation System**Technical Information**

Fluid:	Compressed air	
Max. pressure Solenoid operated:	10 bar (150 psig)	
Max. pressure Air Pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* Solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* Air Pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air Pilot port:	1/8"	
Exhaust port:	P31T - 1/4" / P32T - 1/2"	
Typical flow with 6.3 bar inlet pressure and 1 bar pressure drop:	P31T	17 dm ³ /s (36 scfm)
	P32T	48 dm ³ /s (101 scfm)

* Air supply must be dry enough to avoid ice formation at temperatures below +2°C
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

Material Specification


Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

Mounting Brackets




Description	Order code
L-Bracket mounting kit	P3HKA00ML
Foot bracket mounting kit	P3HKA00MC



Note:

For solenoid operators and cable plugs (connectors) see pages 68 to 69.

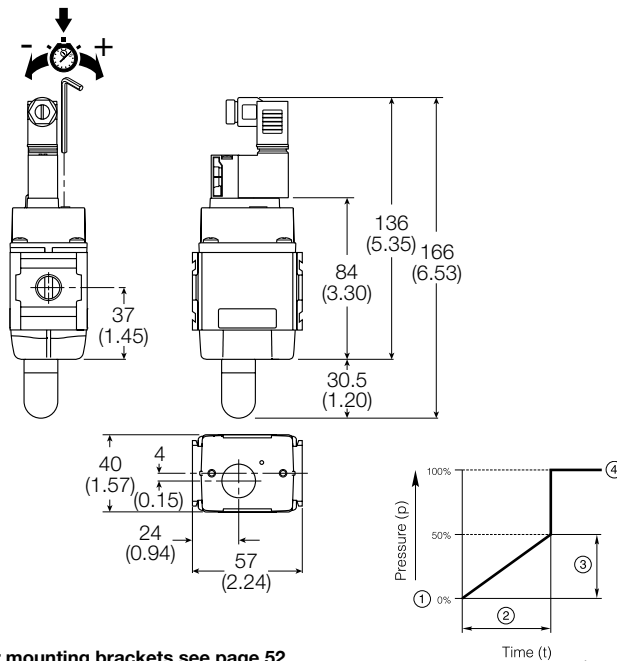Dimensions mm (inches)**P31T**

For mounting brackets see page 52

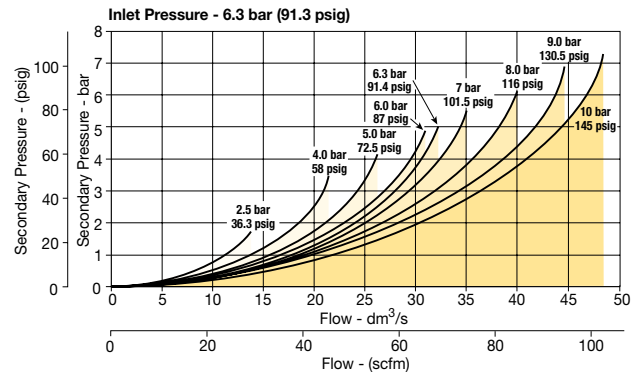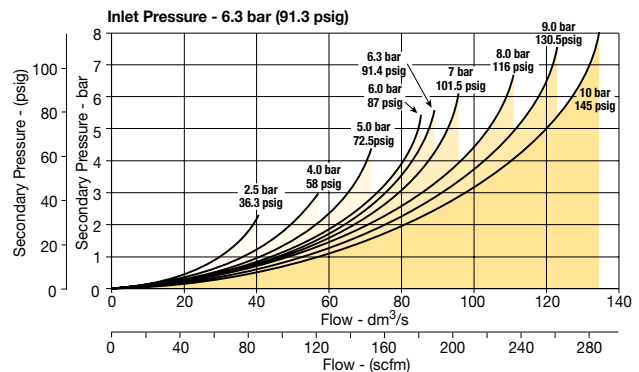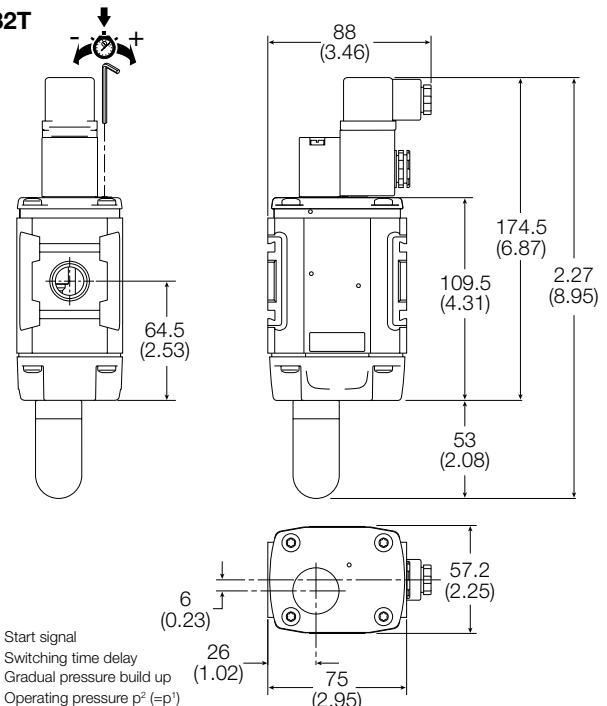Flow characteristics**1/4 Soft Start & Dump Valve****1/2 Soft Start & Dump Valve****P32T**

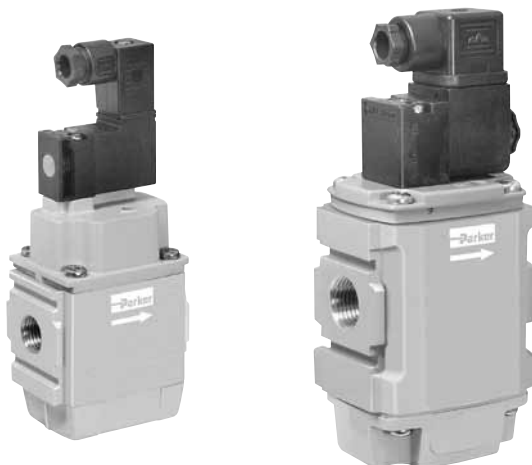Global Air Preparation System**Dump Valve****Symbols**

- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- Provides for the safe introduction of pressure
- The 3-way, 2-position function automatically dumps downstream pressure on the loss of pilot signal
- Solenoid or air pilot options
- High flow & exhaust capability
- Silencer included

Remotely operated dump valves automatically shut off upstream pressure and exhaust the downstream pressure when the pilot pressure is released.

To maintain these units in the open position a pilot supply to the air pilot operated version or an electrical signal to the solenoid operated version must be maintained. The valve will automatically dump when the holding signal is removed.

Options:

P 3				D A				N				Solenoid type only			
Body size		Port size		Pilot type		Actuator interface									
Mini (1/4")	1	Mini (1/4")	2	External Air Pilot	P	15mm solenoid (P31 only)	G	15mm (P31 series only)	C	24VDC non locking manual override	2CN				
Compact (1/2")	2	Compact (1/2")	4	Solenoid Pilot	S	30mm solenoid	C	30mm CNOMO coil (P32 only)	A	120VAC non locking manual override	3GN				
Thread Type						Threaded air pilot	P	30mm CNOMO coil (M12 connection) (P32 only)	D	120VAC non locking manual override (P31 series only)	1FN				
BSPP (G)	1														
BSPT	2														
NPT	9														

Note:
P32 unit used for both P32 & P33 series

Remote operated dump valve

Port size	Description	Order Code†	Flow dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	P31DA92SGNC1FN	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	P31DA92SGNC2CN	17 (36)	10 (150)	166‡ (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	External air pilot operated	P31DA92PPN	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug incl.	P32DA94SCNA3GN	51 (108)	10 (150)	162.5+ (6.3)	75 (2.9)	57.2 (2.2)	0.69kg (1.5lbs)
1/2"	24VDC 30mm coil & cable plug incl.	P32DA94SCNA2CN	51 (108)	10 (150)	227.5+ (8.9)	75 (2.9)	57.2 (2.2)	0.91kg (2.0lbs)
1/2"	External air pilot operated	P32DA94PPN	51 (108)	17 (250)	162.5+ (6.3)	75 (2.9)	57.2 (2.2)	0.87kg (1.9lbs)

‡ Includes exhaust silencer

† Standard part numbers shown in bold. For other models refer to Options chart above.



Global Air Preparation System

Technical Information

Fluid:	Compressed air	
Max. pressure Solenoid operated:	10 bar (150 psig)	
Max. pressure Air Pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* Solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* Air Pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air Pilot port:	1/8"	
Exhaust port:	P31D - 1/4" / P32D - 1/2"	
Typical flow with 6.3 bar inlet pressure and 1 bar pressure drop:	P31D	17 dm ³ /s (36 scfm)
	P32D	51 dm ³ /s (108 scfm)

* Air supply must be dry enough to avoid ice formation at temperatures below +2°C
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

Material Specification

Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

Mounting Brackets


Description	Order code
L-Bracket mounting kit	P3HKA00ML
Foot bracket mounting kit	P3HKA00MC

Note:


For solenoid operators and cable plugs (connectors) see pages 68 to 69.

Dimensions mm (inches)

P31D

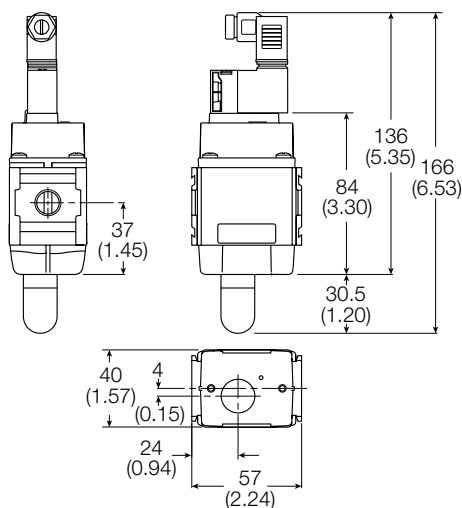


P32D

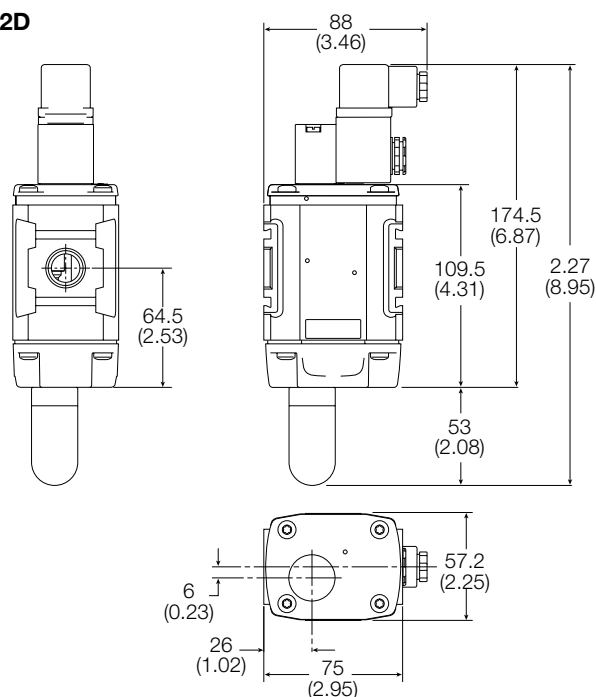


For mounting brackets see page 52


Flow characteristics

1/4 Remote Dump Valve

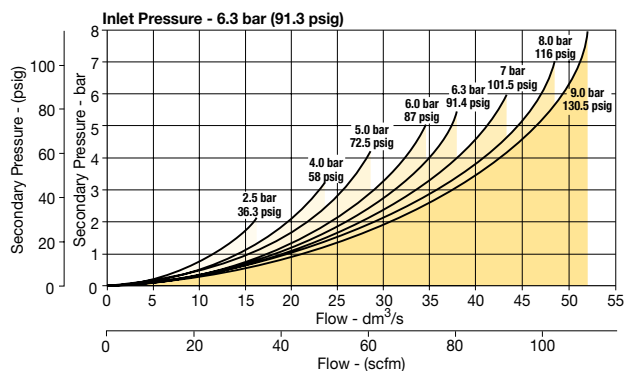

1/2 Remote Dump Valve

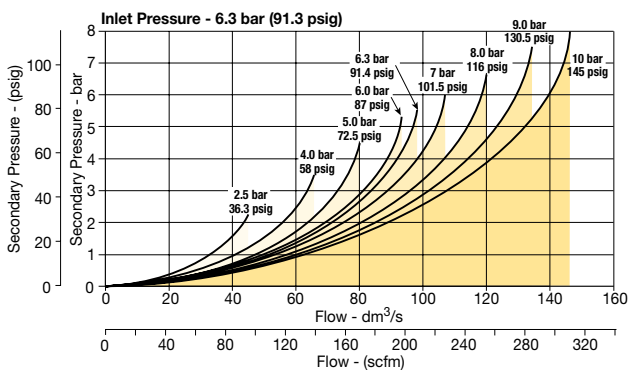

Global Air Preparation System**Soft Start Valve****Symbols**

- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- The 2-way, 2-position function provides for the safe introduction of pressure
- Adjustable slow start
- Solenoid or air pilot options
- High flow

Parker Global Series Soft Start Valves, provide for the safe introduction of pressure to machines or systems. Soft Start Valves, allow the pressure to gradually build to the set point before fully opening to deliver full flow at line pressure.

The controlled introduction of pressure can be an important safety factor and prevent damage to tooling when air pressure is introduced at machine or system start up.

Note: Soft Start Valves must be installed downstream of a 3/2 valve with exhaust capability

Options:

P 3		SA		N		Solenoid type only	
Body size		Port size		Pilot type		Actuator interface	
Mini (1/4")	1	Mini (1/4")	2	External Air Pilot	P	15mm (P31 series only)	C
Compact (1/2")	2	Compact (1/2")	4	Solenoid Pilot	S	30mm CNOMO coil (P32 only)	A
Thread Type				Internal Air Pilot	Y	30mm CNOMO coil (M12 connection) (P32 only)	D
BSPP (G)	1					24VDC non locking manual override	2CN
BSPT	2					120VAC non locking manual override	3GN
NPT	9					120VAC non locking manual override (P31 series only)	1FN

Note:
P32 unit used for both P32 & P33 series

Soft start valve

Port size	Description	Order Code†	Flow dm ³ /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	P31SA92SGNC1FN	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	P31SA92SGNC2CN	17 (36)	10 (150)	166.0 (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	Internal air pilot operated	P31SA92Y0N	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	External air pilot (1/8" threaded)	P31SA92PPN	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug incl.	P32SA94SCNA3GN	48 (101)	10 (150)	162.5 (6.3)	88 (3.4)	57.2 (2.28)	0.87kg (1.5lbs)
1/2"	24VDC 30mm coil & cable plug	P32SA94SCNA2CN	48 (101)	10 (150)	227.5 (8.9)	88 (3.4)	57.2 (2.28)	0.90kg (2.0lbs)
1/2"	Internal air pilot operated	P32SA94Y0N	48 (101)	17 (250)	162.5 (6.3)	75 (2.9)	57.2 (2.28)	0.90kg (2.0lbs)
1/2"	External air pilot (1/8" threaded)	P32SA94PPN	48 (101)	17 (250)	162.5 (6.3)	75 (2.9)	57.2 (2.28)	0.87kg (1.5lbs)

† Standard part numbers shown in bold. For other models refer to Options chart above.

Global Air Preparation System**Technical Information**

Fluid:	Compressed air	
Max. pressure Solenoid operated:	10 bar (150 psig)	
Max. pressure Air Pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* Solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* Air Pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air Pilot port:	1/8"	
Typical flow with 6.3bar inlet pressure and 1 bar pressure drop:	P31S	17 dm ³ /s (36 scfm)
	P32S	48 dm ³ /s (101 scfm)

* Air supply must be dry enough to avoid ice formation at temperatures below +2°C
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

Material Specification





Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

Mounting Brackets

Description	Order code
	P31S
L-Bracket mounting kit	P3HKA00ML
Foot bracket mounting kit	P3HKA00MC

Note:

For solenoid operators and cable plugs (connectors) see pages 68 to 69.

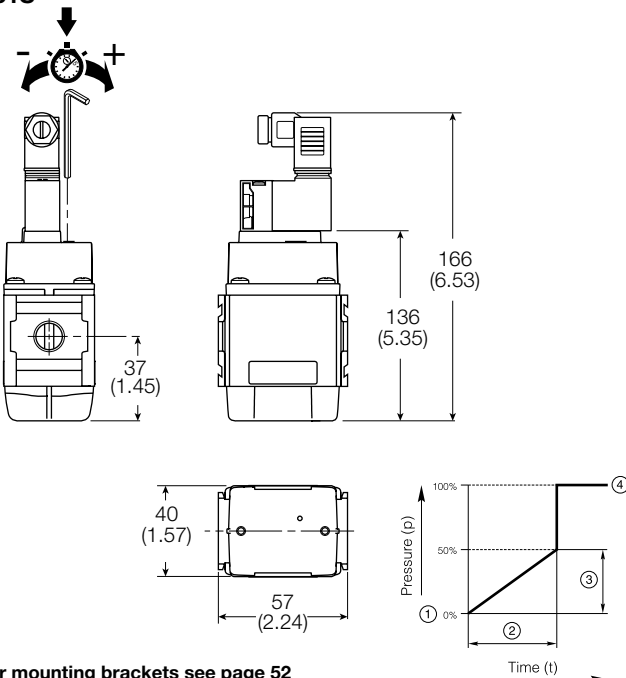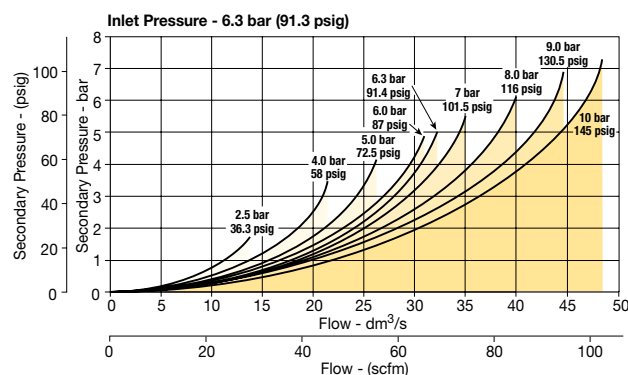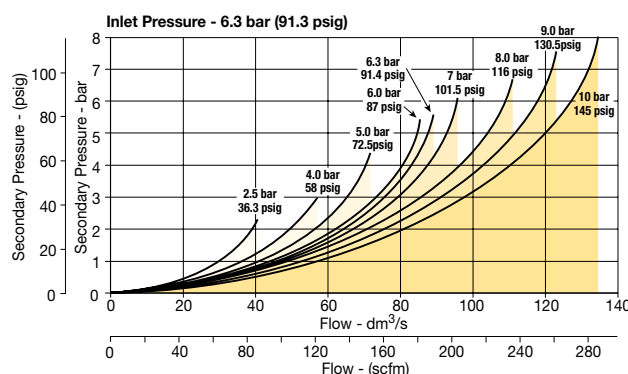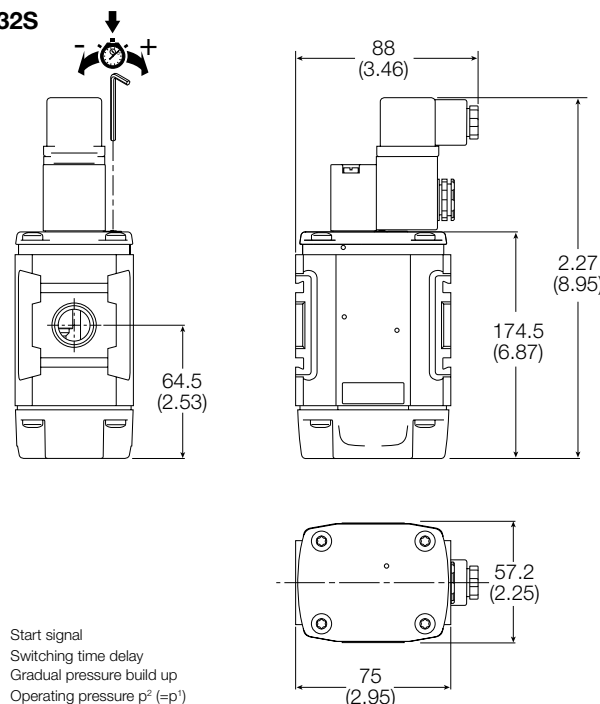Dimensions mm (inches)**P31S****Flow characteristics****1/4 Soft Start Valve****1/2 Soft Start Valve****P32S**

Global Air Preparation System

Solenoid Operator - CNOMO

Technical data -
Solenoid operators, coil combinations

	NC Normal Operator with 15mm standard coil	NC Normal Operator with 22 x 30 standard coil	NC Normal Operator with 30 x 30 standard coil
Working pressure	0 to 10 bar	0 to 10 bar	0 to 10 bar
Ambient temperature	-15°C to 60°C *	-10°C to 60°C *	-10°C to 60°C *
Power (DC)	1.2W	4.8W	2.7W
Power (AC)	1.6VA	8.5VA	4.9VA
Voltage tolerance	+10%/-15%	+/-10%	+/-10%
Duty cycle	100%	100%	100%
Insulation class	F	F	F
Electric connection	ISO 15217	B Industrial	DIN 43650A
Protection	IP65	IP65	IP65
Approval	UL/CSA		UL/CSA
Working media	All neutral media such as compressed air and inert gases.		

* limited to 50°C if use with 100% duty cycle

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the Maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors/cable plugs EN175301-803 with LED's include this type of circuit protection.

Materials


Pilot Valve

Body:	Polyamide
Armature tube:	Brass
Plunger & core:	Corrosion resistant Cr-Ni steel
Seals:	Fluorocarbon
Screws:	Stainless steel

Coil


Encapsulation material:	Thermoplastic as standard Duroplast for M12 connection
-------------------------	---

P31 Series only - Solenoid coils 15mm NC

	Voltage	Order code Override, blue, non locking flush	Weight (Kg)
	24VDC	PS2982B49P	0.038
	115VAC 50Hz / 120VAC 60Hz	PS2982B53P	0.038


Spare solenoid operators

Base Solenoid pilot operator CNOMO NC


	Description	Order code Non-lock manual override	Weight (Kg)
	Standard Duty	P2FP23N4B	0.065
	No Override	P2FP23N4A	0.065

Note: Solenoid pilot operators are fitted to the Global range. Order the above part numbers for spares. The operators are supplied with mounting screws and interface 'O' rings.
Coils and connectors must be ordered separately.

Solenoid coils with M12 connection



	Voltage	Order code	Weight (Kg)
	Direct current		
	24VDC	P2FC6449	0.065

Solenoid coils with Din A or Industrial B connection

	Voltage	22mm x 30mm Order code B Industrial Standard	Weight (Kg)	30mm x 30mm Order code DIN 43650A Standard	Weight (Kg)
	Direct current				
	24VDC	P2FCB449	0.093	P2FCA449	0.105
	Alternative current				
	110V 50Hz, 120V 60Hz	P2FCB453	0.093	P2FCA453	0.105



Global Air Preparation System

Solenoid connectors / Cable plugs EN175301-803



	Description	Order code 15mm Form C ISO15217	Order code 22mm Form B Industrial	Order code 30mm Form A DIN 43650A
With standard screw 	Standard IP65 without flying lead	PS2932BP	PS2429BP	PS2028BP
	With LED and protection 24VAC/DC	PS294679BP	PS243079BP	PS203279BP
	With LED and protection 110VAC	PS294683BP	PS243083BP	PS203283BP
With cable 	Standard with 2m cable IP65	PS2932JBP	PS2429JBP	PS2028JCP
	24VAC/DC, 2m cable LED and protection IP65	PS2946J79BP	PS2430J79BP	PS2032J79CP
	110VAC/DC, 2m cable LED and protection IP65	PS2946J83BP	PS2430J83BP	PS2032J83CP

Solenoid coil

Dimensions mm (inches)

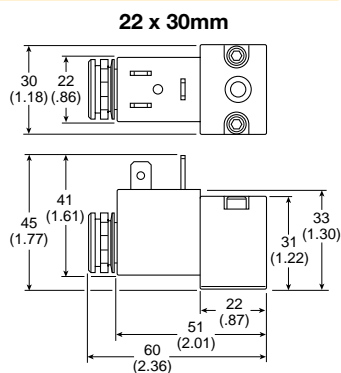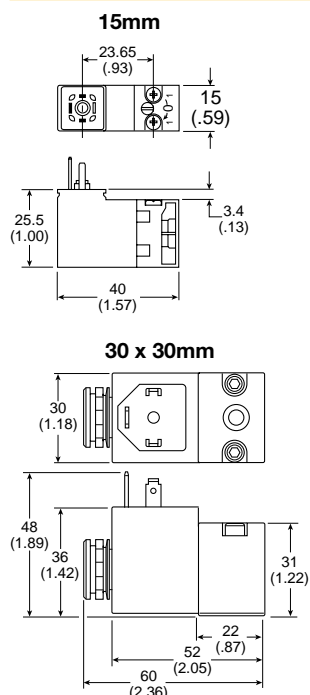




Electrical schematics





PS2028BP	PS243079BP	PS203279BP
PS2028JCP	PS2430J79BP	PS2032J79CP
PS2429BP	PS243083BP	PS203283BP
PS2429JBP	PS2430J83BP	PS2032J83CP
PS2932BP	PS294679BP	PS294683BP
PS2932JBP	PS2946J79BP	PS2946J83BP

Cable plug

Dimensions mm (inches)

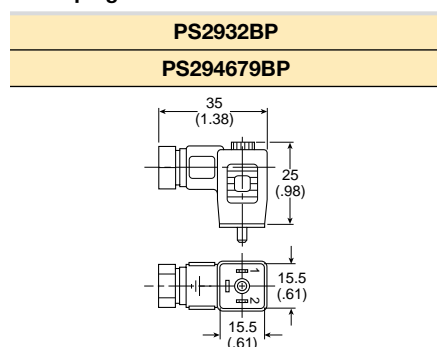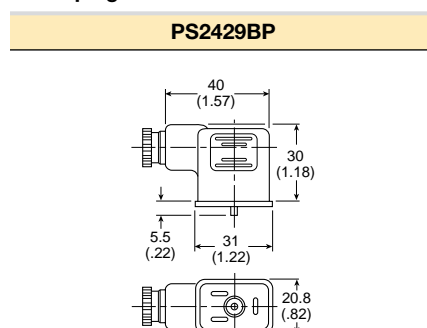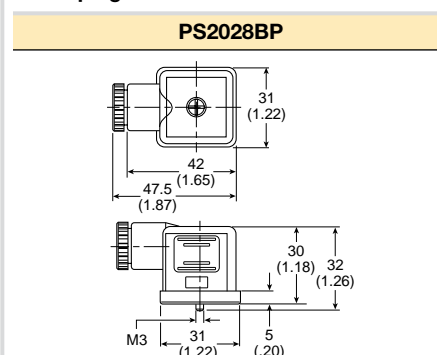15mm ISO 15217
Cable plugs22mm Form B Industrial
Cable plugs30mm DIN 43650A
Cable plugs

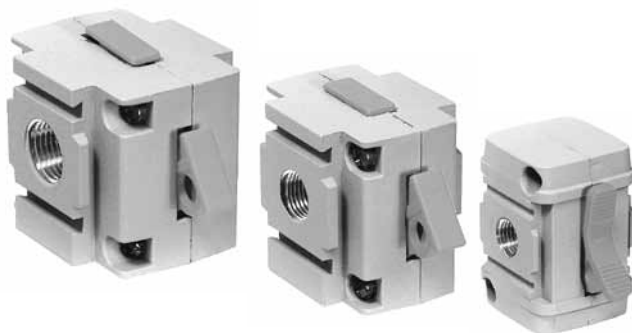Global Air Preparation System**Safety Lockout Valves****Features**

- The Safety Lockout valve is a manually operated, slide-type, 2-position, 3-way valve. In the closed position, downstream air pressure is exhausted to atmosphere.
- The valve slide can be locked in the closed position with a customer supplied padlock.
- The Safety Lockout valves conform to OSHA #29 CFR part 1910 – control of hazardous energy source (lockout / tagout).
- Left to right flow — orange slide
- Right to left — yellow slide

Ordering Information

Model type	Port size	Thread type	Flow dm ³ /s (scfm)	Safety Lockout Valve Flow from left to right	Safety Lockout Valve Flow from right to left
P31	1/4"	NPT	47.2 (100)	P31VA92LSAN	—
P32	1/4"	NPT	66.5 (141)	P32VA92LSAN	P32VA92LSBN
	3/8"	NPT	101.9 (216)	P32VA93LSAN	P32VA93LSBN
	1/2"	NPT	128.4 (272)	P32VA94LSAN	P32VA94LSBN
P33	1/2"	NPT	136.9 (290)	P33VA94LSAN	P33VA94LSBN
	3/4"	NPT	141.6 (300)	P33VA96LSAN	P33VA96LSBN




For thread type: BSPP **1**
 BSPT **2**
 NPT **9**


Materials of Construction

Body	Zinc
Blade	Acetal
Seals	Nitrile

Specifications

Operating temperature	P31: -10°C to 65.5°C (14°F to 150°F) P32/P33: -25°C to 65.5°C (-13°F to 150°F)
Max. supply pressure	10 bar (150 psig)
Port size	BSPP / BSPT / NPT 1/4, 3/8, 1/2, 3/4
Weight	P31: 0.30 kg (0.66 lbs) P32: 0.34 kg (0.74 lbs) P33: 0.41 kg (0.90 lbs)

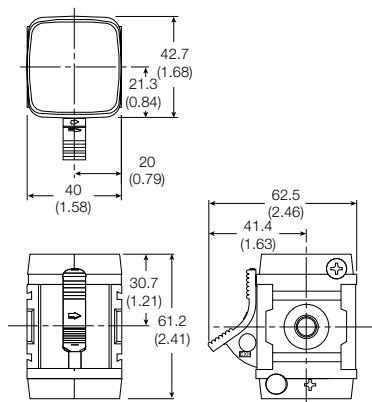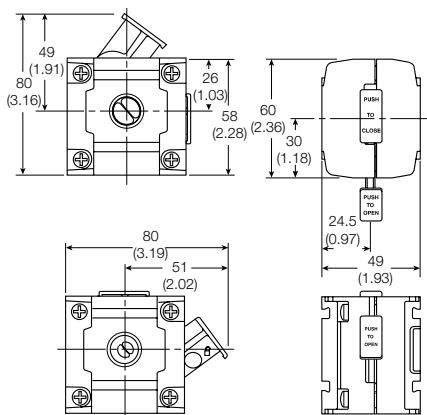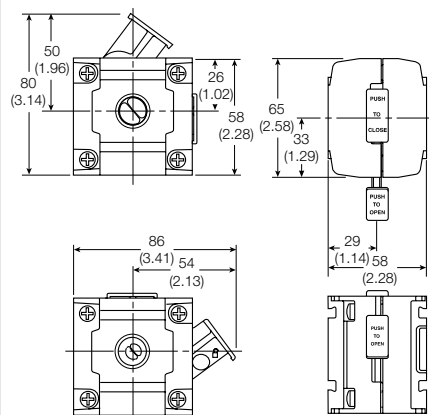Dimensions mm (inches)**P31****P32****P33**

Global Air Preparation System**Modular Ball Valves****Features**

The Modular Ball Valves provide shut off line pressure with a non-sticking 90° turn handle to prevent unauthorised adjustment. When the inlet pressure is turned off the downstream air pressure vents through the exhaust port. The padlock slide may be assembled on either side. It is recommended that this is assembled after mounting.

Note: This padlock slide is a permanent assembly and may not be removed later

Ordering Information

Model type	Port size	Exhaust port	Thread type	Flow dm ³ /s (scfm)	Modular ball valve flow from left to right
P31	1/4"	1/4"	NPT	20 (42.4)	P31VA92LBNN
P32	3/8"	1/4"	NPT	90 (190.7)	P32VA93LBNN
	1/2"	1/4"	NPT	122 (258.5)	P32VA94LBNN
P33	1/2"	1/2"	NPT	265 (561.5)	P33VA94LBNN
	3/4"	1/2"	NPT	320 (678)	P33VA96LBNN




For thread type: BSPP **1**
BSPT **2**
NPT **9**


Specifications

Operating temperature	-20°C to 80°C (-4°F to 176°F)	
Max. supply pressure	17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2, 3/4
Weight	P31:	0.19 kg (0.41 lbs)
	P32:	0.47 kg (1.00 lbs)
	P33:	0.80 kg (1.70 lbs)

Materials of Construction

Body	Aluminum	
Seals	PTFE	
Ball	P31	Brass
	P32 / P33	Chrome plated brass

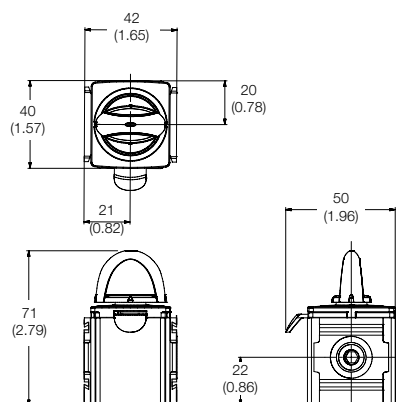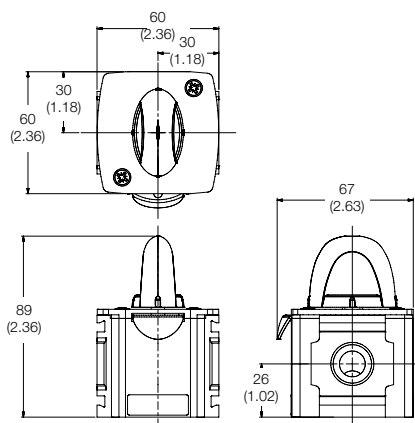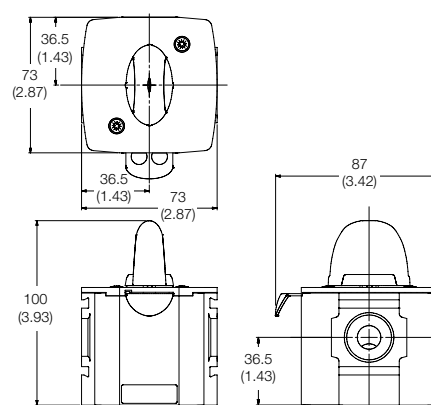Dimensions mm (inches)**P31****P32****P33**

Global Air Preparation System**Manifold Blocks****Features**

- Available in 1/4" or 3/4" threaded inlet / outlet ports
- Two additional top and bottom auxiliary ports standard
- Can be mounted anywhere in the FRL system
- Includes one pipe plug

Ordering Information

Model type	In / Out port size	Auxiliary port size top	Auxiliary port size bottom	Thread type	Order Code
P31	1/4"	1/4"	1/4"	NPT	P31MA92022N
P32	1/2"	1/4"	1/2"	NPT	P32MA94024N
P33	3/4"	1/4"	1/2"	NPT	P33MA96024N

For thread type:

BSPP **1**

BSPT **2**

NPT **9**

Specifications


Operating temperature	-40°C to 65.5°C (-40°F to 150°F)	
Max. supply pressure	20.7 bar (300 psig)	
Weight	P31:	0.19 kg (0.26 lbs)
	P33:	0.34 kg (0.42 lbs)

Materials of Construction

Body Aluminum


Note:

P33 unit used for both P32 & P33 series

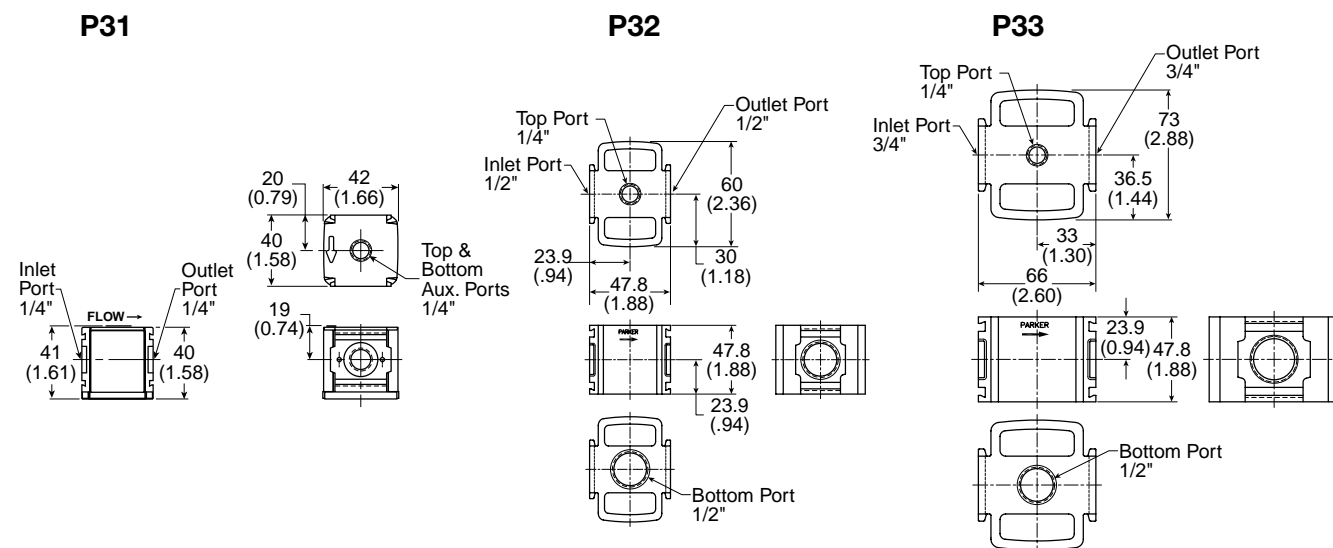
Dimensions mm (inches)

Global Air Preparation System**Accessories - P31 Series****C-Bracket**


(Fits to filter and lubricator body)

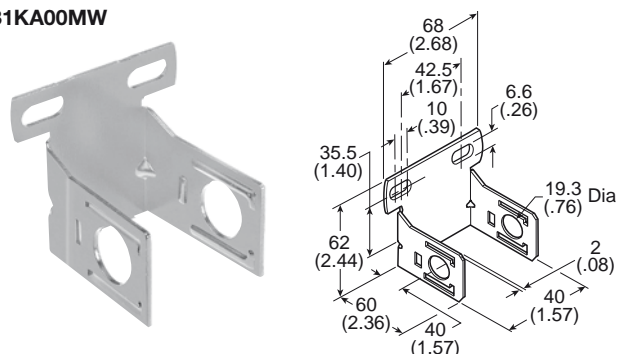P31KA00MW**T-Bracket w/ Body Connector**

(O-ring not shown)

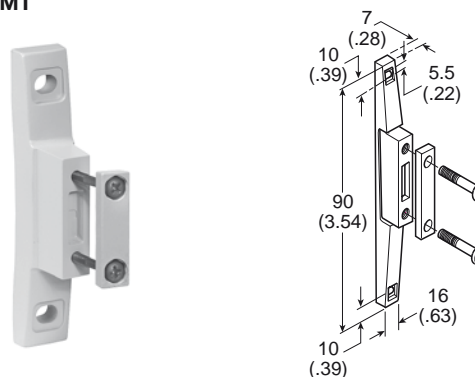P31KA00MT**Body Connector**

(O-ring not shown)

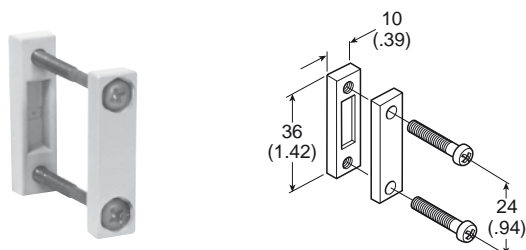P31KA00CB**Port Block Kit**

(O-ring not shown)

1/8 NPT	P31KA91CP	1/8 BSPT	P31KA21CP
1/4 NPT	P31KA92CP	1/4 BSPT	P31KA22CP
3/8 NPT	P31KA93CP	3/8 BSPT	P31KA23CP
1/8 BSPP	P31KA11CP		
1/4 BSPP	P31KA12CP		
3/8 BSPP	P31KA13CP		


**Port Block Kit w/ T-Bracket**



(O-ring not shown)

1/8 NPT	P31KA91CN	1/8 BSPT	P31KA21CN
1/4 NPT	P31KA92CN	1/4 BSPT	P31KA22CN
3/8 NPT	P31KA93CN	3/8 BSPT	P31KA23CN
1/8 BSPP	P31KA11CN		
1/4 BSPP	P31KA12CN		
3/8 BSPP	P31KA13CN		




**Angle Bracket**



(Fits to regulator and filter/regulator body)

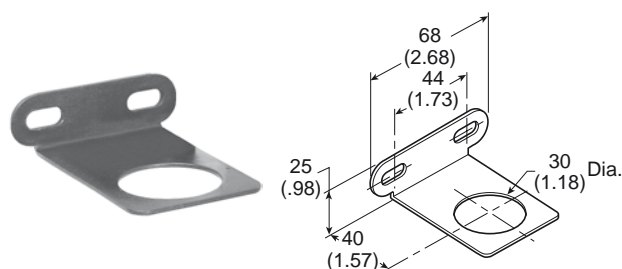P31KA00MR

Global Air Preparation System**Accessories - P32 Series****T-Bracket w/ Body Connector****P32KA00MT****Body Connector****P32KA00CB****Port Block Kit**




1/4 NPT.....	P32KA92CP	1/4 BSPT	P32KA22CP
3/8 NPT.....	P32KA93CP	3/8 BSPT	P32KA23CP
1/2 NPT.....	P32KA94CP	1/2 BSPT	P32KA24CP
3/4 NPT.....	P32KA96CP	3/4 BSPT	P32KA26CP
1/4 BSPP	P32KA12CP		
3/8 BSPP	P32KA13CP		
1/2 BSPP	P32KA14CP		
3/4 BSPP	P32KA16CP		

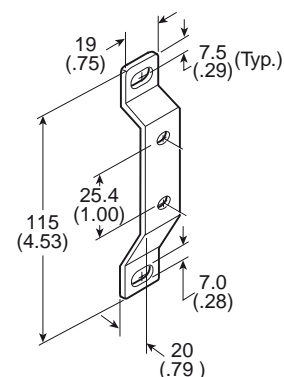**Angle Bracket****(Fits to regulator and filter/regulator bonnet)****P32KA00MR****L-Bracket****(Fits to filter and lubricator body)****P32KA00ML****T-Bracket****(fits to body connector or port block)****P32KA00MB**

Global Air Preparation System**Accessories - P33 Series****T-Bracket w/ Body Connector****P32KA00MT****Body Connector****P32KA00CB****Port Block Kit**

1/4 NPT..... **P32KA92CP**
 3/8 NPT..... **P32KA93CP**
 1/2 NPT..... **P32KA94CP**
 3/4 NPT..... **P32KA96CP**
 1/4 BSPP **P32KA12CP**
 3/8 BSPP **P32KA13CP**
 1/2 BSPP **P32KA14CP**
 3/4 BSPP **P32KA16CP**

1/4 BSPT **P32KA22CP**
 3/8 BSPT **P32KA23CP**
 1/2 BSPT **P32KA24CP**
 3/4 BSPT **P32KA26CP**

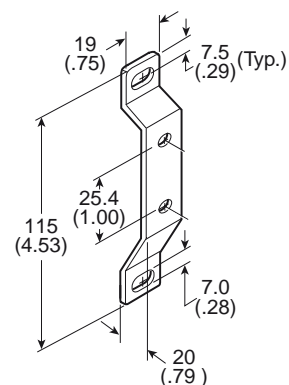**Angle Bracket****(Fits to regulator and filter/regulator bonnet)****P33KA00MR****L-Bracket****(Fits to filter and lubricator body)****P33KA00ML****T-Bracket****(fits to body connector or port block)****P32KA00MB**











Global Air Preparation System

Kits

Series	Description	Order Code	
P31 P32 P33	Panel Mount Nut (Plastic)	P31KA00MP P32KA00MP P33KA00MP	
P31 P32 P33	Panel Mount Nut (Aluminum)	P31KA00MM P32KA00MM P33KA00MM	
P31 P32 P33	5μ Element Kit	P31KA00ESE P32KA00ESE P33KA00ESE	
P31 P32 P33	1μ Element Kit	P31KA00ES9 P32KA00ES9 P33KA00ES9	
P31 P32 P33	0.01μ Element Kit	P31KA00ESC P32KA00ESC P33KA00ESC	
P31 P32 P33	Adsorber Element Kit	P31KA00ESA P32KA00ESA P33KA00ESA	
P32 / P33	Auto Drain Kit	P32KA00DA	
P32 / P33	Differential Pressure Indicator Kit	P32KA00RQ	
P31 P32 / P33	Fill Plug Kit	P31KA00PL P32KA00PL	
P31 / P32 / P33	Drip Control Assembly Kit	P32KA00PG	






Global Air Preparation System

Kits

Series	Description	Order Code	
P31 P32 P33	Plastic Bowl w/ Bowl Guard & Manual Drain	P31KA00BGM P32KA00BGM P33KA00BGM	
P31	Plastic Bowl w/ Bowl Guard & Pulse Drain	P31KA00BGB	
P32 P33	Plastic Bowl w/ Bowl Guard & Auto Drain	P32KA00BGA P33KA00BGA	
P31 P32 P33	Metal Bowl w/o Sight Gauge & Manual Drain	P31KA00BMM P32KA00BMM P33KA00BMM	
P31	Metal Bowl w/o Sight Gauge & Pulse Drain	P31KA00BMB	
P32 P33	Metal Bowl w/o Sight Gauge & Auto Drain	P32KA00BMA P33KA00BMA	
P32 P33	Metal Bowl w/ Sight Gauge & Manual Drain	P32KA00BSM P33KA00BSM	
P32 P33	Metal Bowl w/ Sight Gauge & Auto Drain	P32KA00BSA P33KA00BSA	
P31 P32 P33	Lubricator - Plastic Bowl w/ Bowl Guard No Drain	P31KA00BGN P32KA00BGN P33KA00BGN	
P31 P32 P33	Lubricator - Metal Bowl w/o Sight Gauge No Drain	P31KA00BMN P32KA00BMN P33KA00BMN	
P32 P33	Lubricator - Metal Bowl w/ Sight Gauge No Drain	P32KA00BSN P33KA00BSN	

Global Air Preparation System

Kits

Series	Description	Connection	Order Code	
P31 P32 P33	Regulator - Relieving Repair Kit		P31KA00RB P32KA00RB P33KA00RB	
P31 P32 P33	Regulator - Non Relieving Repair Kit		P31KA00RC P32KA00RC P33KA00RC	
P31 P32 P33	Regulator - Main Adjusting Spring 0-2 bar (0-30 psig) Kit		P31KA00PR P32KA00PR P33KA00PR	
P31 P32 P33	Regulator - Main Adjusting Spring 0-4.1 bar (0-60 psig) Kit		P31KA00PS P32KA00PS P33KA00PS	
P31 P32 P33	Regulator - Main Adjusting Spring 0-8.6 bar (0-125 psig) Kit		P31KA00PT P32KA00PT P33KA00PT	
P32 P33	Regulator - Main Adjusting Spring 0-17 bar (0-250 psig) Kit		P32KA00PV P33KA00PV	
P31	Square Flush Mounting Gauge Kit	0-4 bar 0-10 bar 0-60 psig 0-150 psig	K4511SCR04B K4511SCR11B K4511SCR060 K4511SCR150	
P31	1" Round Gauge	0-60 psig / 0-4.1 bar 1/8" 0-160 psig / 0-10 bar 1/8"	K4510N18060 K4510N18160	
P31	40mm Round Gauge	0-30 psig / 0-2 bar 1/8" 0-60 psig / 0-4.1 bar 1/8" 0-160 psig / 0-10 bar 1/8"	K4515N18030 K4515N18060 K4515N18160	
P32 / P33	50mm Round Gauge	0-30 psig / 0-2 bar 1/4" 0-60 psig / 0-4.1 bar 1/4" 0-160 psig / 0-10 bar 1/4" 0-300 psig / 0-20 bar 1/4"	K4520N14030 K4520N14060 K4520N14160 K4520N14300	
P31 P32 / P33	Body Connector O-ring (Spares kit) (Pack of 4)		P31KA02CY P32KA04CY	

Global Air Preparation System

Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories

WARNING:

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS (“PRODUCTS”) CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:

- Unintended or mistimed cycling or motion of machine members or failure to cycle
- Work pieces or component parts being thrown off at high speeds.
- Failure of a device to function properly for example, failure to clamp or unclamp an associated item or device.
- Explosion
- Suddenly moving or falling objects.
- Release of toxic or otherwise injurious liquids or gasses.

Before selecting or using any of these Products, it is important that you read and follow the instructions below.

1. GENERAL INSTRUCTIONS

- 1.1. Scope: This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.
- 1.2. Fail-Safe: Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.
- 1.3. Relevant International Standards: For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See www.iso.org for ordering information.
- 1.4. Distribution: Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.5. User Responsibility: Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
 - Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
 - Assuring that all user's performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
 - Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
 - Assuring compliance with all applicable government and industry standards.
- 1.6. Safety Devices: Safety devices should not be removed, or defeated.
- 1.7. Warning Labels: Warning labels should not be removed, painted over or otherwise obscured.
- 1.8. Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2. PRODUCT SELECTION INSTRUCTIONS

- 2.1. Flow Rate: The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.
- 2.2. Pressure Rating: Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for Maximum pressure ratings.
- 2.3. Temperature Rating: Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.
- 2.4. Environment: Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.
- 2.5. Lubrication and Compressor Carryover: Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.
- 2.6. Polycarbonate Bowls and Sight Gauges: To avoid potential polycarbonate bowl failures:
 - Do not locate polycarbonate bowls or sight gauges in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
 - Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, ketones, esters or certain alcohols.
 - Do not use polycarbonate bowls or sight gauges in air systems where compressors are lubricated with fire resistant fluids such as phosphate ester and di-ester lubricants.

Global Air Preparation System

- 2.7. Chemical Compatibility: For more information on plastic component chemical compatibility see Pneumatic Division technical bulletins Tec-3, Tec-4, and Tec-5
- 2.8. Product Rupture: Product rupture can cause death, serious personal injury, and property damage.
 - Do not connect pressure regulators or other Pneumatic Division products to bottled gas cylinders.
 - Do not exceed the Maximum primary pressure rating of any pressure regulator or any system component.
 - Consult product labeling or product literature for pressure rating limitations.
3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS
 - 3.1. Component Inspection: Prior to assembly or installation a careful examination of the valves, FRLs or vacuum products must be performed. All components must be checked for correct style, size, and catalog number. DO NOT use any component that displays any signs of nonconformance.
 - 3.2. Installation Instructions: Parker published Installation Instructions must be followed for installation of Parker valves, FRLs and vacuum components. These instructions are provided with every Parker valve or FRL sold, or by calling 1-800-CPARKER, or at www.parker.com.
 - 3.3. Air Supply: The air supply or control medium supplied to Valves, FRLs and Vacuum components must be moisture-free if ambient temperature can drop below freezing
4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS
 - 4.1. Maintenance: Even with proper selection and installation, valve, FRL and vacuum products service life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a component failure, and experience with any known failures in the application or in similar applications should determine the frequency of inspections and the servicing or replacement of Pneumatic Division products so that products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at Minimum, must include instructions 4.2 through 4.10.
 - 4.2. Installation and Service Instructions: Before attempting to service or replace any worn or damaged parts consult the appropriate Service Bulletin for the valve or FRL in question for the appropriate practices to service the unit in question. These Service and Installation Instructions are provided with every Parker valve and FRL sold, or are available by calling 1-800-CPARKER, or by accessing the Parker web site at www.parker.com.
 - 4.3. Lockout / Tagout Procedures: Be sure to follow all required lockout and tagout procedures when servicing equipment. For more information see: OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – (Lockout / Tagout)
 - 4.4. Visual Inspection: Any of the following conditions requires immediate system shut down and replacement of worn or damaged components:
 - Air leakage: Look and listen to see if there are any signs of visual damage to any of the components in the system. Leakage is an indication of worn or damaged components.
 - Damaged or degraded components: Look to see if there are any visible signs of wear or component degradation.
 - Kinked, crushed, or damaged hoses. Kinked hoses can result in restricted air flow and lead to unpredictable system behavior.
 - Any observed improper system or component function: Immediately shut down the system and correct malfunction.
 - Excessive dirt build-up: Dirt and clutter can mask potentially hazardous situations.
 Caution: Leak detection solutions should be rinsed off after use.
 - 4.5. Routine Maintenance Issues:
 - Remove excessive dirt, grime and clutter from work areas.
 - Make sure all required guards and shields are in place.
 - 4.6. Functional Test: Before initiating automatic operation, operate the system manually to make sure all required functions operate properly and safely.
 - 4.7. Service or Replacement Intervals: It is the user's responsibility to establish appropriate service intervals. Valves, FRLs and vacuum products contain components that age, harden, wear, and otherwise deteriorate over time. Environmental conditions can significantly accelerate this process. Valves, FRLs and vacuum components need to be serviced or replaced on routine intervals. Service intervals need to be established based on:
 - Previous performance experiences.
 - Government and / or industrial standards.
 - When failures could result in unacceptable down time, equipment damage or personal injury risk.
 - 4.8. Servicing or Replacing of any Worn or Damaged Parts: To avoid unpredictable system behavior that can cause death, personal injury and property damage:
 - Follow all government, state and local safety and servicing practices prior to service including but not limited to all OSHA Lockout Tagout procedures (OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – Lockout / Tagout).
 - Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
 - Disconnect air supply and depressurize all air lines connected to system and Pneumatic Division products before installation, service, or conversion.
 - Installation, servicing, and / or conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
 - After installation, servicing, or conversions air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or if the product does not operate properly, do not put product or system into use.
 - Warnings and specifications on the product should not be covered or painted over. If masking is not possible, contact your local representative for replacement labels.
 - 4.9. Putting Serviced System Back into Operation: Follow the guidelines above and all relevant Installation and Maintenance Instructions supplied with the valve FRL or vacuum component to insure proper function of the system.

The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors ("Seller") are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods or work described will be referred to as "Products".

1. Terms and Conditions. Seller's willingness to offer Products, or accept an order for Products, to or from Buyer is subject to these Terms and Conditions or any newer version of the terms and conditions found on-line at www.parker.com/saleterms/. Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document issued by Buyer.

2. Price Adjustments; Payments. Prices stated on Seller's quote or other documentation offered by Seller are valid for 30 days, and do not include any sales, use, or other taxes unless specifically stated. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and is due 30 days from the date of invoice or such other term as required by Seller's Credit Department, after which Buyer shall pay interest on any unpaid invoices at the rate of 1.5% per month or the maximum allowable rate under applicable law.

3. Delivery Dates; Title and Risk; Shipment. All delivery dates are approximate and Seller shall not be responsible for any damages resulting from any delay. Regardless of the manner of shipment, title to any products and risk of loss or damage shall pass to Buyer upon placement of the products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyer's request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.

4. Warranty. Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve months from the date of delivery to Buyer or 2,000 hours of normal use, whichever occurs first. The prices charged for Seller's products are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED HEREUNDER. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

5. Claims; Commencement of Actions. Buyer shall promptly inspect all Products upon delivery. No claims for shortages will be allowed unless reported to the Seller within 10 days of delivery. No other claims against Seller will be allowed unless asserted in writing within 30 days after delivery. Buyer shall notify Seller of any alleged breach of warranty within 30 days after the date the defect is or should have been discovered by Buyer. Any action based upon breach of this agreement or upon any other claim arising out of this sale (other than an action by Seller for an amount due on any invoice) must be commenced within 12 months from the date of the breach without regard to the date breach is discovered.

6. LIMITATION OF LIABILITY. UPON NOTIFICATION, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE. **IN NO EVENT SHALL SELLER BE LIABLE TO BUYER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, EVEN IF SELLER HAS BEEN NEGLIGENT, WHETHER IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**

7. User Responsibility. The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

8. Loss to Buyer's Property. Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Special Tooling. A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

10. Buyer's Obligation; Rights of Seller. To secure payment of all sums due or otherwise, Seller shall retain a security interest in the goods delivered and this agreement shall be deemed a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.

11. Improper use and Indemnity. Buyer shall indemnify, defend, and hold Seller harmless from any claim, liability, damages, lawsuits, and costs (including attorney fees), whether for personal injury, property damage, patent, trademark or copyright

infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, improper application or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Product; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

12. Cancellations and Changes. Orders shall not be subject to cancellation or change by Buyer for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change product features, specifications, designs and availability with notice to Buyer.

13. Limitation on Assignment. Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

14. Force Majeure. Seller does not assume the risk and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure") Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.

15. Waiver and Severability. Failure to enforce any provision of this agreement will not waive that provision nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

16. Termination. Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days written notice of termination. Seller may immediately terminate this agreement, in writing, if Buyer: (a) commits a breach of any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or by a third party (d) makes an assignment for the benefit of creditors, or (e) the dissolves or liquidates all or a majority of its assets.

17. Governing Law. This agreement and the sale and delivery of all Products hereunder shall be deemed to have taken place in and shall be governed and construed in accordance with the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.

18. Indemnity for Infringement of Intellectual Property Rights. Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this Agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

19. Entire Agreement. This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged.

20. Compliance with Law, U. K. Bribery Act and U.S. Foreign Corrupt Practices Act. Buyer agrees to comply with all applicable laws and regulations, including both those of the United Kingdom and the United States of America, and of the country or countries of the Territory in which the Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA") and the U.S. Anti-Kickback Act (the "Anti-Kickback Act"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that they are familiar with the provisions of the U. K. Bribery Act, the FCPA and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer shall not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase products or otherwise benefit the business of Seller.

Parker Worldwide

AE – UAE, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 02 30
parker.switzerland@parker.com

CL – Chile, Santiago
Tel: +56 2 623 1216

CN – China, Shanghai
Tel: +86 21 2899 5000

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK – Hong Kong
Tel: +852 2428 8008

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN – India, Mumbai
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP – Japan, Tokyo
Tel: +(81) 3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

LV – Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG – Singapore
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH – Thailand, Bangkok
Tel: +662 717 8140

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US – USA, Cleveland
Tel: +1 216 896 3000

VE – Venezuela, Caracas
Tel: +58 212 238 5422

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

