



General Industrial
 Air Preparation Products

Liquid
 Separators

Particulate
 Filters

Coalescing
 Filters

Regulators

Pilot
 Regulators

Filter /
 Regulators

Micro-Mist
 Lubricators


Mist
 Lubricators

Combinations


- Regulator can be mounted with knob in up or down position
- 40 micron filter element
- Gauges included on combinations
- Manual twist drain
- Relieving regulator



C628 Standard Combinations



Port size	Bowl type	Bowl capacity	Element type	Part number
3/4"	Metal / Sight gauge	16 oz	40 micron	C628-06FRLWJCW
3/4"	Metal / Without sight gauge	32 oz	40 micron	C628-06FRLEJCE
1"	Metal / Sight gauge	16 oz	40 micron	C628-08FRLWJCW
1"	Metal / Without sight gauge	32 oz	40 micron	C628-08FRLEJCE
1-1/4"	Metal / Sight gauge	16 oz	40 micron	C628-10FRLWJCW
1-1/4"	Metal / Without sight gauge	32 oz	40 micron	C628-10FRLEJCE
1-1/2"	Metal / Sight gauge	16 oz	40 micron	C628-12FRLWJCW
1-1/2"	Metal / Without sight gauge	32 oz	40 micron	C628-12FRLEJCE

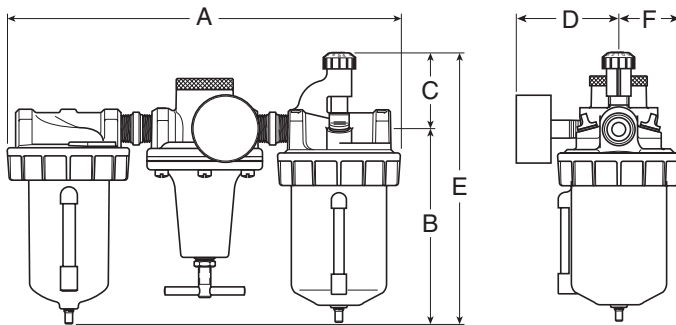

A	B	C	D	E	F
C628-06FRL, C628-08FRL					
15.75 (400)	7.75 (197)	5.25 (133)	3.52 (89)	13.00 (330)	2.48 (63)
C628-10FRL, C628-12FRL					
16.50 (419)	8.13 (206)	6.00 (152)	3.86 (98)	14.13 (359)	2.64 (67)

Inches (mm)
 • All dimensions nominal.



WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

CAUTION:

REGULATOR PRESSURE ADJUSTMENT –

The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Most popular. For technical information see CD

