


Quick Coupling Products



Standard Hose Barb

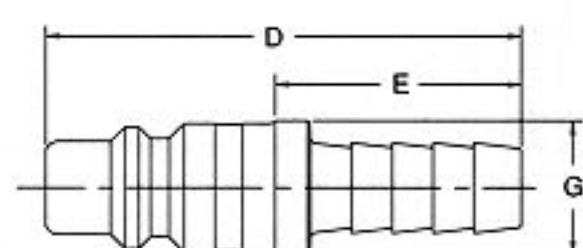

Body Size (in.)	Part No. Brass	Part No. Steel	Hose I.D.	Dimension (in.)			Wt. (LB.) P/Piece
				Overall Length	Exposed Length*	Largest Diameter	
				D	E	G	
1/4	—	H8C	1/4	2.09	1.33	0.55	0.04
1/4	—	H8C-D	5/16	2.09	1.33	0.55	0.04
1/4	—	H9C	3/8	2.09	1.33	0.55	0.05
3/8	—	H5E	3/8	2.19	1.24	0.62	0.07
3/8	—	H6E	1/2	2.19	1.52	0.68	0.08
1/2	—	H4F	3/8	2.53	1.29	0.68	0.10
1/2	—	H5F	1/2	2.53	1.57	0.68	0.11
1/2	—	H5F-G	3/4	3.06	1.91	0.93	0.18
3/4	—	H5G-F	1/2	2.47	1.59	0.93	0.19
3/4	BH5G	—	3/4	3.00	2.28	0.93	0.25
3/4	—	H5G	3/4	3.00	2.28	0.93	0.23
3/4	—	H5G-J	1	3.24	2.28	1.24	0.36

* This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker Series coupler.

Push-Lok Hose Barb**

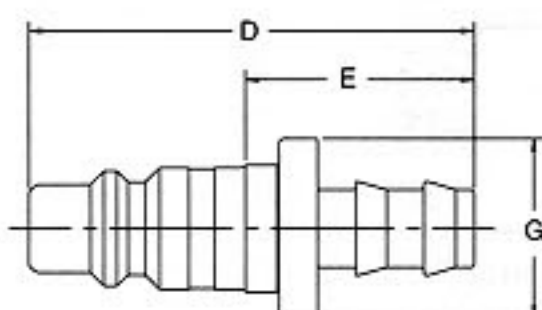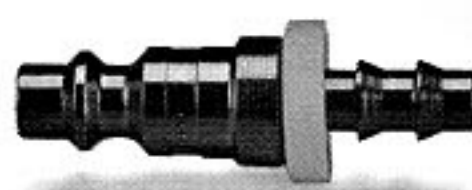


Body Size (in.)	Part No. Brass	Part No. Steel	Hose I.D.	Dimension (in.)			Wt. (LB.) P/Piece
				Overall Length	Exposed Length*	Largest Diameter	
				D	E	G	
1/4	BH8CP	—	1/4	1.93	1.16	0.69	0.04
1/4	—	H8CP	1/4	1.93	1.16	0.69	0.03
1/4	—	H9CP	3/8	2.08	1.31	0.86	0.05
3/8	—	H4EP	1/4	2.02	1.08	0.69	0.06
3/8	—	H5EP	3/8	2.17	1.23	0.86	0.07
3/8	—	H6EP	1/2	2.31	1.37	0.97	0.09
1/2	—	H4FP	3/8	2.52	1.27	0.86	0.11
1/2	—	H5FP	1/2	2.66	1.42	0.97	0.11

*This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 20 Series coupler.

**Push-Lok hose barbs are designed for use with Parker push-lok hose and do not require clamps.

Reusable Hose Fittings

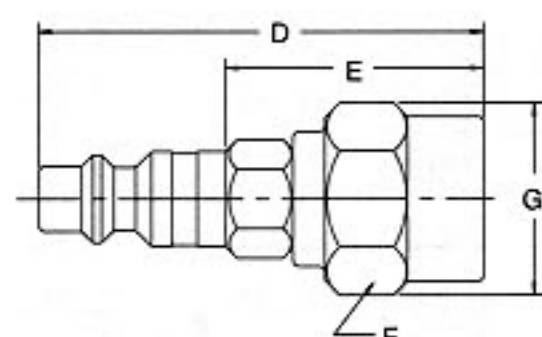

Body Size (in.)	Part No. Steel	Hose I.D.	Hose O.D.	Overall Length	Dimensions (in.)			Wt. (LB.) P/Piece
					Exposed Length*	Hex Size	Largest Diameter	
					D	E	F	G
1/4	H8C-C3	1/4	1/2	2.19	1.42	0.69	0.79	0.10
1/4	H8C-C5	1/4	9/16	2.19	1.42	0.75	0.87	0.10
1/4	H8C-C6	1/4	5/8	2.19	1.42	0.81	0.94	0.10

*This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 20 Series coupler.