


- Industry leading NFPA interchangeable rod lock cylinder with flexible construction
- Rod lock holding force equivalent to cylinder output force at 100 PSIG
- Bore sizes – 1-1/2", 2", 2-1/2", 3-1/4", 4", 5", 6" and 8"
- 17 standard styles mounting styles available
- Available in any practical stroke length
- Rod diameters – 5/8", 1", 1-3/8" and 1-3/4"
- Single rod end or double rod ends
- Adjustable cushions are standard at both ends
- Manual override feature standard on all configurations



Operating information

Operating pressure: 100 PSIG (7 bar) maximum air pressure, except 2" bore with 1" rod rated at 80 PSIG)
 60 PSIG (4.1 bar) minimum air pressure to release rod lock

Temperature range –
 Standard seals -10°F to 165°F (-23°C to 74°C)
 Fluorocarbon seals -10°F to 250°F (-23°C to 121°C)











Filtration requirements: 40 micron, dry filtered air








For technical information see CD

Ordering information

2.00	C	J	4MAJ	U	1	4	A	C	6.000
Bore size 1.50 ¹ 2.00 2.50 3.25 4.00 5.00 6.00 ^{2, 11} 8.00 ^{2, 11}	Double Rod Cylinder ¹² Specify "K" only if double rod cylinder is required. Mounting style Specify mounting style code (see table on following page).	Series 4MAJ 4MA rod lock cylinder 3MAJ 3MA rod lock cylinder	Ports ⁴ U NPTF R BSPP B BSPT T SAE	Piston rod number Specify rod code number for required diameter. ⁸	Special modification Specify "S" only for special modification other than rod end, and then describe modification in item notes. (Includes 4MAJ with Linear Position Sensor Option) ⁷	Stroke length Specify stroke length required in inches. ⁸	Cushion cap end C Cushioned cap end "C" is required	Piston rod thread type A Standard (UNF unified thread) W BSF British fine M* Metric	Rod material and gland code Blank Standard rod and gland H Standard rod and HI LOAD gland Y 17-4 PH stainless steel rod and standard gland Z 17-4 PH stainless steel rod and HI LOAD gland
Cushion head end C Cushioned head end "C" is required	Cylinder construction Blank* Standard (extruded body, standard round lobe orientation) A* Extruded body, round lobe orientation rotated 90 degrees from standard N* Extruded body, round lobe orientation rotated 180 degrees from standard Z* Extruded body, round lobe orientation rotated 270 degrees from standard T Aluminum round tube and carbon steel tie rods & nuts	Seals Blank Standard (nitrile seals) V Fluorocarbon seals ^{2, 5} E Fluorocarbon rod wiper and rod seal only ⁶	Piston rod thread style 4 Small male 8 Intermediate male 9 Short female 55 For use with split coupler ⁹ 3 Special (and specify all dimensions required)	Piston type ¹¹ Blank Standard (lipseals and magnetic ring) ¹² 1 Lipseals, no magnetic ring ¹² 2 Lipseals, no magnetic ring (aluminum piston) 3 Lipseals and magnetic ring (aluminum piston) 4 Bumper seals, no magnetic ring 6 Bumper seals and magnetic ring B Lipseals, 1/4" thick bumpers both ends ³ H Lipseals, 1/4" thick bumper head end ³ C Lipseals, 1/4" thick bumper cap end ³ D Lipseals and magnetic ring, 1/4" thick bumpers both ends ³ F Lipseals and magnetic ring, 1/4" thick bumper head end ³ R Lipseals and magnetic ring, 1/4" thick bumper cap end ³	Notes 1 Not available with 1" rod diameter (rod number 2) for 1-1/2" bore. Not available with Linear Position Sensor Option (LPSO). 2 Not available for 3MAJ, please specify 4MAJ. 3 Addition of 1/4" bumper results in a 1/4" stroke loss per bumper, per end. For example, a 6" stroke cylinder with 1/4" bumpers at both ends (option B) has an effective stroke of 5-1/2". 4 Port thread styles only for base cylinder. Rod lock port is always NPTF. If a different rod lock port thread style is required, place an "S" for special in the Special Modification field and indicate the desired rod lock port thread style in the item notes. NPTF cylinder ports are must be ordered for 3MAJ. 5 Fluorocarbon seals for 4MAJ are only for external chemical compatibility applications, not high temperature. 6 Used for external chemical compatibility applications, not high temperature. 7 For Linear Position Sensor Option (LPSO), please include the following information for the Special Modification item notes: a. Sensor part number (please reference catalog 0900P-E, pages B100-B104) b. Sensor position c. Port position (if other than position 1) d. Length of stop tubing, gross stroke and net stroke (if required) LPSO not available for 3MAJ, please specify 4MAJ. Cylinder dimensions will	Footnotes approximate dimensions for 4MAJ. Piston Type option (blank), 3, 6, D, F or R is required. Please consult the Actuator Division for additional information. 8 Review Piston Rod Selection Chart, please reference catalog 0900P-E, on page A14 to determine proper piston rod diameter. 9 For additional information regarding this style, please reference catalog 0900P-E, page B105. If non-standard Rod Material and Gland Code is required with this option, please place an "S" for special in Special Modification field and specify Rod Material and Gland Code in the item notes. 10 If a stop tube is required, specify gross stroke (net stroke + stop tube) in the model number, then place an "S" for special in the Special Modification field and specify the stop tube length in the item notes. Not available with Piston Types (blank) and 1 for 1-1/2" - 5" bore cylinders. Stop tube not available for 3MAJ, please specify 4MAJ. 11 6"-8" bore 4MAJ can accept only Piston Types (blank) and 3. The (blank) piston for 6"-8" bores is aluminum, lipseals, no magnetic ring. Composite pistons not available with oversize rod number 3. 12 Double rod cylinders not available with composite piston type.			

3MAJ*/4MAJ Mounting Styles for 6" to 8" Bore

Mounting style	NFPA mounting	Description	Bore size
T 	MX0	No Mount	1-1/2 - 8
J 	MF1	Head Rectangular Flange	1-1/2 - 6
H 	MF2	Cap Rectangular Flange	1-1/2 - 6
TB 	MX3	Tie Rods Extended Head End	1-1/2 - 8
TC 	MX2	Tie Rods Extended Cap End	1-1/2 - 8
TD 	MX1	Tie Rods Extended Both Ends	1-1/2 - 8
C 	MS2	Side Lug	1-1/2 - 8
F 	MS4	Side Tap	1-1/2 - 8
CB 	MS1	Side End Angle	1-1/2 - 8
G 	MS7	Side End Lug	1-1/2 - 4

Mounting style	NFPA mounting	Description	Bore size
BB 	MP1	Cap Fixed Clevis	1-1/2 - 8
BC 	MP2	Cap Detachable Clevis	1-1/2 - 8
BE 	MP4	Cap Detachable Eye	1-1/2 - 6
D 	MT1	Head Trunnion	1-1/2 - 8
DB 	MT2	Cap Trunnion	1-1/2 - 8
DD 	MT4	Intermediate Trunnion	1-1/2 - 8
KT 	MDX0	Double Rod End, No Mount	1-1/2 - 8

* 3MAJ utilizes base 3MA cylinder and is available in 1-1/2" to 5" bore sizes. Mounting style codes C, D and DB not available for 3MAJ

B

**Tie Rod Cylinders
Actuator Products**

**3MA
Series**

**4MA/4ML
Series**

**3MAJ/4MAJ
Series**

**4MNR
Series**

**P1D
Series**

Sensors



For sensors see page B294.





3MAJ/4MAJ Series Single Rod Dimensions

No Mount Basic

Style T
(NFPA MX0)

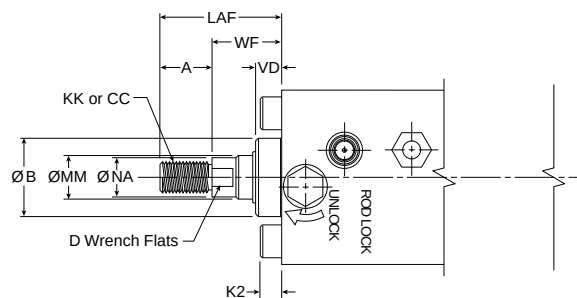

For dimensions of all standard rod end styles, see next page.

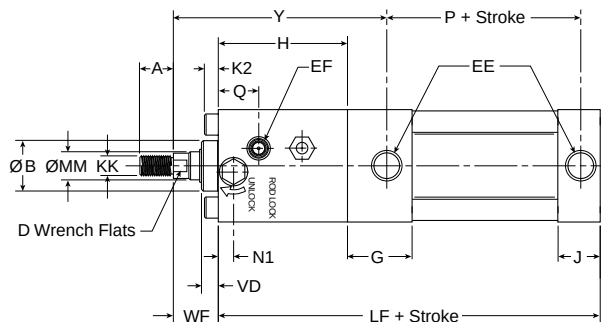


Style T

Bore size	Rod no.	Rod dia. MM	Thread		A	AA	B	D	E	EE (NPTF)	EF (NPTF)	G	H	J
			Style 8 CC	Style 4 & 9 KK										
1-1/2	1	5/8	1/2-20	7/16-20	0.750	2.020	1.124	1/2	2.000	3/8	1/8	1.438	2.625	0.938
	1	5/8	1/2-20	7/16-20	0.750	2.600	1.124	1/2	2.500	3/8	1/8	1.375	2.875	0.937
	3	1	7/8-14	3/4-16	1.125	2.600	1.499	7/8	2.500	3/8	1/8	1.375	3.875	0.937
2-1/2	1	5/8	1/2-20	7/16-20	0.750	3.100	1.124	1/2	3.000	3/8	1/8	1.344	2.875	0.938
	3	1	7/8-14	3/4-16	1.125	3.100	1.499	7/8	3.000	3/8	1/8	1.344	4.000	0.938
3-1/4	1	1	7/8-14	3/4-16	1.125	3.900	1.499	7/8	3.750	1/2	1/4	1.594	4.500	1.125
	3	1-3/8	1-1/4-12	1-14	1.625	3.900	1.999	1-1/8	3.750	1/2	1/4	1.594	4.875	1.125
4	1	1	7/8-14	3/4-16	1.125	4.700	1.499	7/8	4.500	1/2	1/4	1.594	4.875	1.125
	3	1-3/8	1-1/4-12	1-14	1.625	4.700	1.999	1-1/8	4.500	1/2	1/4	1.594	5.125	1.125
5	1	1	7/8-14	3/4-16	1.125	5.800	1.499	7/8	5.500	1/2	1/4	1.594	5.375	1.219
	3	1-3/8	1-1/4-12	1-14	1.625	5.800	1.999	1-1/8	5.500	1/2	1/4	1.594	5.750	1.219


Bore size	Rod no.	Rod dia. MM									Add stroke						
			K2	LAF	N1	N2	Hex N3	NA	NR	Q	R	VD	WF	Y	LF	P	
1-1/2	1	5/8	0.250	1.750	0.220	0.140	5/16	0.563	0.190	0.715	1.430	0.375	1.000	4.500	6.250	2.313	
	1	5/8	0.313	1.750	0.340	0.130	1/2	0.563	0.265	0.895	1.840	0.375	1.000	4.750	6.500	2.313	
2	3	1	0.313	2.500	0.338	0.146	1/2	0.938	0.275	1.065	1.840	0.500	1.375	6.125	7.500	2.313	
	1	5/8	0.313	1.750	0.346	0.150	1/2	0.563	0.265	0.755	2.190	0.500	1.000	4.813	6.625	2.375	
2-1/2	3	1	0.313	2.500	0.346	0.148	1/2	0.938	0.265	1.120	2.190	0.500	1.375	6.313	7.750	2.375	
	1	1	0.375	2.500	0.631	0.180	5/8	0.938	0.340	1.510	2.760	0.500	1.375	6.938	8.750	2.625	
3-1/4	3	1-3/8	0.375	3.250	0.813	0.247	5/8	1.313	0.350	1.645	2.760	0.625	1.625	7.563	9.125	2.625	
	1	1	0.375	2.500	0.625	0.240	7/8	0.938	0.500	1.725	3.320	0.500	1.375	7.313	9.125	2.625	
4	3	1-3/8	0.375	3.250	0.771	0.276	7/8	1.313	0.490	1.679	3.320	0.750	1.625	7.813	9.375	2.625	
	1	1	0.500	2.500	0.720	0.220	7/8	0.938	0.500	1.995	4.100	0.500	1.375	7.813	9.875	2.875	
5	3	1-3/8	0.500	3.250	0.720	0.220	7/8	1.313	0.490	2.330	4.100	0.750	1.625	8.438	10.250	2.875	

Rod End Dimensions


Thread Style 4 (NFPA Style SM) Small Male

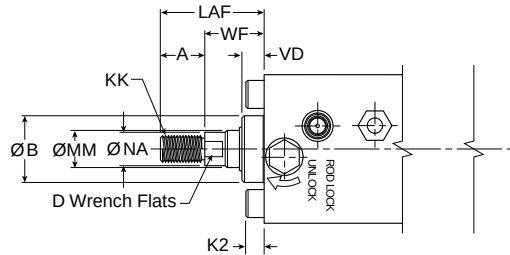


Thread Style 8 (NFPA Style IM) Intermediate Male

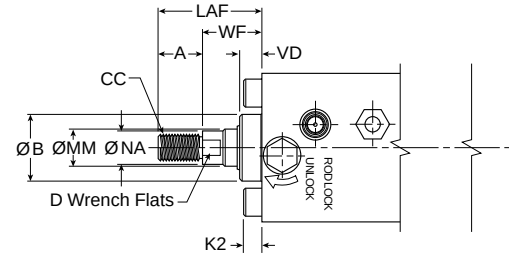

Thread Style 9 (NFPA Style SF) Short Female

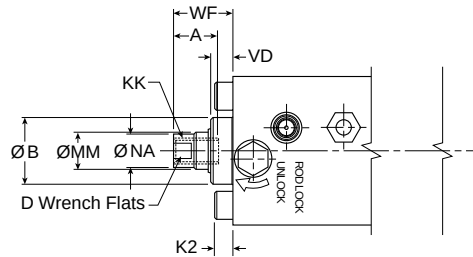

Thread Style 55 For use with Split Coupler (please reference catalog 0900P-E, page B105 for more information)

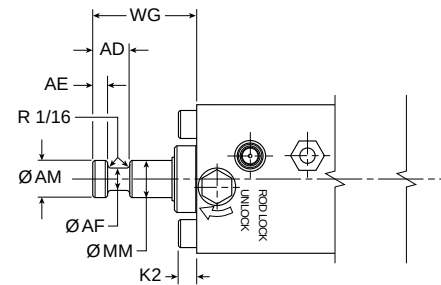

Thread Style 3 - "Special Thread"



Special threads, rod extensions, rod eyes, blanks, etc. are also available.
To order, specify "Style 3" and give desired dimensions for KK or CC, A and W or WF.
If otherwise special, please supply dimensioned sketch.

Rod End Dimensions

Bore size	Rod no.	Rod dia. MM	Thread		A	AD	AE	AF	AM	B	D	K2	LAF	NA	VD	WF	WG
			Style 8 CC	Style 4 & 9 KK													
1-1/2	1	5/8	1/2-20	7/16-20	0.750	0.625	0.250	0.375	0.570	1.124	1/2	0.250	1.750	0.563	0.375	1.000	1.750
	2	1	1/2-20	7/16-20	0.750	0.625	0.250	0.375	0.570	1.124	1/2	0.313	1.750	0.563	0.375	1.000	1.750
2	3	1	7/8-14	3/4-16	1.125	0.938	0.375	0.688	0.950	1.499	7/8	0.313	2.500	0.938	0.500	1.375	2.375
	1	5/8	1/2-20	7/16-20	0.750	0.625	0.250	0.375	0.570	1.124	1/2	0.313	1.750	0.563	0.500	1.000	1.750
2-1/2	3	1	7/8-14	3/4-16	1.125	0.938	0.375	0.688	0.950	1.499	7/8	0.313	2.500	0.938	0.500	1.375	2.375
	1	1	7/8-14	3/4-16	1.125	0.938	0.375	0.688	0.950	1.499	7/8	0.375	2.500	0.938	0.500	1.375	2.375
3-1/4	3	1-3/8	1-1/4-12	1-14	1.625	1.063	0.375	0.875	1.320	1.999	1-1/8	0.375	3.250	1.313	0.625	1.625	2.750
	1	1	7/8-14	3/4-16	1.125	0.938	0.375	0.688	0.950	1.499	7/8	0.375	2.500	0.938	0.500	1.375	2.375
4	3	1-3/8	1-1/4-12	1-14	1.625	1.063	0.375	0.875	1.320	1.999	1-1/8	0.375	3.250	1.313	0.750	1.625	2.750
	1	1	7/8-14	3/4-16	1.125	0.938	0.375	0.688	0.950	1.499	7/8	0.500	2.500	0.938	0.500	1.375	2.375
5	3	1-3/8	1-1/4-12	1-14	1.625	1.063	0.375	0.875	1.320	1.999	1-1/8	0.500	3.250	1.313	0.750	1.625	2.750

Head Rectangular Flange



Style J
(NFPA MF1)

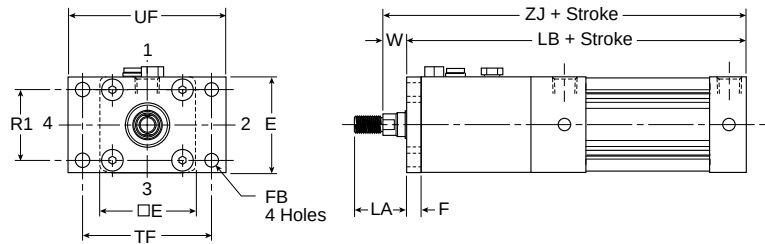

Note: Style J has a W dimension instead of WF and a LA dimension instead of LAF because of the flange installation. Please use dimensions W and LA regarding rod ends only for Style J.
For reference, $WF = W + F$ and $LA = W + A$.

Cap Rectangular Flange

Style H
(NFPA MF2)


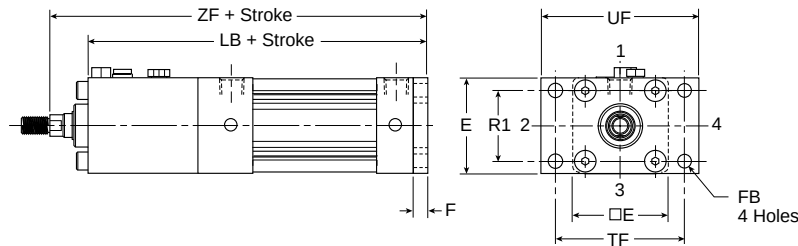



Styles J and H

Bore size	Rod no.	Rod dia. MM	A	E	F	FB	LA	R1	TF	UF	Add stroke			
											W	LB	ZF	ZJ
1-1/2	1	5/8	0.750	2.000	0.375	0.313	1.375	1.430	2.750	3.375	0.625	6.625	7.625	7.250
	1	5/8	0.750	2.500	0.375	0.375	1.375	1.840	3.375	4.125	0.625	6.875	7.875	7.500
	3	1	1.125	2.500	0.375	0.375	2.125	1.840	3.375	4.125	1.000	7.875	9.250	8.875
2	1	5/8	0.750	3.000	0.375	0.375	1.375	2.190	3.875	4.625	0.625	7.000	8.000	7.625
	3	1	1.125	3.000	0.375	0.375	2.125	2.190	3.875	4.625	1.000	8.125	9.500	9.125
	1	1	1.125	3.750	0.625	0.438	1.875	2.760	4.688	5.500	0.750	9.375	10.750	10.125
3-1/4	3	1-3/8	1.625	3.750	0.625	0.438	2.625	2.760	4.688	5.500	1.000	9.750	11.375	10.750
	1	1	1.125	4.500	0.625	0.438	1.875	3.320	5.438	6.250	0.750	9.750	11.125	10.500
	3	1-3/8	1.625	4.500	0.625	0.438	2.625	3.320	5.438	6.250	1.000	10.000	11.625	11.000
4	1	1	1.125	5.500	0.625	0.563	1.875	4.100	6.625	7.625	0.750	10.500	11.875	11.250
	3	1-3/8	1.625	5.500	0.625	0.563	2.625	4.100	6.625	7.625	1.000	10.875	12.500	11.875




Tie Rods Extended Head End Mount

Style TB
(NFPA MX3)

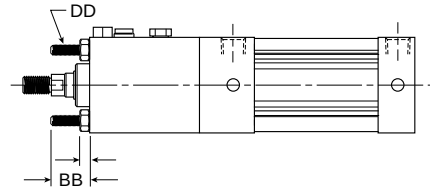




Tie Rods Extended Cap End Mount

Style TC
(NFPA MX2)

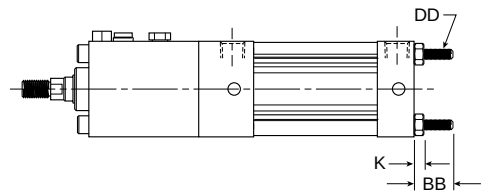

Tie Rods Extended Both Ends Mount

Style TD
(NFPA MX1)

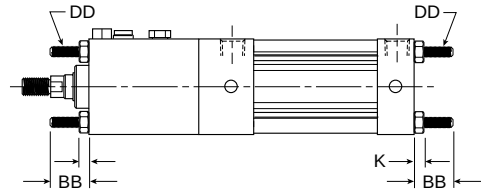



Styles TB, TC and TD

Bore size	Rod no.	Rod dia. MM	AA	BB	DD	E	K	R
1-1/2	1	5/8	2.020	1.000	1/4-28	2.000	0.250	1.430
2	1	5/8	2.600	1.125	5/16-24	2.500	0.313	1.840
	3	1	2.600	1.125	5/16-24	2.500	0.313	1.840
2-1/2	1	5/8	3.100	1.125	5/16-24	3.000	0.313	2.190
	3	1	3.100	1.125	5/16-24	3.000	0.313	2.190
3-1/4	1	1	3.900	1.375	3/8-24	3.750	0.375	2.760
	3	1-3/8	3.900	1.375	3/8-24	3.750	0.375	2.760
4	1	1	4.700	1.375	3/8-24	4.500	0.375	3.320
	3	1-3/8	4.700	1.375	3/8-24	4.500	0.375	3.320
5	1	1	5.800	1.813	1/2-20	5.500	0.438	4.100
	3	1-3/8	5.800	1.813	1/2-20	5.500	0.438	4.100

Side Lug Mount

Style C (only 4MAJ)
(NFPA MS2)

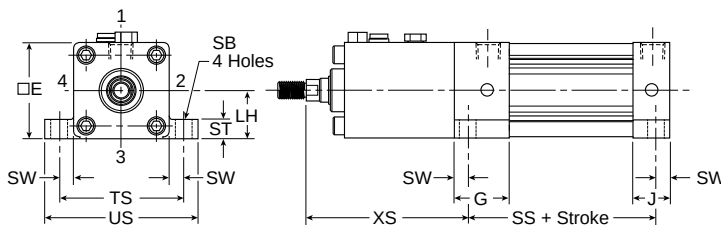



Style C

Bore size	Rod no.	Rod dia. MM	E	G	J	+/- .003		SB	ST	SW	TS	US	XS	Add stroke SS
						LH								
1-1/2	1	5/8	2.000	1.438	0.938	0.993		0.438	0.500	0.375	2.750	3.500	4.000	2.875
	2	5/8	2.500	1.375	0.937	1.243		0.438	0.500	0.375	3.250	4.000	4.250	2.875
2	3	1	2.500	1.375	0.937	1.243		0.438	0.500	0.375	3.250	4.000	5.625	2.875
	1	5/8	3.000	1.344	0.938	1.493		0.438	0.500	0.375	3.750	4.500	4.250	3.000
2-1/2	3	1	3.000	1.344	0.938	1.493		0.438	0.500	0.375	3.750	4.500	5.750	3.000
	1	1	3.750	1.594	1.125	1.868		0.563	0.750	0.500	4.750	5.750	6.375	3.250
3-1/4	3	1-3/8	3.750	1.594	1.125	1.868		0.563	0.750	0.500	4.750	5.750	7.000	3.250
	1	1	4.500	1.594	1.125	2.243		0.563	0.750	0.500	5.500	6.500	6.750	3.250
4	3	1-3/8	4.500	1.594	1.125	2.243		0.563	0.750	0.500	5.500	6.500	7.250	3.250
	1	1	5.500	1.594	1.219	2.743		0.813	1.000	0.688	6.875	8.250	7.438	3.125
5	3	1-3/8	5.500	1.594	1.219	2.743		0.813	1.000	0.688	6.875	8.250	8.063	3.125

Side Tap Mount

Style F
(NFPA MS4)

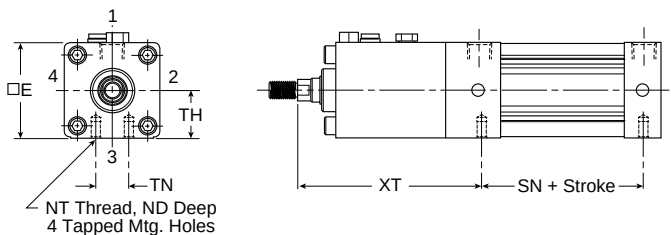



Style F

Bore size	Rod no.	Rod dia. MM	E	ND	NT	+/- .003		TN	XT	Add stroke SN
						TH				
1-1/2	1	5/8	2.000	0.375	1/4-20	0.993		0.625	4.563	2.250
	2	5/8	2.500	0.438	5/16-18	1.243		0.875	4.813	2.250
2	3	1	2.500	0.375	5/16-18	1.243		0.875	6.188	2.250
	1	5/8	3.000	0.625	3/8-16	1.493		1.250	4.813	2.375
2-1/2	3	1	3.000	0.625	3/8-16	1.493		1.250	6.313	2.375
	1	1	3.750	0.750	1/2-13	1.868		1.500	6.938	2.625
3-1/4	3	1-3/8	3.750	0.750	1/2-13	1.868		1.500	7.563	2.625
	1	1	4.500	0.750	1/2-13	2.243		2.063	7.313	2.625
4	3	1-3/8	4.500	0.750	1/2-13	2.243		2.063	7.813	2.625
	1	1	5.500	0.938	5/8-11	2.743		2.688	7.813	2.875
5	3	1-3/8	5.500	0.938	5/8-11	2.743		2.688	8.438	2.875

Side End Angle Mount

Style CB
(NFPA MS1)

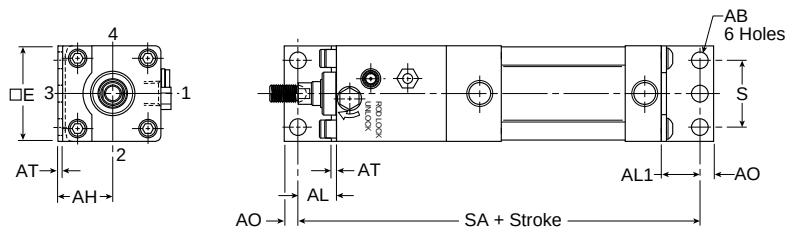



Style CB

Bore size	Rod no.	Rod dia. MM	AB	AH	AL	AL1	AO	AT	E	S	Add stroke SA
1-1/2	1	5/8	0.438	1.188	1.000	1.000	0.375	0.125	2.000	1.250	8.250
2	1	5/8	0.438	1.438	1.000	1.000	0.375	0.125	2.500	1.750	8.500
	3	1	0.438	1.438	1.000	1.000	0.375	0.125	2.500	1.750	9.500
2-1/2	1	5/8	0.438	1.625	1.000	1.000	0.375	0.125	3.000	2.250	8.625
	3	1	0.438	1.625	1.000	1.000	0.375	0.125	3.000	2.250	9.750
3-1/4	1	1	0.563	1.938	1.250	1.250	0.500	0.125	3.750	2.750	11.250
	3	1-3/8	0.563	1.938	1.250	1.250	0.500	0.125	3.750	2.750	11.625
4	1	1	0.563	2.250	1.875	1.250	0.500	0.125	4.500	3.500	12.250
	3	1-3/8	0.563	2.250	1.875	1.250	0.500	0.125	4.500	3.500	12.500
5	1	1	0.688	2.750	1.375	1.375	0.625	0.188	5.500	4.250	12.625
	3	1-3/8	0.688	2.750	1.375	1.375	0.625	0.188	5.500	4.250	13.000

Side End Lug Mount

Style G
(NFPA MS7)

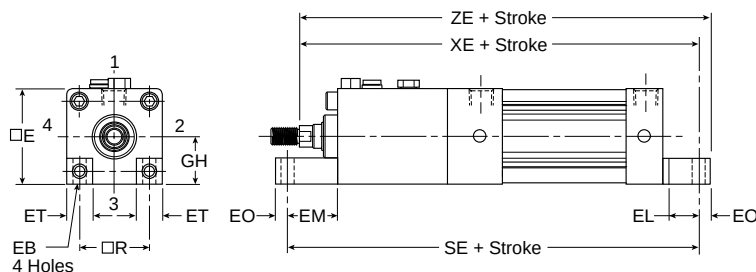



Style G

Bore size	Rod no.	Rod dia. MM	E	EB	EL	EM	EO	ET	+/- .003 GH	R	Add stroke SE	XE	ZE
1-1/2	1	5/8	2.000	0.281	0.750	1.125	0.250	0.563	0.993	1.430	8.125	8.000	8.250
2	1	5/8	2.500	0.344	0.938	1.313	0.313	0.688	1.243	1.840	8.750	8.438	8.750
	3	1	2.500	0.344	0.938	1.313	0.313	0.688	1.243	1.840	9.750	9.813	10.125
2-1/2	1	5/8	3.000	0.344	1.063	1.438	0.313	0.813	1.493	2.190	9.125	8.688	9.000
	3	1	3.000	0.344	1.063	1.438	0.313	0.813	1.493	2.190	10.250	10.188	10.500
3-1/4	1	1	3.750	0.406	0.875	1.500	0.375	1.000	1.868	2.760	11.125	11.000	11.375
	3	1-3/8	3.750	0.406	0.875	1.500	0.375	1.000	1.868	2.760	11.500	11.625	12.000
4	1	1	4.500	0.406	1.000	1.625	0.375	1.188	2.243	3.320	11.750	11.500	11.875
	3	1-3/8	4.500	0.406	1.000	1.625	0.375	1.188	2.243	3.320	12.000	12.000	12.375

Cap Fixed Clevis Mount



Style BB
(NFPA MP1)

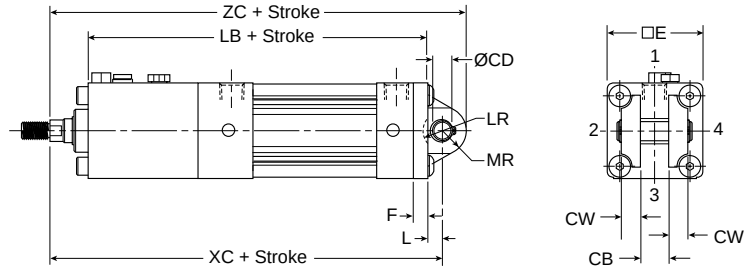

NOTE: For maximum swivel angle of BB mount with rear mounting plate, please reference catalog 0900P-E, cylinder accessories on page B108.

Cap Detachable Clevis Mount

Style BC
(NFPA MP2)

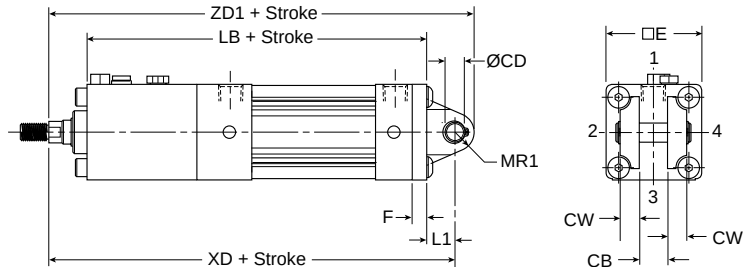



Styles BB and BC

Bore size	Rod no.	Rod dia. MM	CB	+.000 -.002 CD	CW	E	F	L	L1	LR	MR	MR1	Add stroke				
													LB	XC	XD	ZC	ZD1
1-1/2	1	5/8	0.750	0.501	0.500	2.000	0.375	0.375	0.750	0.750	0.625	0.500	6.625	8.000	8.375	8.625	8.875
	2	5/8	0.750	0.501	0.500	2.500	0.375	0.375	0.750	0.750	0.625	0.500	6.875	8.250	8.625	8.875	9.125
2	3	1	0.750	0.501	0.500	2.500	0.375	0.375	0.750	0.750	0.625	0.500	7.875	9.625	10.000	10.250	10.500
	1	5/8	0.750	0.501	0.500	3.000	0.375	0.375	0.750	0.750	0.625	0.500	7.000	8.375	8.750	9.000	9.250
2-1/2	3	1	0.750	0.501	0.500	3.000	0.375	0.375	0.750	0.750	0.625	0.500	8.125	9.875	10.250	10.500	10.750
	1	1	1.250	0.751	0.625	3.750	0.625	0.625	1.250	1.000	0.938	0.750	9.375	11.375	12.000	12.313	12.750
3-1/4	3	1-3/8	1.250	0.751	0.625	3.750	0.625	0.625	1.250	1.000	0.938	0.750	9.750	12.000	12.625	12.938	13.375
	1	1	1.250	0.751	0.625	4.500	0.625	0.625	1.250	1.000	0.938	0.750	9.750	11.750	12.375	12.688	13.125
4	3	1-3/8	1.250	0.751	0.625	4.500	0.625	0.625	1.250	1.000	0.938	0.750	10.000	12.250	12.875	13.188	13.625
	1	1	1.250	0.751	0.625	5.500	0.625	0.625	1.250	1.000	0.938	0.750	10.500	12.500	13.125	13.438	13.875
5	3	1-3/8	1.250	0.751	0.625	5.500	0.625	0.625	1.250	1.000	0.938	0.750	10.875	13.125	13.750	14.063	14.500

Cap Detachable Eye Mount*

Style BE
(NFPA MP4)

*Not available for
5" bore 3MAJ,
please specify 4MAJ.

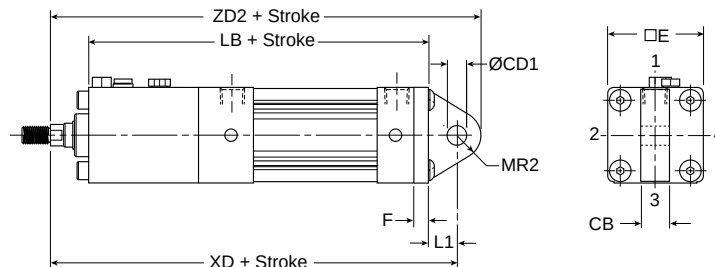



Style BE

Bore size	Rod no.	Rod dia. MM	CB	+0.002 +0.004 CD1	E	F	L1	MR2	Add Stroke		
									LB	XD	ZD2
1-1/2	1	5/8	0.750	0.500	2.000	0.375	0.750	0.625	6.625	8.375	9.000
	3	1	0.750	0.500	2.500	0.375	0.750	0.625	7.875	10.000	10.625
2	1	5/8	0.750	0.500	2.500	0.375	0.750	0.625	6.875	8.625	9.250
	3	1	0.750	0.500	3.000	0.375	0.750	0.688	8.125	10.250	10.938
2-1/2	1	5/8	0.750	0.500	3.000	0.375	0.750	0.688	7.000	8.750	9.438
	3	1	0.750	0.500	3.000	0.375	0.750	0.688	8.125	10.250	10.938
3-1/4	1	1	1.250	0.750	3.750	0.625	1.250	0.875	9.375	12.000	12.875
	3	1-3/8	1.250	0.750	3.750	0.625	1.250	0.875	9.750	12.625	13.500
4	1	1	1.250	0.750	4.500	0.625	1.250	0.875	9.750	12.375	13.250
	3	1-3/8	1.250	0.750	4.500	0.625	1.250	0.875	10.000	12.875	13.750
5 *	1	1	1.250	0.750	5.500	0.625	1.250	0.875	10.500	13.125	14.000
	3	1-3/8	1.250	0.750	5.500	0.625	1.250	0.875	10.875	13.750	14.625

Intermediate Trunnion Mount

Style DD
(NFPA MT4)

Note: Tie rod nuts for Style DD have a slot instead of external hex.

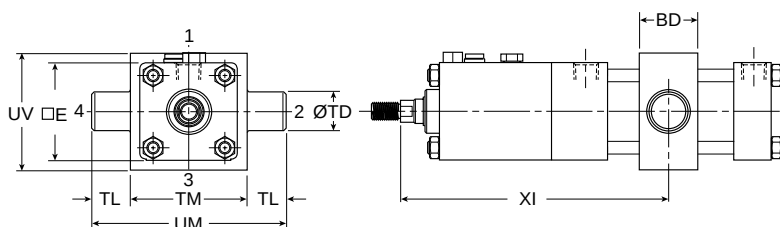



Note: Style DD requires minimum stroke per table.

Style DD

Bore size	Rod no.	Rod dia. MM	E	BD	+0.000 -0.001 TD	TL	TM	UM	UV	Min. XI	Min. stroke
1-1/2	1	5/8	2.000	1.250	1.000	1.000	2.500	4.500	2.500	5.69	3.250
	3	1	2.500	1.500	1.000	1.000	3.000	5.000	3.000	7.38	4.000
2	1	5/8	2.500	1.500	1.000	1.000	3.000	5.000	3.000	6.00	4.000
	3	1	2.500	1.500	1.000	1.000	3.000	5.000	3.000	7.38	4.000
2-1/2	1	5/8	3.000	1.500	1.000	1.000	3.500	5.500	3.500	5.97	3.875
	3	1	3.000	1.500	1.000	1.000	3.500	5.500	3.500	7.47	3.875
3-1/4	1	1	3.750	2.000	1.000	1.000	4.500	6.500	4.250	13.72	4.375
	3	1-3/8	3.750	2.000	1.000	1.000	4.500	6.500	4.250	14.34	4.375
4	1	1	4.500	2.000	1.000	1.000	5.250	7.250	5.000	14.09	4.875
	3	1-3/8	4.500	2.000	1.000	1.000	5.250	7.250	5.000	14.59	4.875
5	1	1	5.500	2.000	1.000	1.000	6.250	8.250	6.000	16.34	5.125
	3	1-3/8	5.500	2.000	1.000	1.000	6.250	8.250	6.000	16.97	5.125



Head Trunnion Mount

Style D (only 4MAJ)
(NFPA MT1)

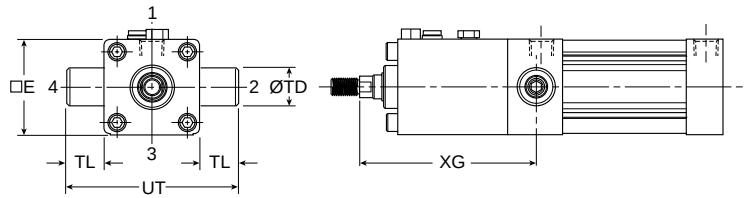

Cap Trunnion Mount

Style DB (only 4MAJ)
(NFPA MT2)

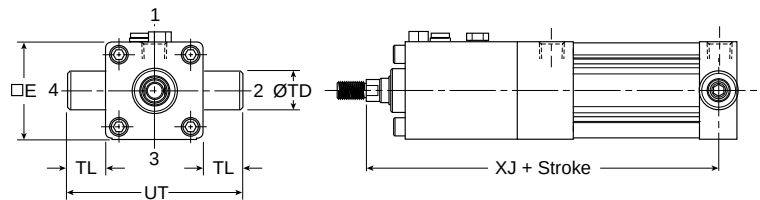



Styles D and DB



Bore size	Rod no.	Rod dia. MM	E	+0.000 -0.001 TD	TL	UT	XG	XJ
1-1/2	1	5/8	2.000	1.000	1.000	4.000	4.375	6.750
2	1	5/8	2.500	1.000	1.000	4.500	4.625	7.000
	3	1	2.500	1.000	1.000	4.500	6.000	8.375
2-1/2	1	5/8	3.000	1.000	1.000	5.000	4.625	7.125
	3	1	3.000	1.000	1.000	5.000	6.125	8.625
3-1/4	1	1	3.750	1.000	1.000	5.750	6.750	9.500
	3	1-3/8	3.750	1.000	1.000	5.750	7.375	10.125
4	1	1	4.500	1.000	1.000	6.500	7.125	9.875
	3	1-3/8	4.500	1.000	1.000	6.500	7.625	10.375
5	1	1	5.500	1.000	1.000	7.500	7.625	10.625
	3	1-3/8	5.500	1.000	1.000	7.500	8.250	11.250

No Mount

Style T
(NFPA MX0)

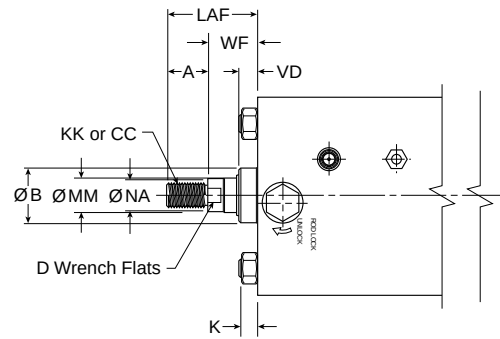

For dimensions of all standard rod end styles, see next page.

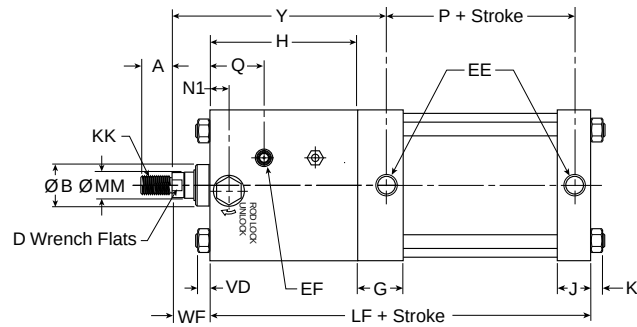

Style T

Bore size	Rod no.	Rod dia. MM	Thread				+.000 -.002	B	D	E	EE (NPTF)	EF (NPTF)	G	H	J	
			Style 8 CC	Style 4 & 9 KK												A
6	1	1-3/8	1-1/4 - 12	1-14			1.625	6.900	1.999	1-1/8	6.500	3/4	1/4	1.910	6.375	1.410
	3	1-3/4	1-1/2 - 12	1-1/4 - 12			2.000	6.900	2.374	1-1/2	6.500	3/4	1/4	1.910	6.875	1.410
8	1	1-3/8	1-1/4 - 12	1-14			1.625	9.100	1.999	1-1/8	8.500	3/4	1/4	1.810	6.625	1.440
	3	1-3/4	1-1/2 - 12	1-1/4 - 12			2.000	9.100	2.374	1-1/2	8.500	3/4	1/4	1.810	7.125	1.440

Bore size	Rod no.	Rod dia. MM													Add stroke	
			K	LAF	N1	N2	Hex N3	NA	NR	Q	R	VD	WF	Y	LF	P
6	1	1-3/8	0.438	3.250	1.165	0.177	1-5/16	1.313	0.750	2.705	4.880	0.755	1.625	9.188	11.375	3.125
	3	1-3/4	0.438	3.875	1.495	0.177	1-5/16	1.688	0.740	3.055	4.880	0.875	1.875	9.938	11.875	3.125
8	1	1-3/8	0.563	3.250	1.305	0.177	1-5/16	1.313	0.740	2.885	6.440	0.755	1.625	9.375	11.750	3.250
	3	1-3/4	0.563	3.875	1.570	0.177	1-5/16	1.688	0.740	3.145	6.440	0.875	1.875	10.125	12.250	3.250

B

Tie Rod Cylinders
Actuator Products

3MA Series

4MA/4ML Series

3MAJ/4MAJ Series


4MNR Series

P1D Series

Rod End Dimensions – 6" to 8" Bore Sizes


Thread Style 4

(NFPA Style SM)
 Small Male

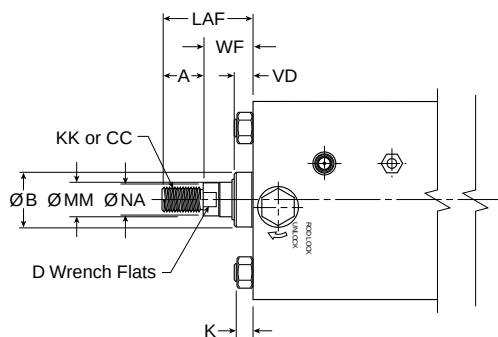


Thread Style 8

(NFPA Style IM)
 Intermediate Male

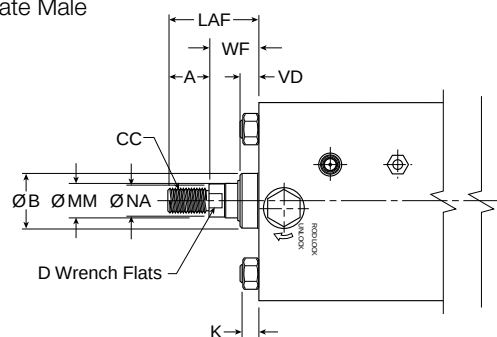


Thread Style 9

(NFPA Style SF)
 Short Female

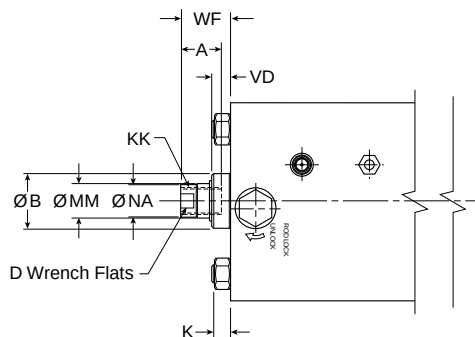

Thread Style 55

For use with Split Coupler
 (please reference catalog 0900P-E, page B105 for more information)

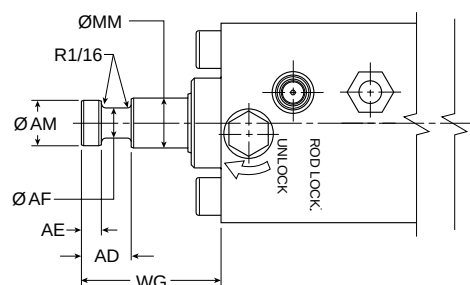

Thread Style 3 - "Special Thread"



Special threads, rod extensions, rod eyes, blanks, etc. are also available.
 To order, specify "Style 3" and give desired dimensions for KK or CC, A and W or WF.
 If otherwise special, please supply dimensioned sketch.

Rod End Dimensions

Bore size	Rod no.	Rod dia. MM	Thread		A	AD	AE	AF	AM	B	D	K	LAF	NA	VD	WF	WG
			Style 8 CC	Style 4 & 9 KK													
6	1	1-3/8	1-1/4-12	1-14	1.625	1.063	0.375	0.875	1.320	1.999	1-1/8	0.438	3.250	1.313	0.755	1.625	2.750
	3	1-3/4	1-1/2-12	1-1/4-12	2.000	1.313	0.500	1.125	1.700	2.374	1-1/2	0.438	3.875	1.688	0.875	1.875	3.125
8	1	1-3/8	1-1/4-12	1-14	1.625	1.063	0.375	0.875	1.320	1.999	1-1/8	0.563	3.250	1.313	0.755	1.625	2.750
	3	1-3/4	1-1/2-12	1-1/4-12	2.000	1.313	0.500	1.125	1.700	2.374	1-1/2	0.563	3.875	1.688	0.875	1.875	3.125

Head Rectangular Flange Mount



Style J
(NFPA MF1)
(only 6" Bore)

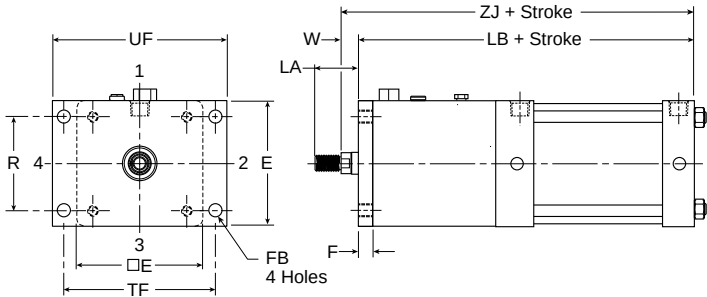

Note: Style J has a W dimension instead of WF and a LA dimension instead of LAF because of the flange installation. Please use dimensions W and LA regarding rod ends only for Style J.
For reference, WF = W + F and LA = W + A.

Cap Rectangular Flange Mount

Style H
(NFPA MF2)
(only 6" Bore)


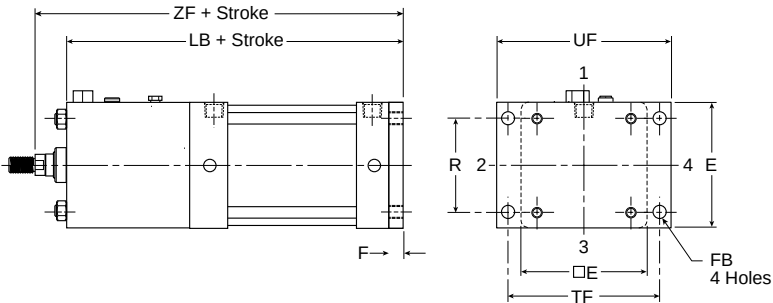



Styles J and H




Bore size	Rod no.	Rod dia. MM	A	E	F	FB	LA	R	TF	UF	W	Add stroke		
												LB	ZF	ZJ
6	1	1-3/8	1.625	6.500	0.750	0.563	2.500	4.880	7.625	8.625	0.875	12.125	13.750	13.000
	3	1-3/4	2.000	6.500	0.750	0.563	3.125	4.880	7.625	8.625	1.125	12.625	14.500	13.750

B	Tie Rod Cylinders Actuator Products			
	P1D Series	4MNR Series	3MAJ/4MAJ Series	4MA/4ML Series
	3MA Series			




Tie Rods Extended Head End Mount
Style TB
(NFPA MX3)

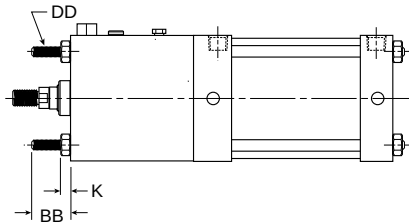

Tie Rods Extended Cap End Mount
Style TC
(NFPA MX2)

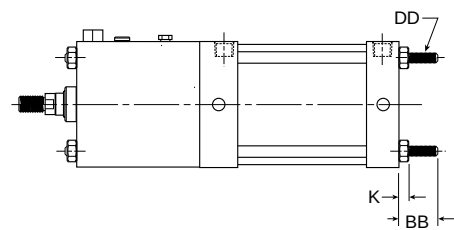

Tie Rods Extended Both Ends Mount
Style TD
(NFPA MX1)

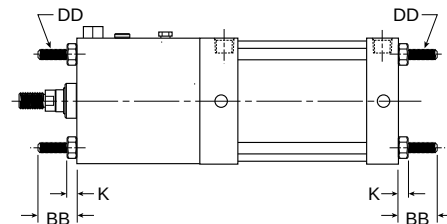



Styles TB, TC and TD

Bore size	Rod no.	Rod dia. MM	AA	BB	DD	E	K	R
6	1	1-3/8	6.900	1.813	1/2-20	6.500	0.438	4.880
	3	1-3/4	6.900	1.813	1/2-20	6.500	0.438	4.880
8	1	1-3/8	9.100	2.313	5/8-18	8.500	0.563	6.440
	3	1-3/4	9.100	2.313	5/8-18	8.500	0.563	6.440

Side End Angle Mount

Style CB
(NFPA MS1)

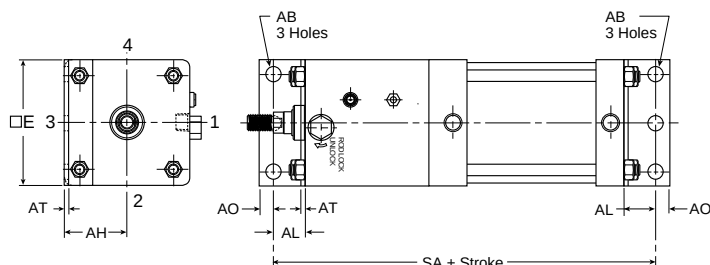



Style CB

Bore size	Rod no.	Rod dia. MM	AB	AH	AL	AO	AT	E	S	Add stroke SA
6	1	1-3/8	0.813	3.250	1.375	0.625	0.188	6.500	5.250	14.125
	3	1-3/4	0.813	3.250	1.375	0.625	0.188	6.500	5.250	14.625
8	1	1-3/8	0.813	4.250	1.813	0.688	0.250	8.500	7.125	15.375
	3	1-3/4	0.813	4.250	1.813	0.688	0.250	8.500	7.125	15.875

Side Tap Mount

Style F
(NFPA MS4)

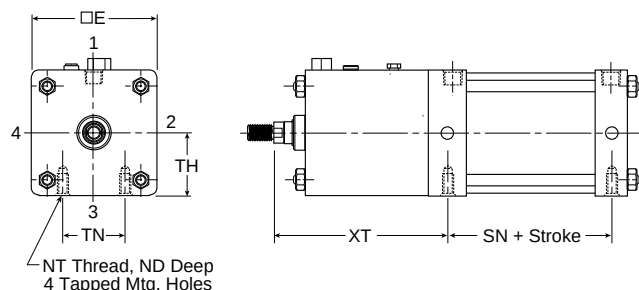



Style F

Bore size	Rod no.	Rod dia. MM	E	ND	NT	+/- .003 TH	TN	XT	Add stroke SN
6	1	1-3/8	6.500	1.125	3/4-10	3.243	3.250	9.188	3.125
	3	1-3/4	6.500	1.125	3/4-10	3.243	3.250	9.938	3.125
8	1	1-3/8	8.500	1.125	3/4-10	4.243	4.500	9.438	3.250
	3	1-3/4	8.500	1.125	3/4-10	4.243	4.500	10.188	3.250

Side Lug Mount

Style C
(NFPA MS2)

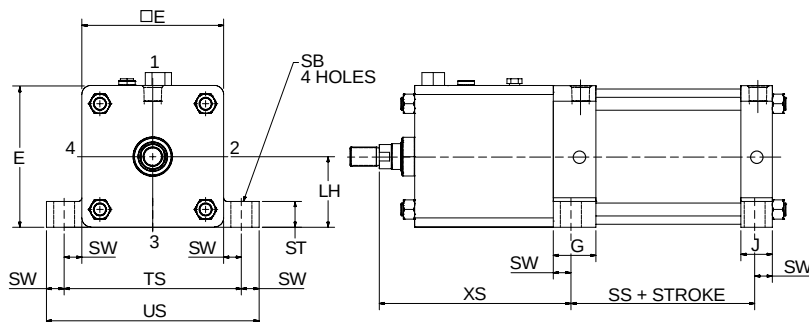



Style C

Bore size	Rod no.	Rod dia. MM	E	G	J	+/- .003 LH	SB	ST	SW	TS	US	XS	Add stroke SS
6	1	1-3/8	6.500	1.910	1.410	3.243	0.813	1.000	0.688	7.875	9.250	8.688	3.625
	3	1-3/4	6.500	1.910	1.410	3.243	0.813	1.000	0.688	7.875	9.250	9.438	3.625
8	1	1-3/8	8.500	1.810	1.440	4.243	0.813	1.000	0.688	9.875	11.250	8.938	3.750
	3	1-3/4	8.500	1.810	1.440	4.243	0.813	1.000	0.688	9.875	11.250	9.688	3.750

Cap Fixed Clevis



Style BB
(NFPA MP1)

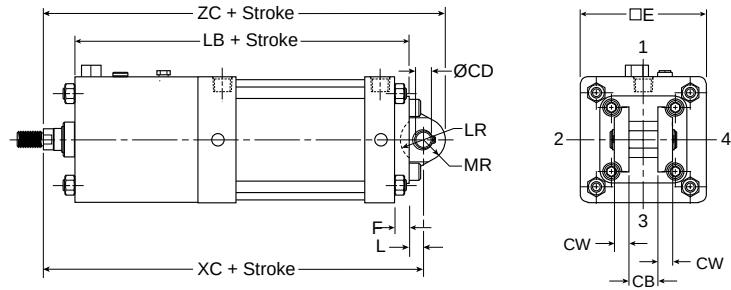

NOTE: For maximum swivel angle of BB mount with rear mounting plate, please reference catalog 0900P-E, cylinder accessories on page B108.

Cap Detachable Clevis

Style BC
(NFPA MP2)

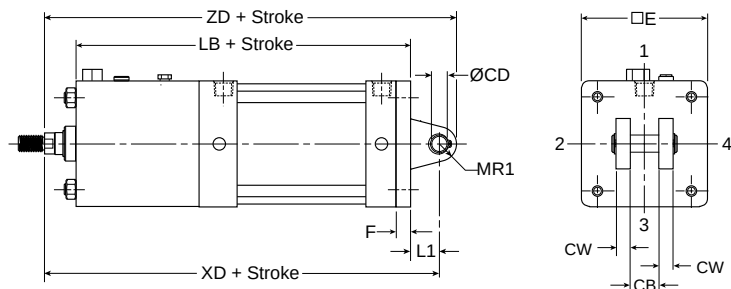



Styles BB and BC

Bore size	Rod no.	Rod dia. MM	CB	+0.002 -0.002 CD	CW	E	F	L	L1	LR	MR	MR1	Add stroke LB	XC	XD	ZC	ZD
6	1	1-3/8	1.500	1.001	0.750	6.500	0.750	0.750	1.500	1.250	1.125	1.000	12.125	14.500	15.250	15.625	16.250
	3	1-3/4	1.500	1.001	0.750	6.500	0.750	0.750	1.500	1.250	1.125	1.000	12.625	15.250	16.000	16.375	17.000
8	1	1-3/8	1.500	1.001	0.750	8.500	0.750	0.750	1.500	1.250	1.125	1.000	12.500	14.875	15.625	16.000	16.625
	3	1-3/4	1.500	1.001	0.750	8.500	0.750	0.750	1.500	1.250	1.125	1.000	13.000	15.625	16.375	16.750	17.375

Cap Detachable Eye Mount

Style BE
(NFPA MP4)
(only 6" Bore)

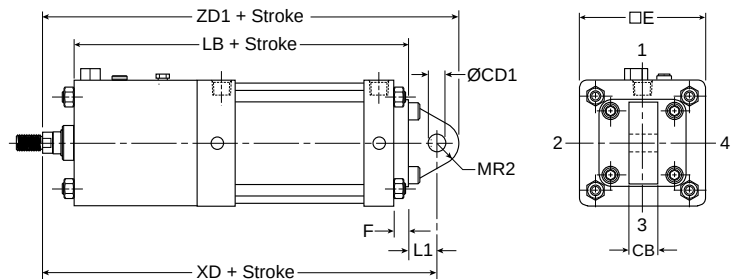



Style BE

Bore size	Rod no.	Rod dia. MM	CB	+0.002 +0.004 CD1	E	F	L1	MR2	Add stroke LB	XD	ZD1
6	1	1-3/8	1.500	1.000	6.500	0.750	1.500	1.125	12.125	15.250	16.375
	3	1-3/4	1.500	1.000	6.500	0.750	1.500	1.125	12.625	16.000	17.125



Head Trunnion Mount

Style D
(NFPA MT1)

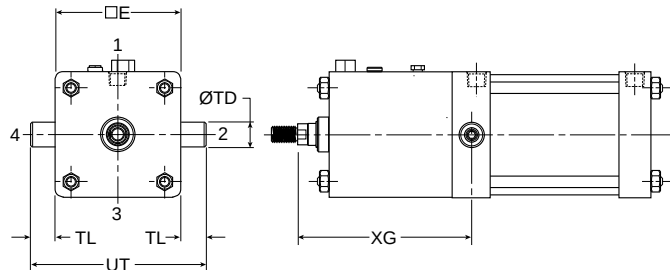

Cap Trunnion Mount

Style DB
(NFPA MT2)

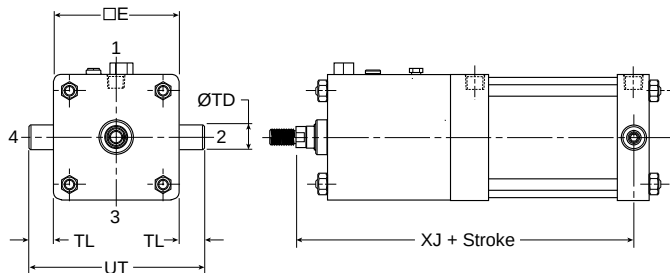



Styles D and DB

Bore size	Rod no.	Rod dia. MM	E	+0.000 -0.001 TD	TL	UT	XG	XJ
6	1	1-3/8	6.500	1.375	1.375	9.250	9.000	12.250
	3	1-3/4	6.500	1.375	1.375	9.250	9.750	13.000
8	1	1-3/8	8.500	1.375	1.375	11.250	9.250	12.625
	3	1-3/4	8.500	1.375	1.375	11.250	10.000	13.375

Intermediate Trunnion Mount

Style DD
(NFPA MT4)

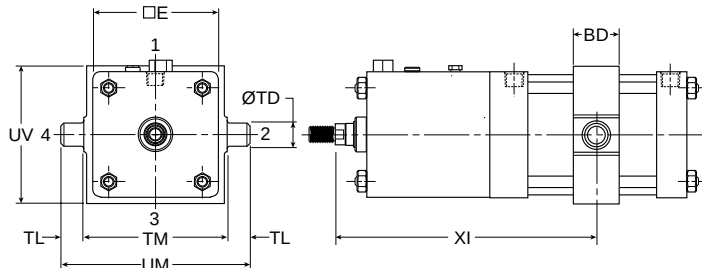

Note: Style DD requires minimum stroke per table.

Style DD

Bore size	Rod no.	Rod dia. MM	E	BD	+0.000 -0.001 TD	TL	TM	UM	UV	Min. XI	Min. stroke
6	1	1-3/8	6.500	2.500	1.375	1.375	7.625	10.375	7.000	20.16	6.125
	3	1-3/4	6.500	2.500	1.375	1.375	7.625	10.375	7.000	20.19	6.125
8	1	1-3/8	8.500	2.500	1.375	1.375	9.750	12.500	9.500	26.31	6.500
	3	1-3/4	8.500	2.500	1.375	1.375	9.750	12.500	9.500	27.06	6.500

B

Tie Rod Cylinders
Actuator Products

3MA
Series

4MA/4ML
Series

3MAJ/4MAJ
Series

4MNR
Series

P1D
Series