



Global Modular
Air Preparation Products

Particulate
Filters

Coalescing
Filters

Regulators

Filter /
Regulators

Lubricators

Combinations

Electronic
Proportional


Soft Start /
Dump Valves

Solenoid
Operators

Accessories
Flow Charts

Filter + Regulator + Lubricator Combinations + Poly Bowl


5 micron element, 8 bar (116 PSIG) Regulator + Gauge and Wall Mounting Brackets
 Inlet pressure 10 bar (145 PSIG), Secondary pressure 6.3 bar (91.3 PSIG),
 1 bar (14.5 PSIG) pressure drop.



	Port size	Drain type	Part number		
			P31 Series	P32 Series	P33 Series
	1/4"	Manual	P31CB92GEMN5LNW	P32CB92GEMNGLNW	
	1/4"	Pulse	P31CB92GEBN5LNW		
	1/4"	Auto		P32CB92GEANGLNW	
	3/8"	Manual		P32CB93GEMNGLNW	
	3/8"	Auto		P32CB93GEANGLNW	
	1/2"	Manual		P32CB94GEMNGLNW	P33CB94GEMNGLNW
	1/2"	Auto		P32CB94GEANGLNW	P33CB94GEANGLNW
	3/4"	Manual			P33CB96GEMNGLNW
	3/4"	Auto			P33CB96GEANGLNW

Filter / Regulator + Lubricator Combinations + Poly Bowl

5 micron element, 8 bar (116 PSIG) Regulator + Gauge and Wall Mounting Brackets
 Inlet pressure 10 bar (145 PSIG), Secondary pressure 6.3 bar (91.3 PSIG),
 1 bar (14.5 PSIG) pressure drop.



	Port size	Drain type	Part number		
			P31 Series	P32 Series	P33 Series
	1/4"	Manual	P31CA92GEMN5LNW	P32CA92GEMNGLNW	
	1/4"	Pulse	P31CA92GEBN5LNW		
	1/4"	Auto		P32CA92GEANGLNW	
	3/8"	Manual		P32CA93GEMNGLNW	
	3/8"	Auto		P32CA93GEANGLNW	
	1/2"	Manual		P32CA94GEMNGLNW	P33CA94GEMNGLNW
	1/2"	Auto		P32CA94GEANGLNW	P33CA94GEANGLNW
	3/4"	Manual			P33CA96GEMNGLNW
	3/4"	Auto			P33CA96GEANGLNW

⚠ WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

CAUTION:

REGULATOR PRESSURE ADJUSTMENT –

The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Most popular.



Ordering information

Filter / Regulator coding (use with codes: A M)																									
Filter coding (use with combo codes: B F G). For multiple filters, repeat as needed	Regulator coding (use with combo code: B)	Lubricator coding (use with combo codes: A B)	Assembly configuration																						
P31 C B 9 2 G	E M	N 5	L N W																						
<table border="1"> <tr><th>Combination</th></tr> <tr><td>B/V + Combination</td></tr> <tr><td>Combination + B/V</td></tr> <tr><td>Combination</td></tr> </table>	Combination	B/V + Combination	Combination + B/V	Combination	<table border="1"> <tr><th>Thread type</th></tr> <tr><td>BSPP</td></tr> <tr><td>BSPT</td></tr> <tr><td>NPT</td></tr> </table>	Thread type	BSPP	BSPT	NPT	<table border="1"> <tr><th>Relief adjustment</th></tr> <tr><td>Non-rising knob relieving</td></tr> </table>	Relief adjustment	Non-rising knob relieving	<table border="1"> <tr><th>Lube type</th></tr> <tr><td>Oil mist standard sight dome</td></tr> <tr><th>Drain type</th></tr> <tr><td>No drain closed end</td></tr> </table>	Lube type	Oil mist standard sight dome	Drain type	No drain closed end								
Combination																									
B/V + Combination																									
Combination + B/V																									
Combination																									
Thread type																									
BSPP																									
BSPT																									
NPT																									
Relief adjustment																									
Non-rising knob relieving																									
Lube type																									
Oil mist standard sight dome																									
Drain type																									
No drain closed end																									
<table border="1"> <tr><th>Combination type*</th></tr> <tr><td>F/R+L</td></tr> <tr><td>F+R+L</td></tr> <tr><td>F+Fc</td></tr> </table>	Combination type*	F/R+L	F+R+L	F+Fc	<table border="1"> <tr><th>Port size</th></tr> <tr><td>1/4 (P31, P32)</td></tr> <tr><td>3/8 (P32)</td></tr> <tr><td>1/2 (P32, P33)</td></tr> <tr><td>3/4 (P33)</td></tr> </table>	Port size	1/4 (P31, P32)	3/8 (P32)	1/2 (P32, P33)	3/4 (P33)	<table border="1"> <tr><th>Element</th></tr> <tr><td>0.01µ Element</td></tr> <tr><td>0.01µ Element with DPI</td></tr> <tr><td>5µ Element</td></tr> <tr><td>5µ Element with DPI</td></tr> <tr><td>1µ Element</td></tr> <tr><td>1µ Element with DPI</td></tr> <tr><td>Adsorber</td></tr> </table>	Element	0.01µ Element	0.01µ Element with DPI	5µ Element	5µ Element with DPI	1µ Element	1µ Element with DPI	Adsorber	<table border="1"> <tr><th>Mounting</th></tr> <tr><td>No bracket</td></tr> <tr><td>Port blocks</td></tr> <tr><td>Port blocks with wall brkt</td></tr> <tr><td>Wall bracket</td></tr> </table>	Mounting	No bracket	Port blocks	Port blocks with wall brkt	Wall bracket
Combination type*																									
F/R+L																									
F+R+L																									
F+Fc																									
Port size																									
1/4 (P31, P32)																									
3/8 (P32)																									
1/2 (P32, P33)																									
3/4 (P33)																									
Element																									
0.01µ Element																									
0.01µ Element with DPI																									
5µ Element																									
5µ Element with DPI																									
1µ Element																									
1µ Element with DPI																									
Adsorber																									
Mounting																									
No bracket																									
Port blocks																									
Port blocks with wall brkt																									
Wall bracket																									
* Combination type F = 5µ Fc1 = 1µ Fc = .01µ Fa = Adsorber	* Not available with F/R. † Not available on P31 Series	<table border="1"> <tr><th>Adjustment range</th></tr> <tr><td>P31 with square gauge</td></tr> <tr><td>30* = 1</td></tr> <tr><td>60 = 3</td></tr> <tr><td>125 = 5</td></tr> <tr><td>P31 without square gauge†</td></tr> <tr><td>30 = Y</td></tr> <tr><td>60 = L</td></tr> <tr><td>125 = N</td></tr> </table>	Adjustment range	P31 with square gauge	30* = 1	60 = 3	125 = 5	P31 without square gauge†	30 = Y	60 = L	125 = N	* For P31 Series 3/8" Port Blocks please order separately. See Kits section.													
Adjustment range																									
P31 with square gauge																									
30* = 1																									
60 = 3																									
125 = 5																									
P31 without square gauge†																									
30 = Y																									
60 = L																									
125 = N																									
<table border="1"> <tr><th>Bowl type</th></tr> <tr><td>Poly bowl with bowl guard</td></tr> <tr><td>Metal bowl without sight gauge</td></tr> <tr><td>Metal bowl with sight gauge</td></tr> </table>	Bowl type	Poly bowl with bowl guard	Metal bowl without sight gauge	Metal bowl with sight gauge	<table border="1"> <tr><th>Drain type</th></tr> <tr><td>Auto drain</td></tr> <tr><td>Manual drain</td></tr> <tr><td>Pulse drain</td></tr> </table>	Drain type	Auto drain	Manual drain	Pulse drain	<table border="1"> <tr><td>P32 & P33 with round gauge</td></tr> <tr><td>2 bar; 30 psig; 0.2 MPa</td></tr> <tr><td>4 bar; 60 psig; 0.4 MPa</td></tr> <tr><td>8 bar; 125 psig; 0.8 MPa</td></tr> <tr><td>17 bar; 250 psig; 1.7 MPa</td></tr> <tr><td>P32 & P33 without gauge</td></tr> <tr><td>2 bar; 30 psig; 0.2 MPa</td></tr> <tr><td>4 bar; 60 psig; 0.4 MPa</td></tr> <tr><td>8 bar; 125 psig; 0.8 MPa</td></tr> <tr><td>17 bar; 250 psig; 1.7 MPa</td></tr> </table>	P32 & P33 with round gauge	2 bar; 30 psig; 0.2 MPa	4 bar; 60 psig; 0.4 MPa	8 bar; 125 psig; 0.8 MPa	17 bar; 250 psig; 1.7 MPa	P32 & P33 without gauge	2 bar; 30 psig; 0.2 MPa	4 bar; 60 psig; 0.4 MPa	8 bar; 125 psig; 0.8 MPa	17 bar; 250 psig; 1.7 MPa	* Unit comes with 0-4 bar or 0-60 psig gauge respectively. † Order round gauges separately - see next page. ‡ Not available with poly bowl with bowl guard. § Not available with P31 Series.				
Bowl type																									
Poly bowl with bowl guard																									
Metal bowl without sight gauge																									
Metal bowl with sight gauge																									
Drain type																									
Auto drain																									
Manual drain																									
Pulse drain																									
P32 & P33 with round gauge																									
2 bar; 30 psig; 0.2 MPa																									
4 bar; 60 psig; 0.4 MPa																									
8 bar; 125 psig; 0.8 MPa																									
17 bar; 250 psig; 1.7 MPa																									
P32 & P33 without gauge																									
2 bar; 30 psig; 0.2 MPa																									
4 bar; 60 psig; 0.4 MPa																									
8 bar; 125 psig; 0.8 MPa																									
17 bar; 250 psig; 1.7 MPa																									
Bold items are most common.	† Not available on P31 Series	‡ Not available with P31 Series.																							

E

Global Modular
Air Preparation Products

Particulate
Filters

Coalescing
Filters

Regulators

Filter/
Regulators

Lubricators

Combinations


Electronic
Proportional

Soft Start/
Dump Valves


Solenoid
Operators

Accessories
Flow Charts

P31C

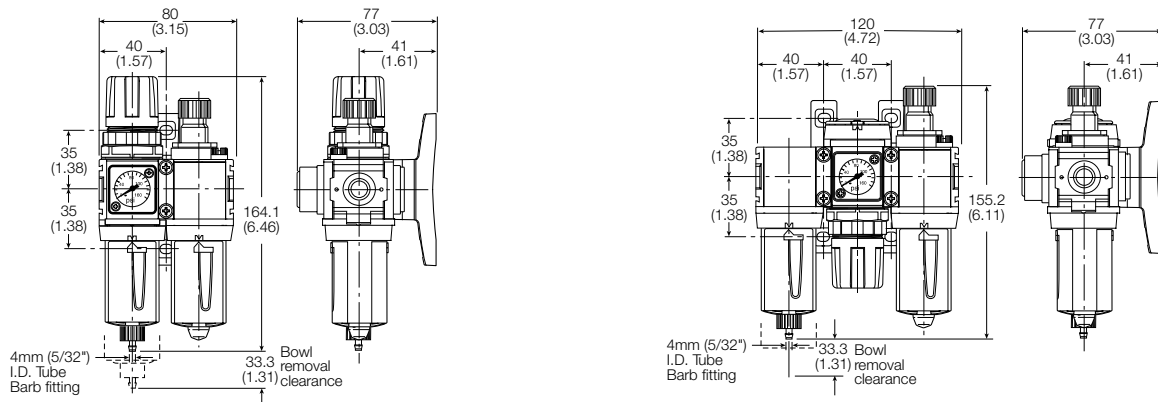

P32C

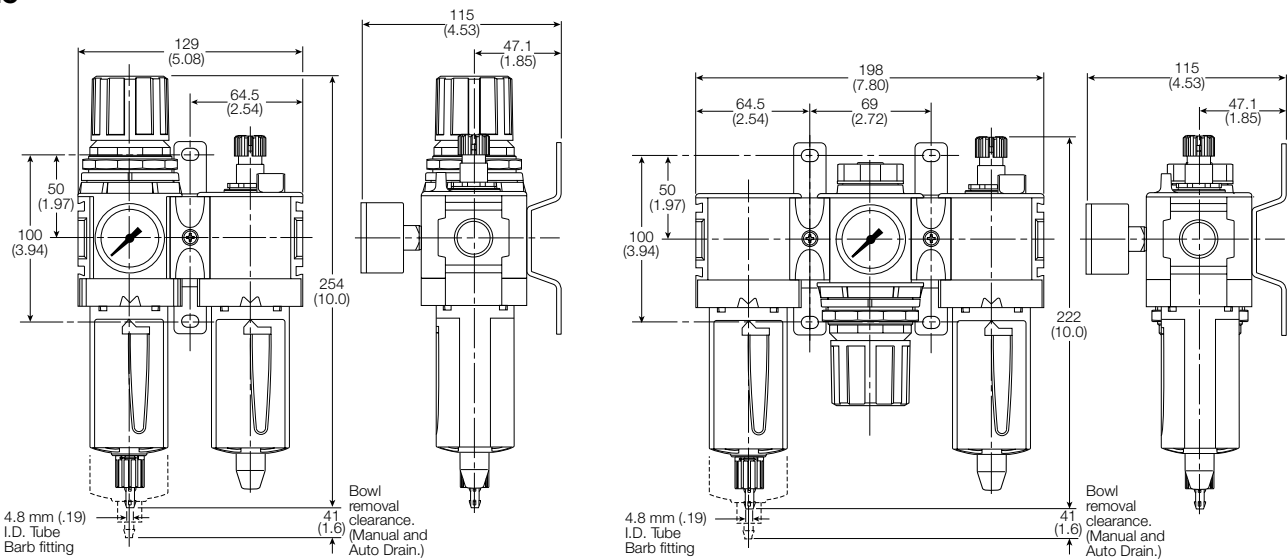

P33C

