

Case Material: AISI 304 stainless steel

Lens Material: Safety Glass

Ring: 304 stainless steel, bayonet mount

Socket: AISI 316 stainless steel

Tube: AISI 316 stainless steel


Movement: Stainless steel

Accuracy: $\pm 1.6\%$

Ambient Temp. Limits Glycerin Fill: -4°F to 150°F (-20°C to 65°C)

Process Temp. Limits Glycerin Fill: -4°F to 150°F (-20°C to 65°C)

Enclosure Rating: IP66

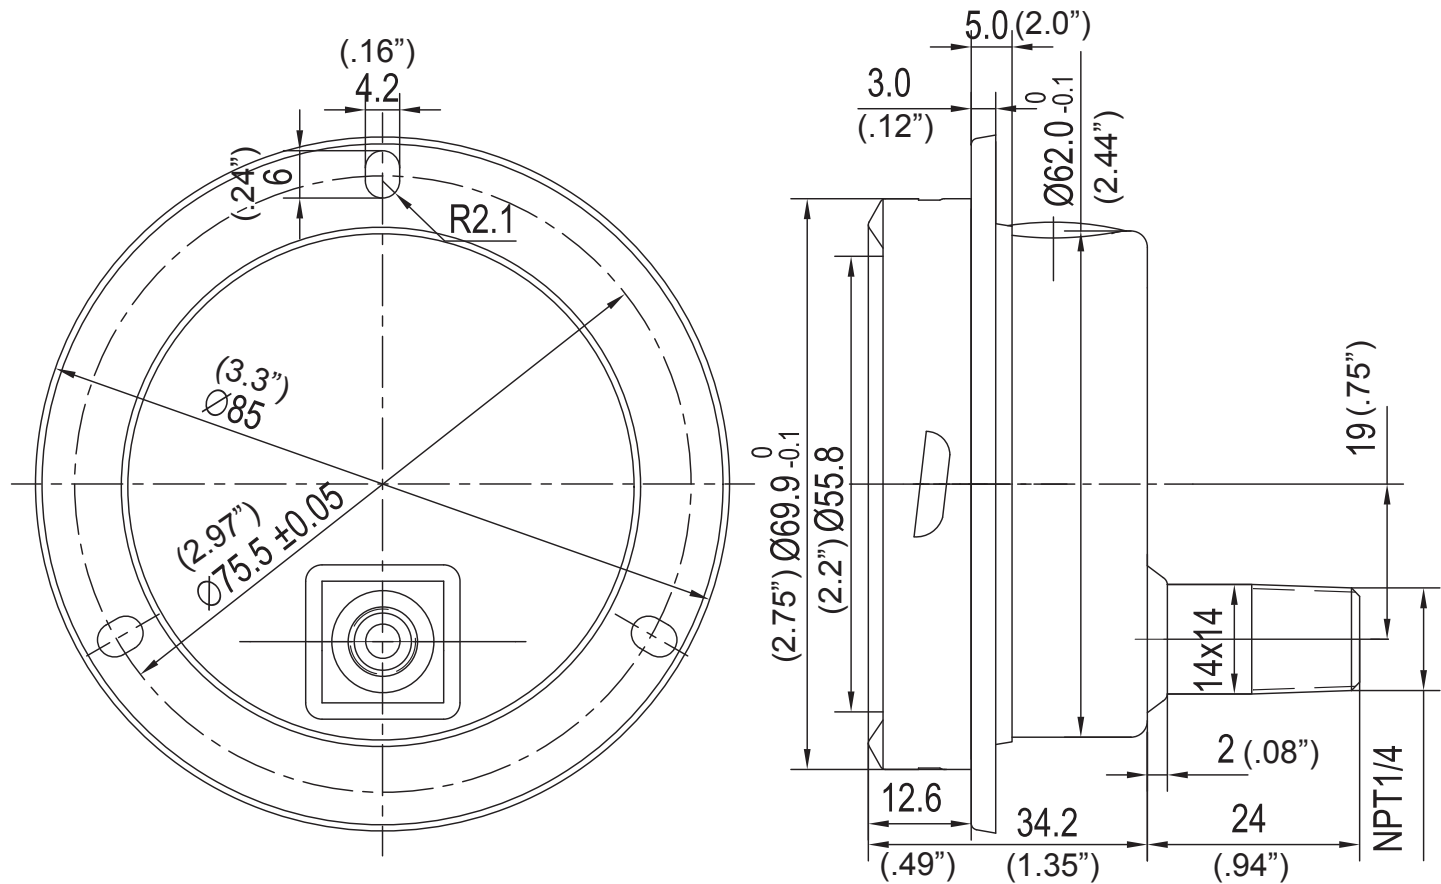

DRAWN BY: DAVID REAY

ENG. APPROVAL: DR

ALL DIMENSIONS IN INCHES/MM

TOLERANCES
(unless otherwise stated)

Fractional:	$\frac{1}{64}$ " 0.4mm
Decimal:	0.06" 1.5mm

REVISION No AND DATE: Jan 5, 2012

TITLE:
2.5" PREMIUM LIQUID FILLED GAUGE, LOWER BAC
CONNECTION C/W FRONT FLANGE

K

DRAWING NO: PFP3793