

Case Material: AISI 304 stainless steel

Lens Material: Acrylic

Ring: AISI 304 stainless steel, crimp-on

Pointer: Aluminum, anodized black

Socket: Brass or AISI 316SS

Bourdon Tube: Phosphor Bronze or AISI 316SS


Movement: Brass or SS

Accuracy: $\pm 2.5\%$ F.S.

Ambient/Process Temp. Limits Dry: -40°F to 200°F (-40°C to 93°C)

Ambient/Process Temp. Limits Glycerin Filled: -4°F to 150°F (-20°C to 65°C)

Enclosure Rating: IP65

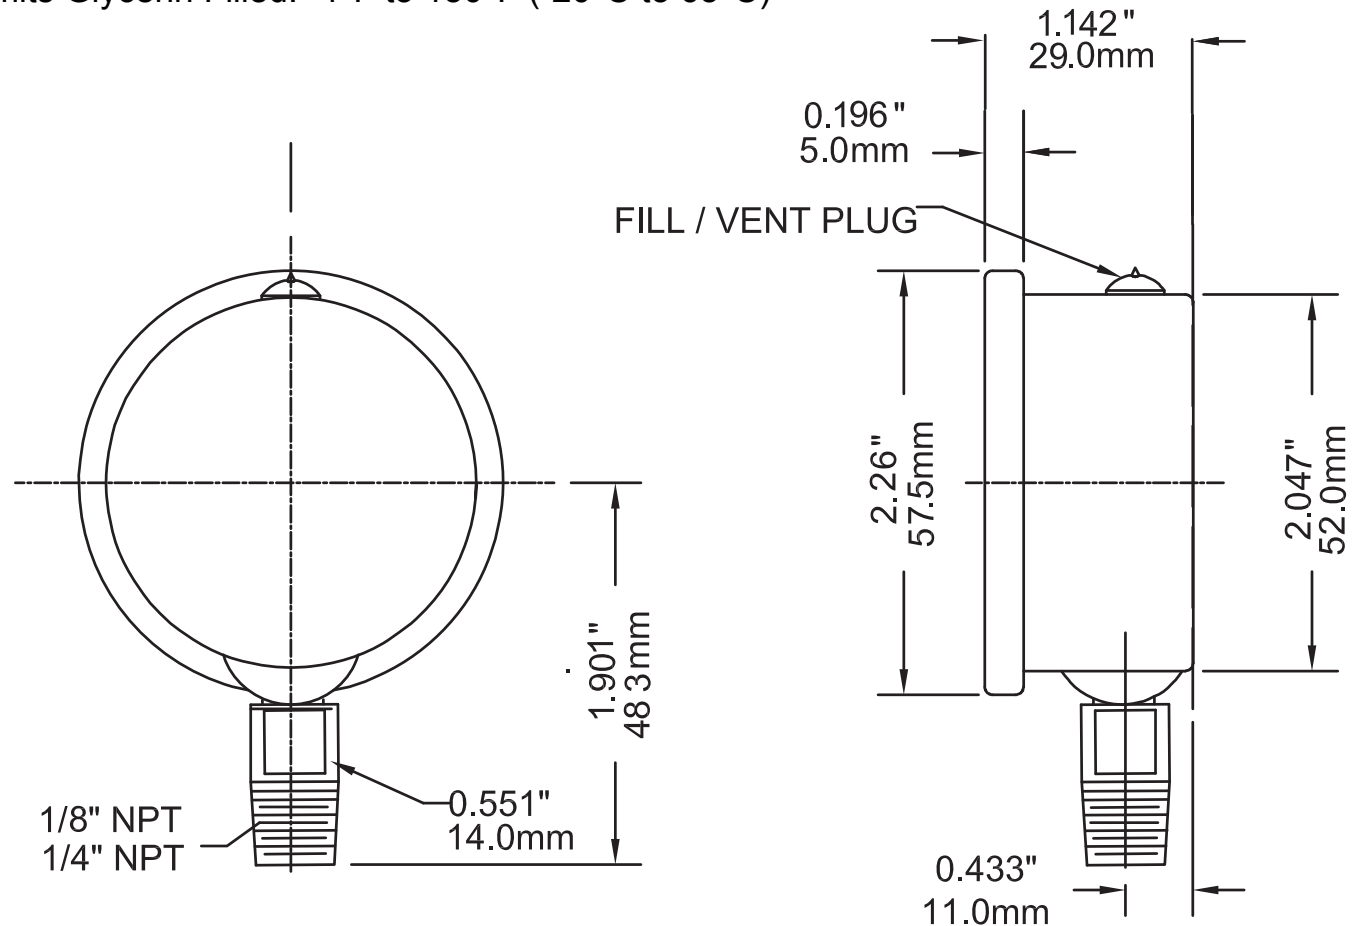

DRAWN BY: ROBIN LUGTU

ENG. APPROVAL:

ALL DIMENSIONS IN INCHES/MM

TOLERANCES
(unless otherwise stated)

Fractional:	$\frac{3}{64}$ " 0.4mm
Decimal:	0.06" 1.5mm

REVISION No AND DATE: #3, Nov. 06, 2014

TITLE:

2.0" STAINLESS LIQUID FILLED GAUGE, BTM CONN
BRASS/PHOSPHOR BRONZE or 316SS INTERNALS

DRAWING NO: PFQ-20-T-Z-A