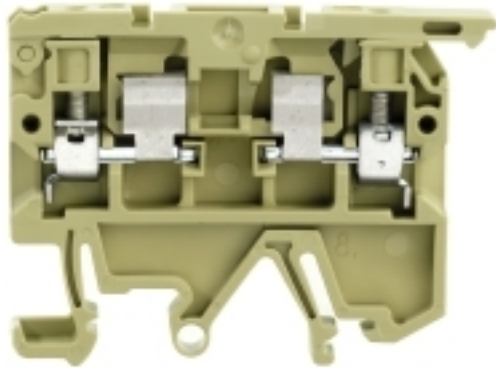


SAK Series
ASK 1/EN LD 15K 24VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	ASK 1/EN LD 15K 24VDC
Order No.	0222760000
Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection, Direct mounting
GTIN (EAN)	4008190024789
Qty.	25 pc(s).

SAK Series
ASK 1/EN LD 15K 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	8.1 mm	Width (inches)	0.319 inch
Height	58 mm	Height (inches)	2.283 inch
Depth	51.5 mm	Depth (inches)	2.028 inch
Net weight	13.44 g		

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C
----------------------------------	--------	----------------------------------	--------

Material data

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, Fuse cartridge, with LED, One end without connector	Tightening torque (clamping screw for copper conductors)	0.6...0.8 Nm
End cover plate required	Yes	Number of levels	1
No. of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Mounting rail	TS 35, TS 32

Additional technical data

Installation advice	Direct mounting	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, rated connection, max.	4 mm ²
Clamping range, rated connection, min.	0.13 mm ²	Clamping screw	M 3
Connection direction	on side	Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²
Gauge to IEC 60947-1	A3	Number of connections	2
Stripping length	9 mm	Tightening torque, max.	0.8 Nm
Tightening torque, min.	0.6 Nm	Torque level with DMS electric screwdriver	2
Twin wire-end ferrules, max.	1.5 mm ²	Twin wire-end ferrules, min.	0.5 mm ²
Type of connection	Screw connection	Wire connection cross section AWG, max.	AWG 12
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	4 mm ²
Wire connection cross section, solid core max. rated connection	4 mm ²	Wire connection cross section, solid core, min. rated connection	0.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²

SAK Series
ASK 1/EN LD 15K 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Display element**

Operating voltage for display, max.	24 V	Type of voltage for indicator	DC
-------------------------------------	------	-------------------------------	----

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Display	LED
Fuse holder (cartridge holder)	Pivoting	Operating voltage, max.	24 V
Type of voltage for indicator	DC		

Rating data

Rated cross-section	4 mm ²	Rated voltage	24 V
Rated current	6.3 A	Current at maximum wires	6.3 A
Volume resistance according to IEC 60947-7-x	1 mΩ	Rated impulse withstand voltage	6 kV
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG		

Classifications

ETIM 3.0	EC000899	ETIM 4.0	EC000899
ETIM 5.0	EC000899	ETIM 6.0	EC000899
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-16
eClass 6.2	27-14-11-16	eClass 7.1	27-14-11-16
eClass 8.1	27-14-11-16	eClass 9.0	27-14-11-16
eClass 9.1	27-14-11-16		

Product information

Descriptive text technical data	Note: max. conductor connection = 2.5 mm ² when using the cross-connector. Twin wire-end ferrules ZH 0.5 to ZH 1.5 can be used.
---------------------------------	--

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1363_20160418_029_ISSUE01.pdf
Engineering Data	EPLAN.WSCAD

Safety noteSafety notice [Safety Information](#)

Creation date January 10, 2018 4:18:38 PM CET

Catalogue status 29.12.2017 / We reserve the right to make technical changes.

3