


**SAK Series
SAKS 5/35**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

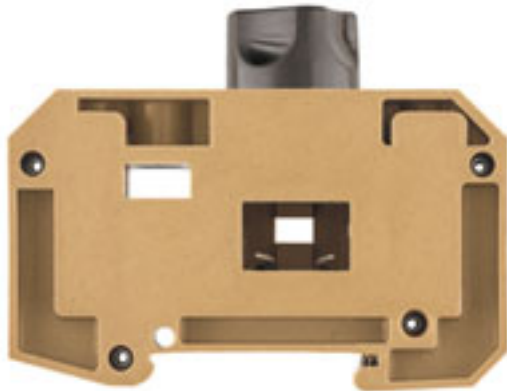

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	SAKS 5/35
Order No.	0502120000
Version	SAK Series, Fuse terminal, Rated cross-section: 16 mm ² , Screw connection, Medium Yellow, Direct mounting
GTIN (EAN)	4008190142360
Qty.	20 pc(s).

SAK Series
SAKS 5/35

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	28 mm	Width (inches)	1.102 inch
Height	80 mm	Height (inches)	3.15 inch
Depth	65 mm	Depth (inches)	2.559 inch
Depth including DIN rail	66 mm	Net weight	108.35 g

Temperatures

Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C
----------------------------------	--------	----------------------------------	--------

Material data

Material	KrG	Colour	Medium Yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	Screw connection, Fuse cartridge, for screwable cross-connection, One end without connector	Tightening torque (clamping screw for copper conductors)	1.2...2.4 Nm
End cover plate required	No	Number of potentials	1
Number of levels	1	No. of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Mounting rail	TS 35
N-function	No	PE function	No
PEN function	No		

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	closed
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	12400-159-154	Current size C (CSA)	63 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	6 AWG
Wire cross section min. (CSA)	14 AWG		

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	16 mm ²
---	--------------------

SAK Series
SAKS 5/35

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Conductors for clamping (rated connection)**

Blade size	1.0 x 5.5 mm	Clamping range, rated connection, max.	16 mm ²
Clamping range, rated connection, min.	1.5 mm ²	Clamping screw	M 4
Connection direction	on side	Gauge to IEC 60947-1	B7
Number of connections	2	Stripping length	13 mm
Tightening torque, max.	2.4 Nm	Tightening torque, min.	1.2 Nm
Torque level with DMS electric screwdriver	4	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 6	Wire connection cross section AWG, min.	AWG 14
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	16 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	1.5 mm ²
Wire connection cross section, finely stranded, max.	16 mm ²	Wire connection cross section, solid core max. rated connection	16 mm ²
Wire connection cross section, solid core, min. rated connection	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	16 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross-section, finely stranded, min.	1.5 mm ²

Display element

Operating voltage for display, max.	400 V	Type of voltage for indicator	AC
-------------------------------------	-------	-------------------------------	----

Fuse terminals

Cartridge fuse	E18	Display	Without LED
Fuse holder (cartridge holder)	for screw fixing	Operating voltage, max.	400 V
Type of voltage for indicator	AC		

Rating data

Rated cross-section	16 mm ²	Rated voltage	400 V
Rated current	63 A	Current at maximum wires	63 A
Standards	IEC 60947-7-3	Volume resistance according to IEC 60947-7-x	0.42 mΩ
Rated impulse withstand voltage	6 kV	Pollution severity	3

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	6 AWG
Conductor size Factory wiring min. (UR)	14 AWG	Conductor size Field wiring max. (UR)	6 AWG
Conductor size Field wiring min. (UR)	14 AWG	Current size C (UR)	40 A
Voltage size C (UR)	600 V		

Classifications

ETIM 3.0	EC000899	ETIM 4.0	EC000899
ETIM 5.0	EC000899	ETIM 6.0	EC000899
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-16
eClass 6.2	27-14-11-16	eClass 7.1	27-14-11-16
eClass 8.1	27-14-11-16	eClass 9.0	27-14-11-16
eClass 9.1	27-14-11-16		

Data sheet

**SAK Series
SAKS 5/35**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Product information

Descriptive text technical data	On connection of over 10 mm ² stranded and 7-wire AWG conductors, the tightening torque is 2 Nm.
Descriptive text accessories	Partition wall TW HP (2.0) order no. 0607000000 only for TS 32

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1313_20160418_604_ISSUE01.pdf
Engineering Data	EPLAN, WSCAD, Zuken E3.S

Safety note

Safety notice	Safety Information
---------------	------------------------------------